



# GOVERNMENT COLLEGE OF ENGINEERING AND CERAMIC TECHNOLOGY

*Established 1941*

Accredited by NAAC with Grade A  
(2015)

*73, Abinash Chandra Banerjee Lane*

*Kolkata-700010*

*West Bengal, India*

*E-mail: [gcctwb@gmail.com](mailto:gcctwb@gmail.com)*

**3.4.3.1: Research Publication in the Journals as notified on UGC CARE  
list during the 2017-2022**

2021-22

The image shows a screenshot of a web browser displaying a journal article on the World Scientific website. The browser's address bar shows the URL: [worldscientific.com/doi/10.1142/S0217732221500729](https://www.worldscientific.com/doi/10.1142/S0217732221500729). The page header includes the World Scientific logo and navigation links for Search, My Cart, and Sign In. The article title is "Relativistic charged stellar model of the Pant interior solution via gravitational decoupling and Karmarkar conditions", published in "Modern Physics Letters A", Vol. 37, No. 14, 2250072 (2022). The authors listed are Neeraj Pant, S. S. G. Gedela, Sarbajit Ray, and Kumar Gaurav Sagar. The article is marked as "Not Accessible". Below the title, there are navigation options: "Previous" and "Next". A "PDF/EPUB" button is visible, along with "Tools", "Share", and "Recommend To Library" options. The abstract text reads: "This paper explores a new embedding anisotropic charged version of a solution to Einstein-Maxwell field equations in four-dimensional spacetime through the Karmarkar conditions and the gravitational decoupling via minimal geometric decoupling (MGD) technique by choosing Pant's interior solution [42] as  $S_{\text{int}}$ ." On the right side, there is a thumbnail of the journal cover for "Modern Physics Letters A", Vol. 37, No. 14, and a "Metrics" section indicating it has been "Downloaded 17 times". The Windows taskbar at the bottom shows the date as 25-05-2022 and the time as 19:30.

Traversable wormhole models in  $f(R)$  gravity

World Scientific  
Connecting Great Minds

International Journal of Modern Physics A | Vol. 37, No. 05, 2250010 (2022)  
Research Paper

**Traversable wormhole models in  $f(R)$  gravity**

B. Mishra, A. S. Agrawal, S. K. Tripathy, and Saibal Ray

<https://doi.org/10.1142/S0217751822500105> | Cited by: 3

PDF/EPUB | Tools | Share | Recommend To Library

**Abstract**

In this paper, we analyze the wormhole solutions in  $f(R)$  gravity. Specifically we sought for wormhole geometry solutions for the following three shape functions: (i)  $h(r) = r_0 + \mu_0 r_0^2 \ln(\frac{r}{r_0})$ , (ii)  $h(r) = r_0 + \gamma r_0 (1 - \frac{r_0}{r})$  and (iii)  $h(r) = \alpha + \beta r$ , under some legitimate physical conditions on the parameters as well as constants involved here with the shape functions. It is observed from the graphical plots that the behavior

International Journal of  
**Modern Physics A**  
Vol. 37, No. 05

Metrics  
Downloaded 19 times

19:34  
25-05-2023

The image shows a screenshot of a web browser displaying a research paper on the World Scientific website. The browser's address bar shows the URL: <https://www.worldscientific.com/doi/10.1142/50218271822500535>. The page header includes the World Scientific logo and navigation links for Subject, Journals, Books, Major Reference Works, Resources For Partners, Open Access, About Us, and Help. The article title is "Anisotropic compact star with a linear pressure-density relationship", published in the International Journal of Modern Physics D, Vol. 31, No. 07, 2250053 (2022). The authors listed are Shyam Das, Bikram Keshari Parida, Koushik Chakraborty, and Saibal Ray. The abstract begins with: "We present a model of compact astrophysical object under General Theory of Relativity using the anisotropic extension of Tolman IV solution. The anisotropy function, derived from the model, remains well behaved throughout the interior of the star. The model satisfies several necessary conditions for a physically realistic compact." The page also features a PDF/EPUB download button, a 'Tools' section with links for 'Share' and 'Recommend To Library', and a 'Metrics' section indicating the article has been downloaded 20 times. On the right side, there is a thumbnail of the journal cover and a 'Details' button. The Windows taskbar at the bottom shows various application icons and the system clock displaying 19:38 on 25-05-2023.

World Scientific  
Connecting Great Minds

Subject Journals Books Major Reference Works Resources For Partners Open Access About Us Help

International Journal of Modern Physics D | Vol. 31, No. 07, 2250053 (2022)  
| Research Paper

# Anisotropic compact star with a linear pressure-density relationship

Shyam Das, Bikram Keshari Parida, Koushik Chakraborty, and Saibal Ray

<https://doi.org/10.1142/50218271822500535> | Cited by: 2

Previous Next

PDF/EPUB Tools Share Recommend To Library

## Abstract

We present a model of compact astrophysical object under General Theory of Relativity using the anisotropic extension of Tolman IV solution. The anisotropy function, derived from the model, remains well behaved throughout the interior of the star. The model satisfies several necessary conditions for a physically realistic compact

International Journal of Modern Physics D  
Vol. 31, No. 07

Metrics  
Downloaded 20 times

Traversable wormhole on the brane with non-exotic matter: a broader view

IOPscience

## Classical and Quantum Gravity

PAPER

### Traversable wormhole on the brane with non-exotic matter: a broader view

Rikpratik Sengupta<sup>1</sup>, Shourak Ghosh<sup>2</sup>, Mehedi Kalam<sup>4,1</sup> and Saibal Ray<sup>3</sup>

Published 12 May 2022 • © 2022 IOP Publishing Ltd

[Classical and Quantum Gravity](#), Volume 39, Number 10

Citation: Rikpratik Sengupta et al 2022 *Class. Quantum Grav.* **39** 105004

DOI: 10.1088/1361-6382/ac11ee

References • Open science •

78 Total downloads

Submit to this Journal

Turn on MathJax

Get permission to re-use this article

Share this article

Abstract

References

Article and author information

### Abstract

In this article, the possibility of construction of a traversable wormhole on the Randall-Sundrum braneworld with non-exotic matter employing the Kuchowicz potential has been studied. We have obtained the solution for the shape function of the wormhole and studied its properties.

19:48 25-05-2022

ScienceDirect

Access through your institution Purchase PDF

Article preview

Abstract

Introduction

Section snippets

References (14)

Cited by (1)

Recommended articles (6)

 Chinese Journal of Physics  
Volume 77, June 2022, Pages 1765–1769



## Tidal effect in ADM formulation under the foliations of spacetime

Indranath Bhattacharyya,<sup>a,\*</sup> Saibal Ray,<sup>b</sup> Aniruddh Pradhan,<sup>c</sup>

Show more

+ Add to Mendeley Share Cite

<https://doi.org/10.1016/j.cjph.2022.03.008> Get rights and content

Abstract

FEEDBACK

1952 25-05-2023



[A Relativistic Compact Stellar M...](#) | [Sci-Hub: peer-reviewed articles of ...](#) | [https://doi.org/10.1155/2021/6966489](#)

[Hindawi](#) | [Journals](#) | [Publish with us](#) | [Publishing partnerships](#) | [About us](#) | [Blog](#)

## Advances in High Energy Physics

[Journal overview](#) | [For authors](#) | [For reviewers](#) | [For editors](#) | [Table of Contents](#) | [Special Issues](#)

Volume 2021 | Article ID 6966489 | <https://doi.org/10.1155/2021/6966489>

[View citation](#)

# A Relativistic Compact Stellar Model of Anisotropic Quark Matter Mixed with Dark Energy

Theophanes Grammeros,<sup>1</sup> Farook Rahaman,<sup>2</sup> **Sabit Ray**,<sup>1,3</sup> Debabrata Deb,<sup>1</sup> and Sourav Roy Chowdhury<sup>2</sup>

[Show more](#)

**Academic Editor:** Sunny Vagnozzi

Received	Revised	Accepted	Published
26 May 2021	15 Sept 2021	08 Oct 2021	08 Nov 2021

**Abstract**  
 The possibility of strange stars mixed with dark energy to be one of the candidates for dark energy stars is the main issue of the present study. Our investigation shows

**On this page**  
[Abstract](#)  
[Introduction](#)  
[Discussion and Conclusions](#)  
[Data Availability](#)  
[Disclosure](#)  
[Conflicts of Interest](#)  
[Acknowledgments](#)  
[References](#)  
[Copyright](#)

**Order**

Views: **326**  
 Downloads: **410**

[Twitter](#) [LinkedIn](#) [Facebook](#) [Email](#)

**Related articles**  
 A Relativistic Compact Stellar Model of Anisotropic Quark

1957  
 25-05-2021

ScienceDirect

Access through your institution Purchase PDF

Article preview

Abstract


Introduction


Section snippets

References (75)






Cited by (27)


Recommended articles (8)



 **Annals of Physics**  
Volume 433, October 2021, 168197






## Anisotropic compact stars: Constraining model parameters to account for physical features of tidal Love numbers

Sreyam Das<sup>a</sup> , Seibal Bar<sup>b</sup> , Anirban Ghosh<sup>c,\*,†</sup> ,  
K.K. Nandi<sup>a</sup> , B.K. Parida<sup>a</sup> 

Show more 

+ Add to Mendeley  Share  Cite

<https://doi.org/10.1016/j.aop.2021.168197>  Get rights and content 

FEEDBACK 

19:59  
25-05-2021



Physical Sciences Forum | Free | Sci-Hub gateway of |

hdpic.com/2675-9584/2/1/29

**MDPI**

## Role of Anisotropy on the Tidal Deformability of Compact Stellar Objects †

by  Shyam Das <sup>1,4</sup>  Mikram Keshari Panda <sup>2,3</sup>  Saikat Ray <sup>2,3</sup> and  Shyamal Kumar Pal <sup>1</sup>

<sup>1</sup> Department of Physics, P.D. Women's College, Jajpur 75101, India  
<sup>2</sup> Department of Physics, Pondicherry University, Karaikal, Puducherry 605014, India  
<sup>3</sup> Department of Physics, Government College of Engineering and Ceramic Technology, Kolkata-700010, India  
<sup>4</sup> Department of Physics, Biju Krishna Girls' College, Howrah 711101, India  
\* Author to whom correspondence should be addressed  
† Presented at the 1st Electronic Conference on Universe, 22–26 February 2021. Available online: <https://ecu2021.sciforum.net/>  
‡ Present address: Department of Physics, Malda College, Malda 732101, India

Phys. Sci. Forum 2021, 2(1), 29; <https://doi.org/10.3390/ECU2021.09011>

Published: 22 February 2021

(This article belongs to the Proceedings of The 1st Electronic Conference on Universe)

[Download](#) [Browse Figures](#) [View Article Metrics](#)

### Abstract

In this paper, we introduce a framework to study the tidal deformation of relativistic anisotropic compact stars. Anisotropic stresses are ubiquitous in nature and widely used in modelling compact stellar objects. Tidal deformability of astrophysical compact objects is a natural effect of gravity, such as one produced by a companion in a binary system. In general relativity, the existence of this reasonable effect of gravity can be quantified by their tidal Love numbers (TLN), which characterize the deformability of a neutron star (NS) from sphericity. The tidal deformability or polarizability parameter of an NS depends on its complex internal structure, and hence, the nature of the compact object can be studied by measuring the TLN. We choose a particular solution, which is the anisotropic generalization of the Tolman IV model, as the interior of the compact stellar object. The physical acceptability of the

2021  
25-05-2021



World Scientific  
Connecting Great Minds

International Journal of Modern Physics D | Vol. 30, No. 12, 2150093 (2021)  
Research Paper

# Modified Chaplygin gas in anisotropic universes on the brane

Sahil Ray, Prasenjit Paul, Bipratik Sengupta, Neeraj Pant, and Riju Nag

<https://doi.org/10.1142/S0218271821500930> | Cited by: 1

PDF/EPUB Tools Share Recommend To Library

## Abstract

In this paper, we study anisotropic universes with Modified Chaplygin gas (MCG) in the context of Randall Sundrum-2 (RS2) braneworld model. The cosmological solutions for Kasowski-Sachs (KS) and Bianchi-I universes with MCG are obtained

International Journal of Modern Physics D  
Vol. 30, No. 12

Metrics

19/12 27-05-2021

World Scientific  
Connecting Great Minds

International Journal of Modern Physics D | Vol. 30, No. 12, 2150092 (2021)  
| Research Paper

# A generalized form of the Raychaudhuri equation

Indranath Bhattacharyya and Saibal Ray

<https://doi.org/10.1142/S0218271821500929> | Cited by: 4

< Previous Next >

[PDF/EPUB](#) [Tools](#) [Share](#) [Recommend To Library](#)

## Abstract

In this work, we have attempted to generalize the Raychaudhuri equation by using the concept of foliation of spacetime. Some studies are performed with a few special cases and their physical implication are discussed.

International Journal of Modern Physics D  
Vol. 30, No. 12

Metrics

13:38 27-01-2021

World Scientific  
Connecting Great Minds

Search My Cart Sign In

Subject Journals Books Major Reference Works Resources For Partners Open Access About Us Help

International Journal of Modern Physics D | Vol. 30, No. 16, 2140005 (2021) Full Access

# Cosmological models with a hybrid scale factor

S. K. Tripathy, B. Mishra, M. Maim Khlopov, and Subal Ray

<https://www.worldscientific.com/doi/10.1142/50318271821400058> | Cited by: 3

< Previous Next >

This article is part of the issue:  
SPECIAL ISSUE: Challenging Problems of Particle Physics and Astrophysics  
Editor: Maim Yu. Khlopov

PDF/Epub Tools Share Recommend To Library

## Abstract

In this paper, we present some cosmological models with a hybrid scale factor (HSF) in

International Journal of Modern Physics D  
Vol. 30, No. 16

Metrics

13:25 27-05-2021

Home | D. Sain | Recent | 34 Jobs | paper | IJER | IJMET

dl.begellhouse.com/references/9d12ba659536a7b0247110777480a779959a9f1c19a229c048a...

# A METHOD TO MITIGATE THE IMPACT OF CYCLING OPERATION AND CARBON EMISSIONS

pages 77-103  
DOI: 10.1615/InterJEnerCleanEnv.2022041410  Get access

**Amlan Chakrabarti**  
Nanula Institute of Technology, Kolkata 700120, West Bengal

**Krishendu Chakrabarty**  
Government College of Engineering and Ceramic Technology, Kolkata, India

## ABSTRACT

In developed countries, the average daily variation in hourly demand for electric power is about 40% of the peak demand. To meet the variation in hourly demand, the steam power plants must vary the generation using cycling operation. Many large countries such as USA, Russia, and European Union use multiple time zones in their territory to match their standard time with the daylight hours. However, these time zones do not focus on reducing the cycling operation of steam power plants. This model proposes the use of a precise algorithm in setting up multiple time zones in a territory to reduce the cycling operation of steam power plants. It recommends setting up multiple time zones in any geographic territory across the globe with an integrated power grid where the longitude difference between the Far East and Far West is more than an hour of solar time. It has been demonstrated by applying this model that the

<https://www.begellhouse.com/references/9d12ba659536a7b0247110777480a779959a9f1c19a229c048a...>

### Begell Recommend



ICHMT  
DIGITAL LIBRARY

ICHMT DIGITAL LIBRARY ONLINE

Terence W. Simon  
Yitzchak Ben-Zur  
Peter Dugan  
Hui Tan  
Pedro J.M. Coelho  
Hideo Yoshida



IHTC  
Since 1987

International Heat Transfer Conference 13

Edith Leclercq  
Graham de Vries Danks

10:11 PM  
7/26/2023

Indian Science Cruiser

Home Current Archives Authors Institutions

Vol. 35, No. 3 (2021) Pages: 21-37 Published: 2021-07-20  
<https://doi.org/10.24004/isc.v35i03n2f2021%2Fv03n2f17%2F201196>

**ALO optimized RLNN Controller for LFC of Deregulated Two-Area Power System**

Mitun Kumar Das<sup>1</sup>, Parthasarathi Bera<sup>2</sup>, Partha Pratim Sarker<sup>3</sup>, Krishwendu Chakrabarti<sup>4</sup>

**Affiliations**

- 1 Department of Electrical Engineering, Indian Maritime University, Kolkata Campus, Kolkata-700088, India
- 2 Department of Electrical Engineering, Kalyani Government Engineering College, Kalyani-741235, India
- 3 Department of Engineering & Technological Studies, University of Kalyani, Kalyani-741235, India
- 4 Department of Electrical Engineering, Govt. College of Engineering & Ceramic Technology, Kolkata-700010, India

MOGOA Based RLNN Controller for LFC of Three Area Deregulated HDG Power System

Publisher: **IEEE** [Click This](#) [PDF](#)

Mitun Kumar Das, Parthasarathi Bera, Partha Pratim Sarker, Krishwendu Chakrabarti **All Authors**

39 Full Text Views

**Abstract**

This paper presents the multi-objective grasshopper optimization algorithm (MOGOA) based reinforced learning neural network controller (RLNN) controllers in the load frequency control (LFC) problems for three area deregulated hybrid distributed generation (HDG) power system. The controller parameters and gains are optimized by MOGOA and its performance is compared with PID controllers. Sensitivity analyses are performed to investigate robustness of

**Document Sections**

1. Introduction
2. Model of HDG Power System

**More Like This**

Load Frequency Control for Hybrid Micro-grid Using MPAC with ANN Under-sudden Load Changes  
 2018 IEEE Smart Grid Conference on Electrical Engineering (SGCEEE) Published: 2018 [Feedback](#)

Supplement your engineering curriculum with new eBooks from IEEE [LEARN MORE >](#)





## A novel approach toward microstructure evaluation of sintered ceramic materials through image processing techniques

Sandipan Chowdhury<sup>1</sup> | Dipika Dhara<sup>2</sup> | Soumit Chowdhury<sup>3</sup> | Partha Haldar<sup>4</sup> | Kingshuk Chatterjee<sup>3</sup> | Tapas Kumar Bhattacharya<sup>1</sup>

<sup>1</sup>Department of Ceramic Technology, Government College of Engineering & Ceramic Technology, Kolkata, India

<sup>2</sup>Department of Information Technology, Maitani Abul Kalam Azad University of Technology, Haringhata, India

<sup>3</sup>Department of Computer Science & Engineering, Government College of Engineering & Ceramic Technology, Kolkata, India

<sup>4</sup>Department of Mechanical Engineering, Government College of Engineering & Ceramic Technology, Kolkata, India

### Correspondence

Tapas Kumar Bhattacharya, Department of Ceramic Technology, Government College of Engineering & Ceramic Technology, Kolkata 700010, India.  
Email: tkb\_ceramics@yahoo.co.in

### Funding information

Department of Science and Technology and Biotechnology, Govt. of West Bengal, Grant/Award Number: 30 (Sanc.)/ST/09 S&T/6G-42508

### Abstract

In this paper, an image processing technique is introduced to measure the grain size and their distributions from the SEM image of copper oxide (CuO) and titanium dioxide (TiO<sub>2</sub>) doped sintered alumina ceramics accurately. The noise present in SEM image is removed by applying low pass Gaussian filter followed by suppression of regional minima over a threshold. The clarity of individual grains and grain boundaries have been done by applying Watershed transform to this preprocessed SEM image. Morphological operations like dilation and erosion are used to make the grain-boundary edges clear and continuous. The individual grain size in  $\mu\text{m}$  scale is measured from the pixel length of the rectangular bounding box drawn around the segmented grain. The normal Gaussian type distribution of grain size is observed in both CuO- and TiO<sub>2</sub>-doped grains in SEM image. The average grain size of CuO-doped alumina grains (2.24  $\mu\text{m}$ ) is very close to  $G_{50}$  value (2.17  $\mu\text{m}$ ), but  $G_{90}$  value of TiO<sub>2</sub>-doped grains (8.59  $\mu\text{m}$ ) is slightly higher than its average grain size (7.96  $\mu\text{m}$ ). The proposed algorithm is compared with linear intercept method and the grain sizes obtained are very close to each other.

### KEYWORDS

alumina, doping, grain size, image processing, scanning electron microscopy

## 1 | INTRODUCTION

The present research in material science and engineering are inclined toward interdisciplinary areas and in these aspect different tools of computer science plays an essential role to evaluate and explain the material properties more accurately. Therefore, emerging research work focuses to frame an accurate and automated feature analysis of the properties of engineering materials.<sup>1</sup> Scanning electron microscopic (SEM) image is the acquisition of useful signal produced by the interactions between electron beams and surface electrons of the specimen. SEM image consists of grains of different phases, grain morphology, surface texture, pores, and inclusion in the microstructure.<sup>2</sup> The single oxide polycrystalline ceramics generally shows grain growth in an irregular manner. The dopant materials inhibit this abnormal

grain growth which is characterized by nonuniform grains of tetrahedra shape having log-normal size distribution. The average grain size is based on near to spherical geometry with not so much wide size distribution.<sup>3,4</sup> These can be studied in-depth with the help of digital image processing technology.<sup>5-7</sup> The properties of engineering materials are related to the variation in grain size, size distribution, and pores present in the microstructure. The microstructures are also controlled by different process parameters like sintering temperature, soaking time, the effect of foreign inclusion, nature and concentration of doping, etc.<sup>8,9</sup> In this context the microstructure related studies based on different computing techniques such as fuzzy logic, neural network, and statistical image analysis should be highlighted. Dutta et al.<sup>10</sup> have studied tensile fractography of AISI 304L N austenitic stainless steel to detect and characterize



## Artificial Neural Network based Dimension Prediction of Rectangular Microstrip Antenna

Pinaki Mukherjee<sup>1</sup> · Alok Mukherjee<sup>1</sup> · Kingshuk Chatterjee<sup>1</sup>

Received: 18 October 2020 / Accepted: 24 December 2021  
© The Institution of Engineers (India) 2022

**Abstract** A computational method for the prediction of dimensions of a microstrip antenna has been proposed in this work. The model uses artificial neural network (ANN) as the chief designing tool for the development of the predictor model. The ANN structure has been designed to take three major output parameters as input, viz. resonant frequency, fractional bandwidth and return loss. The outputs of the model are assigned as the three major design parameters of the antenna model: length, width and position of feed point. Equal number of input and output parameters of the model enhances the importance of the model. Backpropagation topology has been adopted while designing the ANN structure. Validation of the proposed ANN model is carried out by designing and simulating the prototype antenna models using the predicted dimensions in IE3D software. The proposed model yields an average error of 1.014% in predicting resonant frequency using the designed antenna with the model-predicted design parameters. Similarly, the average error is found to be 2.38% in case of bandwidth, both of which validates the effectiveness of the predictor model.

**Keywords** Microstrip patch antenna (MPA) · Artificial neural network (ANN) · Resonant frequency · Bandwidth · Return loss

### Introduction

Microstrip patch antenna (MPA) is a popular name in the field of antenna technology, especially due to the numerous advantages, it offers like light weight, compact as well as flexible structure and design, etc. although it suffers from its major drawback of narrow bandwidth. Hence, microstrip and printed antennas have a wide range of applicability, especially in fields like Global Positioning System (GPS), Bluetooth automotive applications with IEEE802.11, Satellite Digital Audio Radio Services (SDARS) and so on. Designing highly accurate antennas for a particular application in different fields is a great challenge for the engineers. These antennas are characterized by a large number of physical parameters compared to the conventional microwave antennas, thus enhancing the design complexity as well as delicacy to a higher level.

The objective of the proposed work is to develop a neural network-based predictor model to predict the dimensions of a prototype microstrip antenna, like length and width, as well as the feed position for a specified set of desired parameters like resonant frequency, 2:1 voltage standing wave ratio (VSWR) bandwidth and return loss. The present work applies artificial neural network (ANN) for the design of the desired MPA model. The effectiveness of the model lies in the fact that the proposed design is intended to predict all the three major geometric parameters of the antenna model, using only three primary input parameters as mentioned. Most of the works in the literature concentrate majorly on the accurate prediction resonant frequency and bandwidth of the design. Apart from these two major parameters, this present work pays emphasis on the return loss component as well while developing the model, which is highly related to antenna matching. As per the design parameters are concerned,

✉ Pinaki Mukherjee  
pinaki.m@yuboo.co.in

<sup>1</sup> Government College of Engineering & Ceramic Technology,  
Kolkata, West Bengal, India

NJC



PAPER

Check for updates

Chem. Sci., 2022, 13, 46, 5875

## Engineering of the structural and morphological characteristics of MWCNTs employing a nano-dimensional binary oxide coating with enhanced thermal oxidation resistance properties for the tailoring of their reinforcement potential†

Paromita Das,† Savan Kumar Sharma and Barun K. Sanfu\*

The present investigation demonstrates the rational design of a novel nano-hybrid architecture displaying the stable hybridization of inorganic MgO-binary oxide nanoparticles with multiwalled carbon nanotube (MWCNT) structures via a strategic and realistic processing scheme, which in turn resulted in distinguishable core-shell morphological features. Herein, the critical alteration of the surface chemistry of the carbonaceous network and the variable incremental alteration of the oxide loading concentration act as key controllable factors promoting the conformal deposition and stable assembly of an inorganic binary oxide shell network at an interfacial position, with a consequent enhancement of the thermal stability of the nano-hybrid architecture. The detailed structural evolution of the core-shell nano-hybrid structure and its key characteristic features have been verified in detail via TG-DTA, FTIR, XRD, Raman, SEM, TEM/SAED, and EDS analysis. It has been observed that thermal treatment at a suitable temperature readily induces a stable passivation layer of inorganic MgO-binary oxide thin film with a thickness of ~50 nm, which strongly assists the structural reorganization of the core MWCNTs in a positive way, thereby strongly preserving the shape, purity, and structural integrity of the inner CNTs under harsh environmental conditions. Finally, the present investigation provides a detailed mechanistic view unveiling the structure-property relationship, explaining the thermal oxidation stability and exploring the reinforcement potential of the nano-hybrid structure on the macroscale.

Received 6th December 2021,  
Accepted 1st March 2022

DOI: 10.1039/d1sc05875g

nc/oljnc



## Fabrication, characterization and optimization of industrial alpha alumina powders based ceramic membrane supports and its applicative potential for CO<sub>2</sub>/N<sub>2</sub> separation

Sovan Kumar Sharma<sup>a</sup>, Paromita Das<sup>a,1</sup>, Bishnupada Mandal<sup>b</sup>, Barun K. Sanful<sup>b,\*</sup>

<sup>a</sup> Department of Ceramic Technology, Government College of Engineering and Ceramic Technology, 71, Alameda Chandra Bhanja Lane, Kolkata 700010, West Bengal, India

<sup>b</sup> Department of Chemical Engineering, Separation Science Laboratory, Indian Institute of Technology Guwahati, Gauhati 781005, Assam, India

### ARTICLE INFO

**Keywords:**  
Industrial grade alpha alumina support  
Ceramic coating  
Sol-gel processing  
Multilayer graded membranes  
CO<sub>2</sub> separation

### ABSTRACT

In this investigation, an economically feasible strategy has been proposed for the fabrication of good quality membrane support by utilizing low-cost industrial-grade alumina powders, coded as A-104G and C7-1200G with an average particle size of 6.44 and 1.41 μm, respectively. Therein, the meticulous alteration of the processing parameters and the targeted utilization of industrial grade powders with distinctive particle morphologies have allowed promising aspect towards governing the sintering and densification behavior, pore morphology and the microstructural facets of the sintered alumina supports. More precisely, while connecting the structure-property relationship aspect, the broader particle size distribution and the higher quartile ratio of C7-1200G powder leads to engineer relatively higher average pore size and wider pore size distribution in the as-sintered sintered membrane support system in comparison to the narrow particle sized and low quartile ratio comprising A-104G powder. Additionally, the pore surface morphology of the intermediate layers deposited over the two distinctive membrane support systems via implementing differential colloidal chemistry of the respective sols have also been demonstrated for the precise understanding of the role of particle morphology on the progressive pervaporation of pore characteristics of the overall asymmetric graded membrane substrate. Finally, the performance evaluation of the alumina-silicate membrane layer assembled on the tailor-made multilayered graded rod-continuous alumina support system has been reported which revealed comparable

# Innovative Approach to Evaluate the Wearing of Nano-TiO<sub>2</sub>-Doped Alumina Ceramics in the Light of Image Modeling

**Partha Haldar**

Department of Mechanical Engineering,  
Government College of Engineering and Ceramic  
Technology,  
Kolkata 700030, India  
e-mail: parthahaldar@gcct.ac.in

**Alok Mukherjee**

Department of Electrical Engineering,  
Government College of Engineering and Ceramic  
Technology,  
Kolkata 700030, India  
e-mail: alok@gcct.ac.in

**Tapas Kumar Bhattacharya<sup>1</sup>**

Department of Ceramic Technology,  
Government College of Engineering and Ceramic  
Technology,  
Kolkata 700030, India  
e-mail: tapasbhattacharya@gcct.ac.in

**Nipu Modak<sup>1</sup>**

Department of Mechanical Engineering,  
Jadavpur University,  
Kolkata 700032, India  
e-mail: nipu.modak@jadavpuruniversity.in

*The present research is emphasized on the microscopic observation of post-wear surface of nano-TiO<sub>2</sub>-doped alumina ceramics to assess wearing by promising image processing algorithms, namely, entropy analysis, Sobel edge detection technique, and entropy filtered image histogram analysis in relation to the extent of doping. The experimental results of specific wear-rate showed an indicator with the extent of microfracturing of grains, plowing of materials and debris formation on the wear track after a long wear cycle in terms of entropy level, edge density index, and entropy filtered image, and the nature of histogram at different doping levels. The lowest value of entropy level and edge density index is shown at the level of 1 wt% TiO<sub>2</sub>-doped alumina ceramics due to the presence of low number of granularity and microfracture grains on the wear track cause the lowering of specific wear-rate. The histogram of entropy filtered image for 1 wt% doping is more uniformly distributed with the highest frequency and lowest skewness factor over a wide range of intensity values. [DOI: 10.1115/1.4051904]*

**Keywords:** dry friction, wear, alumina-titania ceramics, image processing, edge detection, entropy analysis

<sup>1</sup>Corresponding authors.  
Contributed by the Tribology Division of ASME for publication in the *JOURNAL OF TRIBOLOGY*. Manuscript received June 3, 2021; final manuscript received July 21, 2021; published online August 11, 2021. Assoc. Editor: Neelganga Chakrabarti.

## 1 Introduction

Wear is an important tribo-mechanical property of materials related to the progressive loss of material from the solid surface by mechanical interaction of two sliding surfaces under load [1]. Therefore, knowledge of wear-rate is of technical importance for assessing the life of the materials. Wear can quantitatively be measured by a mass loss method, dimensional change method, volume loss method in relation to testing parameter, contact geometries and environmental condition, etc. [2]. The incorporation of nano-additives in alumina ceramics improved wear resistance by modifying microstructure, inhibiting abnormal grain growth, and controlling the volume fraction and size distribution of nano-particles in reinforcing matrix [3]. The importance of alumina lies heavily in bio-ceramic owing to its properties like excellent corrosion resistance, good biocompatibility, low friction, high wear resistance, and high strength [4], which are indispensable properties for prosthesis-technology. It is further observed that the addition of titania as a sintering aid in alumina sample improves the tribo-mechanical properties of the ceramic [5–7].

The present research scenario in material science and engineering are inclined towards interdisciplinary areas by adopting soft computing to explain the properties of engineering materials more accurately. Therefore, emerging research work should be framed to understand the properties of engineering materials more accurately by applying the algorithm of soft computing in an automated manner [8,9]. The scanning electron microscopic (SEM) image is a digital domain of two-dimensional (2D) intensity map. Each pixel of SEM image corresponds to the captured signal intensity at every point. Prolong action of mechanical stress on the surface of the specimen results in microfracturing, axial crack formation, and plowing of materials and debris formation. The morphological features of the worn-out surface are to accumulate the induced signals, and image processing techniques have been implemented to judge the specific wear-rate using different deterministic parameters of the image analysis methods [10]. Application of various image processing methods is found widely in the literature in various fields like remote sensing [11], medical field [12], encoding system [13], machine vision [14], color processing [15], pattern recognition [16], etc. Alturki et al. [17] measured the cavitation erosion on stainless steel surface by 2D discrete wavelet packet transform in terms of mean depth penetration (MDP). The result showed that MDP values were inversely proportional with corrosion in contact with the oil-water emulsion. The application of image processing techniques is in use in cutting tool wear prediction for a long time. Jarkovic et al. [18] have developed a flexible system that can measure tool wear with high spatial resolution and good accuracy. They have performed the digitization of the image followed by image analysis and finally evaluated a set of tool wear parameters. They used a vision system to measure tool wear using a charge-coupled device camera and laser diode with a linear projector. Wang et al. [19] measured flank wear in milling by analyzing successive images captured by a high-speed camera in a periodic manner without stopping the spindle. The successive operation-like edge detection by applying Sobel operator, edge enhancement, thresholding, edge line extraction, and morphological operation is used to obtain reference line of the image. Lokani et al. [20] developed an algorithm to monitor tool wear for a linear broaching based on the overall wear area. They automated the method with image cropping and digital image processing tools to determine the affected area without requiring any manual intervention. Thakre et al. [21] also developed an automatic calibrated system to monitor flank wear of carbide tool insert by a machine vision system by monitoring wear related parameters like average tool wear width, tool wear area, tool wear perimeter, etc. The vision system result of average tool wear lies within 3% error range with respect to the experimental results. Ken et al. [22] also monitored tool wear of modern computer numerical control machine in real-time and established a good correlation with the expected wear characteristics. They showed that the extent of



## Potential of Pumped Hydro Storage as an Electrical Energy Storage in India

Partha Halder<sup>1</sup> · Nipu Modak<sup>2</sup>

Received: 22 January 2021 / Accepted: 27 August 2021  
© The Institution of Engineers (India) 2021

**Abstract** Congestion in power flow, voltage fluctuation occurs if electricity production and consumption are not balanced. Application of some electrical energy storage (EES) devices can control this problem. Pumped hydro-electricity storage (PHS), electro-chemical batteries, compressed air energy storage, flywheel, etc. are such EES. Considering the technical maturity level, storage time, capital cost, life cycle, potential etc., in India, PHS is found to be the best possible option with no additional fuel needs. In India, the Central Electricity Authority (CEA) has identified 63 sites where 96,534 MW PHS can be installed but at present 9 PHS with a total installed capacity of 4785.6 MW are in operation and 1205 MW is under construction [February 2021, CEA]. Therefore, India has wide scope to enhance its hydropower generation along with PHS. Generally, the lifespan of a PHS project is at least 50 years and these hydro projects help in reducing carbon footprint of Indian power sector as well as conserving scarce fossil fuels. So, in this paper, all the technical views related to PHS are discussed along with total PHS scenario of India as well as the constraints and policies are summarized.

**Keywords** Electrical energy storage (EES) · Pumped hydroelectricity storage (PHS) · Hydropower of India

Partha Halder  
partha.prsach@gmail.com

<sup>1</sup> Mechanical Engineering Department, Government College of Engineering and Ceramic Technology, Kolkata 700010, India

<sup>2</sup> Mechanical Engineering Department, Jadavpur University, Kolkata 700032, India

### Introduction

The demand of electrical energy varies between day and night, week days and holidays, daily and weekly [1]. To meet this demand, base load power plants like thermal and nuclear power stations are providing continuous supply [2]. But to cater the peak load demand for a few hours of a day, in India, the generating units maintain large production capacity. This practice in turn results in uneconomical, inefficient, oversized, non-environmental power system and hence the generating companies earn less revenue. But if electrical energy storages (EES) are considered as the part of power system, as shown in Fig. 1, the generation capacity should meet only the average electrical demand and thus system efficiency improves. EES is a methodology by which electrical energy from the grid can be stored into a suitable form, and it can be restored back into electrical energy as per requirement [3]. This methodology provides opportunity to store excess energy of grid at the times of lower demand, lower generation cost or from intermittent energy sources and the stored energy can be utilized at the times of higher demand, higher generation cost [4]. It is well known that the conventional electricity generation has no storage facility and as a result the supply should be controlled in such a way that it matches the demand [5]. This type of controlled generation is quite difficult for the renewable energy generating systems since the sources like solar, wind, etc. are intermittent in nature. Therefore, EES systems are urgently needed to be tie up with renewable energy generating systems [6]. On the other hand, India has already started utilizing its renewable energy potential and as on 28.02.2021, the renewable energy capacity (excluding large hydro) of India has reached 92,970.48 MW. Wind provides 41.72% of renewable power, while 42.04% is provided by solar



## Cupola slag reutilization for sustainable waste management: review and economic analysis

S. Chakravarty<sup>1</sup> · P. Halder<sup>2</sup> · T. Nandi<sup>1</sup> · G. Suttardhar<sup>3</sup>

Received: 2 March 2021 / Revised: 8 June 2021 / Accepted: 20 July 2021  
© Islamic Azad University (IAU) 2021

### Abstract

Investigation of recycling and reutilizing capability of industrial wastes is essential to attend the vision of sustainable waste management. One such industrial waste is cupola slag, a by-product of grey cast iron. This slag mainly ends up in dump yards or landfills due to a lack of proper attention. This article aims to analyse available previous literature to understand every possible door for reutilizing cupola slag to attain the goal of sustainable waste management. Primary importance is given to the utilization of cupola slag in the building industry as partial or full substitution of fine and coarse natural aggregates as well as cement for making concrete. The reusability has been analysed by extensive investigations on microstructure, chemical and physical properties of cupola slag starting from its origin. Very few analyses of the utilization of cupola slag can be found in different sectors such as for making glass ceramics, synthesizing zeolite and phosphorus-based fertilizers, making ceramic foams, road construction and use as artificial pozzolan. The extensive analysis not only opened a huge opportunity to ensure reuse of industrial waste, i.e. cupola slag but also utilization can provide some added advantages of being eco-friendly. A sustainable future can be assured by more rigorous study and implementation of methods for the reuse of cupola slag.

**Keywords** Waste recycle · Cupola slag reuse · Green concrete · Pozzolan

### Introduction

The term sustainable application in any process is described as the system of improvement which meets the demand of the present without affecting the future generation's ability to fulfil their demands (Silvestre and Jiréd 2019). The rapid growth of industrialization to meet the demand of exponential population growth leads to a large amount of industrial waste. These industrial wastes are extremely toxic to the environment, thus should be properly decomposed, reused or recycled for reaching the goal of a cleaner environment.

Cast iron is a very potent material that has numerous applications such as in machine tool beds, automobile components, valve bodies, soil pipe, shipbuilding, manhole cover, and sanitary castings, etc. (Berns and Theisen 2006). Cast iron is produced in cupola by melting pig iron, scrap, coke and limestone together in a proper ratio termed as the charge (Hansson 1989). This melting process has output of molten grey cast iron (of different grades and alloys) along with by-products, i.e. slag. The data from the latest census (2014) indicate that there are about 47,145 casting plants worldwide, among them 21,532 (45.7%) are cast iron plants. A total sum of 47.795 million tonnes of cast iron is produced in these cast iron plants per annum (Sotofski et al. 2016). Global cast iron production increased by 2.4 million tonnes in 2013 to 2014. India is producing 10% of the global production which is about 11 million tonnes of castings per annum. 68% of total castings produced in India are cast iron. There are about 5000 cupolas that are producing about 7.5–8 million tonnes of castings in India. Normally 5–6% slag is produced in every run and it is highly dependent on the foundry location, melting technology, properties of charge and many other factors of the foundry so, it varies from foundry to foundry (Berley 2001). This results in

Editorial responsibility: F. ŞEN

✉ P. Halder  
partha.jamech@gmail.com

<sup>1</sup> Mechanical Engineering Department, Jadavpur University, Kolkata 700032, India

<sup>2</sup> Mechanical Engineering Department, Government College of Engineering and Ceramic Technology, Kolkata 700010, India

<sup>3</sup> National Institute of Technology, Large-I, Imphal, Manipal 795004, India

Published online: 26 July 2021



Springer



## Scope for cupola slag reuse in construction: a sustainable green solution

R. Sikder<sup>1</sup> · S. Chakravarty<sup>1</sup> · P. Haldar<sup>2</sup> · T. Nandi<sup>1</sup> · G. Sutradhar<sup>3</sup>

Received: 4 August 2021 / Revised: 19 January 2022 / Accepted: 24 April 2022

© The Author(s) under exclusive license to Iranian Society of Environmentalists (ISEE) and Science and Research Branch, Islamic Azad University 2022

### Abstract

Impact of different industrial wastes in environment is a major threat nowadays. One such industrial waste, cupola slag, a by-product of cast iron production in cupola furnace has no commercial utilization due to lack of proper waste management practices. Thus, it segregates into landfills causing a major damage to environment. Research indicates that cupola slag exhibits good hydraulicity and pozzolanic properties when compared with conventional building materials. This opens a door to reuse cupola slag in making cement concrete. The major constituents of cement concrete namely cement, fine and coarse aggregates can be partially or completely substituted by cupola slag to develop green concrete. This work presents a critical review of past studies on development of green concrete using cupola slag as a substitute for conventional building materials. The cost of producing such novel green concrete has also been compared with conventional controlled concrete mix which followed by detailed analysis of limitation and approaches to overcome them. This work will be beneficial to the foundry owners and researchers working in this field.

**Keywords** Green concrete · Cupola slag · Solid waste management · Environmental pollution

### Introduction

The cupola is used to melt pig iron and fluxes for producing grey cast iron. A secondary product is produced in this system is referred as cupola slag. 40–80 kg slag is produced per ton of cast iron manufacturing (Pribulova et al. 2019). Cupola slag seems as a stony and amorphous material. It is a fused product that contains oxidized impurities of metals and silicon oxide (Aderibigbe and Ojubo 1982). Melting technology in cupola along with constituent of input charge influences chemical composition of cupola slag. Cupola slag consists of  $Al_2O_3$ ,  $MnO$ ,  $SiO_2$ ,  $MgO$ ,  $TiO_2$ ,  $CaO$ ,  $Fe_2O_3$ ,  $Cr_2O_3$ ,  $Na_2O$ , as mentioned by various academicians

(Aderibigbe and Ojubo 1982; Strop et al. 2003; Bakaraman and Ligoria 2015; Mistry et al. 2016; Ladomerský et al. 2016; Patel et al. 2016; Pribulová et al. 2018; Varkey 2018; Pribulova et al. 2019). Rate of crystallization and slag viscosity while cooling directly depends on chemical composition of the slag. Thus, the porosity, dimension and properties of solid slag depend on chemical composition. Possible use of slag can essentially be affected by this fact (Barićová et al. 2018). There are 47,145 cast iron plants existing all over the world amongst them 21,532 are using cupola for melting. The amount of cast iron production is 47.795 million tons per year worldwide. India alone produces 11 million tons of cast iron every year. There are 5000 cupola furnaces in

Editorial responsibility: M. Abbasquee

✉ P. Haldar  
partha.jamsh@gmail.com  
R. Sikder  
sikder\_rakesh1995@gmail.com  
S. Chakravarty  
somenchakravarty.edu@gmail.com  
T. Nandi  
titan\_nandi@yahoo.co.in

G. Sutradhar  
gust\_1963@rediffmail.com

<sup>1</sup> Department of Mechanical Engineering, Jadavpur University, Kolkata 700032, India

<sup>2</sup> Department of Mechanical Engineering, Government College of Engineering and Ceramic Technology, Kolkata 700010, India

<sup>3</sup> National Institute of Technology, Langol, Imphal, Manipur 795004, India



# EXPERIMENTAL INVESTIGATION AND OPTIMIZATION OF MRR IN $\mu$ -ECDM PROCESS BY TAGUCHI, RSM, PSO AND ANN

Md Niamot Ali<sup>1</sup>, Soumyabrata Chakravarty<sup>2</sup>, and Partha Haldar<sup>3\*</sup>

*Received: May 22, 2021; Revised: July 24, 2021; Accepted: September 30, 2021*

## Abstract

Electrochemical Discharge Machining process applied for machining of both electrically conducting and non-conducting materials. It became crucial to measure the material removal rate while processing of advanced materials. This paper deals with comparison of optimization of MRR by different techniques like Taguchi method, RSM, PSO and ANN during  $\mu$  profile generation on glass material using  $\mu$ -ECDM process. The experiments were conducted using the combinations of three input parameters such as voltage, electrolyte concentration and pulse frequency based on different experimental design. Increase in voltage and electrolyte concentration results in MRR increase, but with increase in pulse frequency MRR decreases. Optimal value of MRR along with the parametric combinations using all four techniques has been derived and compared.

**Keywords:** MRR;  $\mu$ -ECDM, Taguchi L9 array, ANOVA, PSO; ANN; RSM

## Introduction

The quality of life of all human beings continues to increase day by day with the invention of new products and components which are developed by different manufacturing methods. Machining is one of the most important manufacturing processes by which different products can be produced with dimensional accuracy in the range of millimeter to nanometer. Conventional machining processes are mainly turning, milling drilling which are performed in machine tools such as lathe, shaper, milling machine and drilling machine etc. These techniques are mainly used for higher material removal rate and large dimension objects. The parts produced by conventional machining are robust.

Machining of sophisticated and advanced materials with complex and intricate shape is almost impossible with existing conventional processes (Grzesik, 2016). Thus, several non-conventional machining such as ultrasonic machining (USM), electrochemical machining (ECM), electric discharge machining (EDM), abrasive jet machining (AJM) etc. have developed over the years (Khandekar and Chakraborty, 2016). The demand of advanced engineering material and precise manufacturing of near net shape product cannot be achieved alone by non-traditional machining, so further extension have been proposed in the form of hybrid machining (Shrivastava and Dubey, 2014).

<sup>1</sup> Mechanical Engineering Department, Nanya Bahadur Engineering College, Kolkata-700112, India

<sup>2</sup> Mechanical Engineering Department, Jalpaiguri University, Jalpaiguri-786001, India

<sup>3</sup> Mechanical Engineering Department, Government College of Engineering and Ceramic Technology, Kolkata-700010, India. E-mail: partha.haldar@gmail.com

\* Corresponding author

# Tribological Behavior of Alumina Ceramics With Nano-TiO<sub>2</sub> as a Sintering Aid in Non-Conformal Contact

Partha Haldar

Department of Mechanical Engineering,  
Government College of Engineering &  
Ceramic Technology,  
Kolkata 700 010, India  
e-mail: parthahaldar@gcet.ac.in

Tapas Kumar Bhattacharya<sup>1</sup>

Department of Ceramic Technology,  
Government College of Engineering &  
Ceramic Technology,  
Kolkata 700 010, India  
e-mail: tapasbhattacharya@gcet.ac.in

Nipu Modak<sup>2</sup>

Department of Mechanical Engineering,  
Jadavpur University,  
Kolkata 700 032, India  
e-mail: nipu.modak@jau.ac.in

The study emphasized the sintering behavior and tribo-mechanical properties of alumina ceramics by nano-TiO<sub>2</sub> addition as a sintering aid. With increase in sintering temperature, the bulk density of alumina has increased gradually and optimized at 1600 °C. The optimizing effect of densification at 1600 °C is 98.25% by the addition of 1 wt% nano-TiO<sub>2</sub>. The maximum axial reliability of flexure in alumina grains was at 1600 °C and causes optimization of densification by addition of 1 wt%. The excess addition of TiO<sub>2</sub> formed low dense Al<sub>2</sub>TiO<sub>5</sub>, appearing as a secondary phase at grain boundaries and does not significantly improve densification. Fracture toughness increases and coefficient of friction decreases with the addition of nano-TiO<sub>2</sub> in alumina matrix. The addition of 1 wt% nano-TiO<sub>2</sub> improved hardness to 8.82% and reduces specific wear-rate to 45.50%. The addition of 1 wt% nano-TiO<sub>2</sub> greatly influenced the microstructure of sintered Al<sub>2</sub>O<sub>3</sub>. The morphology was sharply changed from hexagonal columnar shape to order sub-void orientation which also directly impact the tribo-mechanical properties of sintered alumina. The addition of 1 wt% substantially decreases wear track depth as observed by a 3D surface profilometer. Microscopic observation of the worn-out surface showed that wearing is majorly caused by plastic deformation and abrasion. [DOI: 10.1115/1.4051128]

**Keywords:** sintering, mechanical properties, wear resistance, alumina ceramics, dry friction, surface properties and characterization, wear mechanisms

## 1 Introduction

Alumina ceramics is a prevalent material and finds numerous applications owing to its outstanding properties like low density, high hardness, high stiffness, thermal and chemical inertness, wear and corrosion resistance, and ease of processing even at elevated temperature [1–4]. Alumina ceramic has potential applications in various engineering fields like lining for pipes, vessels, pumps, etc., cutting tools, laser tubes, high temperature electrical insulators, grinding media, wear pads, components of bearings, electronic components, aircraft brakes, aerospace, automobiles, defence especially in jet-engine, engines, and even in biomedical [5–10]. However, alumina possesses relatively low fracture toughness and as a result, the material becomes brittle which in turn limits the application of alumina. The basic differences between conformal and non-conformal type contact lie on the area of contact between the tribo-pair. Conformal contact implies that the mating surfaces have higher geometrical conformity during cylindrical pin-on-disk tribotest [11]. On the other side, the mating pairs are considered as non-conformal contact if they have very less conformity in terms of their contact area like ball on disk tribotest. In this case, the area of contact is less and therefore, a small amount of normal load can generate large amount of pressure on the surface. Plenty of research has been carried out regarding enhancement of tribological behavior as well as fracture toughness in conformal contact with the addition of different oxides like MgO, CaO, TiO<sub>2</sub>, ZrO<sub>2</sub>, Y<sub>2</sub>O<sub>3</sub>, Nb<sub>2</sub>O<sub>5</sub> [12–18], and non-oxides like TiC, SiC, TiN, TiB<sub>2</sub>, CaF<sub>2</sub>, carbon nano-tube (CNT) [19–23], etc. as a


secondary phase in alumina matrix. But a similar study for non-conformal contact is hardly found. It is also well known that friction is a system response. Counter surface is vital in determining coefficient of friction (COF) as reported by Kerkovik et al. [14]. It was also reported in this context that COF increased from 0.55 to 0.70 when Al<sub>2</sub>O<sub>3</sub> ball is substituted by Ytria-stabilized Tetragonal Zirconia Polycrystal ceramics (Y-TZP) ball as a counter surface on sintered alumina. Moreover, it was reported that other factors like sintering temperature, environment, and microstructure have major influence on the tribo-mechanical properties of CoO added Y-TZP ceramic system sliding on Al<sub>2</sub>O<sub>3</sub> [24,25].

Winkler et al. [26] reported that the solubility limit of titanium dioxide in alumina is up to 0.27 wt% for samples fired in air in the temperature range from 1300 to 1700 °C. They also found that titanium in doped samples of alumina is present as both Ti<sup>3+</sup> and Ti<sup>4+</sup> in samples fired in air. The aluminum titanate (Al<sub>2</sub>TiO<sub>5</sub>) phase is formed when the amount of TiO<sub>2</sub> goes above the solubility limit and temperature is also above 1200 °C. The Al<sub>2</sub>TiO<sub>5</sub> phase formation is due to the transport of Al<sup>3+</sup> through the TiO<sub>2</sub> layer followed by reaction with TiO<sub>2</sub>. The high diffusivity of Al<sup>3+</sup> in TiO<sub>2</sub> might be responsible for the formation of Al<sub>2</sub>TiO<sub>5</sub> phase [27]. The second phase, Al<sub>2</sub>TiO<sub>5</sub> in alumina ceramics, can enhance fracture toughness [28–30]. Lee et al. [7] showed that inclusion of nano-meter-sized particles of TiO<sub>2</sub> in alumina causes enhancement in fracture toughness and wear resistance. Wang et al. [31] fabricated *in situ* alumina/aluminum titanate ceramics using spark plasma sintering with micro and nano-sized powders. They showed that the dominating wear mechanism involved for the nano-composites was intergranular fracture and grain pull-out; whereas for the micro composites, plastic deformation was observed due to the formation of a surface reaction layer.

The present work is intended towards the substantial betterment of different tribo-mechanical properties like fracture toughness,

<sup>1</sup>Corresponding author.

Contributed by the Tribology Division of ASME for publication in the *JOURNAL OF TRIBOLOGY*. Manuscript received July 26, 2021; final manuscript received November 18, 2021; published online December 8, 2021. Assoc. Editor: Neelganga Dasgupta.



Artificial Intelligence in Brain Informatics

## MRI-based brain tumour image detection using CNN based deep learning method

Arkapravo Chattopadhyay<sup>\*</sup>, Mausumi Maitra

Department of Information Technology, Government College of Engineering and Ceramic Technology, Kolkata-700010, West Bengal, India

### ARTICLE INFO

#### Article history:

Received 25 November 2021

Received in revised form 10 February 2022

Accepted 21 February 2022

### ABSTRACT

**Introduction:** In modern days, checking the huge number of MRI (magnetic resonance imaging) images and finding a brain tumour manually by a human is a very tedious and inaccurate task. It can affect the proper medical treatment of the patient. Again, it can be a hugely time-consuming task as it involves a huge number of image datasets. There is a good similarity between normal tissue and brain tumour cells in appearance, so segmentation of tumour regions become a difficult task to do. So there is an essentiality for a highly accurate automatic tumour detection method.

**Method:** In this paper, we proposed an algorithm to segment brain tumours from 2D Magnetic Resonance brain images (MRI) by a convolutional neural network which is followed by traditional classifiers and deep learning methods. We have taken various MRI images with diverse Tumour sizes, location, shapes, and different image intensities to train the model well. Furthermore, we have applied SVM classifier and other activation algorithms (softmax, RMSProp, sigmoid, etc) to cross-check our work. We implement our proposed method using "TensorFlow" and "Keras" in "Python" as it is an efficient programming language to perform fast work.

**Result:** In our work, CNN gained an accuracy of 99.74%, which is better than the state of the result obtained so far.

**Conclusion:** Our CNN based model will help the doctors to detect brain tumours in MRI images accurately, so that the speed in treatment will increase a lot.

© 2022 The Author(s). Published by Elsevier Masson SAS. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).



## Solving Travelling Salesman Problem using Artificial Immune System Optimization (AISO)

Ranjit Kr Mandal<sup>1</sup>, Pinaki Mukherjee<sup>2</sup>, and Mousumi Maitra<sup>3</sup>

<sup>1</sup>Dept. of Computer Sc. & Engineering, Govt. College of Engineering & Ceramic Technology, Kolkata, India, ranjitgocet@gmail.com

<sup>2</sup>Dept. of ECE, Govt. College of Engineering & Ceramic Technology, Kolkata, India, pinakimukherjee@gocet.ac.in

<sup>3</sup>Dept of IT, Govt. College of Engineering & Ceramic Technology, Kolkata, India, mous1232005@yahoo.com

**Abstract:** Travelling Salesman Problem (TSP) is a typical NP complete combinatorial optimization problem with various applications. In this paper, a nature inspired meta-heuristic optimization algorithm named as Artificial Immune System Optimization (AISO) algorithm is proposed for solving TSP. There are other approaches for solving this problem, namely Greedy Method, Branch and Bound (B&B), and Dynamic Programming (DP) but they are not very efficient. The time complexity of Greedy approach is  $O(n^2)$ . However, the Greedy method doesn't always converge to an optimum solution whereas the B&B increases search space exponentially and DP finds out optimal solution in  $O(n!)$  time. The population based meta-heuristic optimization algorithms such as Artificial Immune System Optimization (AISO) and Genetic Algorithm (GA) provide a way to find solution of the TSP in lesser time complexity. The proposed algorithm finds out the best cell (optimum solution) using a Survivor Selection (SS) operator which reduces the search space to ensure that effective information is not lost. Dataset, results and convergence graphs are presented and accuracy of the analysis is briefly discussed.

**Index Terms:** Artificial Immune System Optimization (AISO), Dynamic programming (DP), Genetic Algorithm (GA), SS Operator, Travelling Salesman Problem (TSP).

### 1. INTRODUCTION

The Travelling Salesman Problem (TSP) is a well known typical NP complete combinatorial optimization problem to find the minimum distance tour of a salesman who starts from his home city  $C$  and covers all  $n$  cities exactly once and coming back to his home city  $C$ ; (Schrjver,1960). TSP has numerous applications in computer wiring, vehicle routing (Leraza & Rinnooy,1975), drilling problem of printed circuit boards (PCBs) (Grötschel et al., 1991), overhauling gas turbine engines (Piane et al., 1987) and X-Ray crystallography (Bland & Shalices, 1989). TSPs are classified into symmetric TSP,

asymmetric TSP, and multi TSP (Rajesh et al., 2010). Different approaches have been proposed to solve TSP, which can be classified into two categories: deterministic algorithms and meta-heuristic algorithms.

Deterministic algorithms do not involve any randomness in the model. But it is a rigorous procedure. Greedy method (Sic. Mustan et al., 2019), Branch and bound algorithm (B&B) (Saad et al., 2013) and dynamic programming (R. Bellman, 1966), (V. B. Lobo et al., 1916) are the typical deterministic algorithms for solving TSP. Deterministic algorithms perform well on the TSP of small number of city tour. However, with the increase of the number of cities, greedy method does not produce optimal solution and the search space increases exponentially for B&B. The performance of deterministic algorithms degrade significantly. So, deterministic algorithms are not suitable for optimizing the TSP of large number of city tour.

Meta-heuristic optimization algorithm is a kind of stochastic algorithm which can accelerate the optimization process and find solutions in reasonable time but not guaranteeing to find the optimal solution.

Genetic Algorithm (GA) (J. McCall, 2005) and Ant Colony Optimization (ACO) (Dorigo & Gambardella, 1996; Dorigo & Gambardella, 1997) are some of the population based Meta-heuristic optimization algorithms which are successfully applied for solving TSP.

Artificial Immune System (AIS) is a population based meta-heuristic optimization algorithm which is inspired by structure, functions, models and information processing mechanism of biological immune system. Artificial Immune Systems and their applications are introduced by D. Dasgupta (Dasgupta, 1999).

<sup>\*</sup> Corresponding Author

ACMTransaction\_Paramita.JPG Open with ZP Extractor

## A Survey on the Role of Centrality as Seed Nodes for Information Propagation in Large Scale Network

Authors: Paramita Dey, Subhayan Bhattacharyya, Srikanti Roy [Authors info & claims](#)

ACM/IMS Transactions on Data Science, Volume 2, Issue 3 • Article No. 124, pp 1–25 • <https://doi.org/10.1145/3465334>

Published: 20 August 2021 [Publication History](#) Check for updates

2 518 View all Formats PDF

### Abstract

From the popular concept of six-degree separation, social networks are generally analyzed in the perspective of small world networks where centrality of nodes play a pivotal role in information propagation. However, working with a large dataset of a scale-free network (which follows power law) may be different due to the nature of the social graph. Moreover, the derivation of centrality may be difficult due to the computational complexity of identifying centrality measures. This study

SNComputerScienceSpringer\_paramita.JPG Open with ZIP Extractor

## Discovering Tampered Image in Social Media Using ELA and Deep Learning

[Sunen Chakraborty](#), [Kingshuk Chatterjee](#) & [Paramita Dey](#)

*SN Computer Science* **3**, Article number: 392 (2022) | [Cite this article](#)

65 Accesses | 1 Altmetric | [Metrics](#)

### Abstract

In the era of social media, we have access to millions of images. Nowadays with the rise of many advanced photo editing software finding a tampered image online is a very common situation. Most of the time an image is tampered for fun, but there are scenarios where an image is tampered with malicious intent and can cause harm to society. Digital image forensics is having a tough time dealing with tampered images due to the advancement of technology. Here, in our approach, we combined error level analysis (ELA) with a convolutional neural network (CNN) to classify whether an image is authentic or not. Our experiment has yielded a validation accuracy of 96.18% after 24 epochs.

URGENTLY REQUIRED FIRST AID x (2) WIPRO VV LISTING x +

http://mal.google.com/malicious/Powercat/malware/about/typical.com/180g/0w0W0C0u0g/0u0a0e0p0...

**International Journal of Electrical Engineering and Technology (IJEET)**  
Volume 12, Issue 9, September 2021, pp. 9-19, Article ID: IJEET\_12\_09\_002  
Available online at <https://iaeme.com/Home/homePageIJEET?Volume=12&Issue=9>  
ISSN Print: 0976-6545 and ISSN Online: 0976-6553  
DOI: <https://doi.org/10.34218/IJEET.12.9.2021.002>

© IAEME Publication Scopus Indexed

---

## DESIGN AND IMPLEMENTATION OF FIR LOW PASS FILTER - A CASE STUDY ON THE EFFECTS OF INITIAL COEFFICIENT VALUE TO ACHIEVE THE DESIRED FILTER OUTPUT

**Bimal Pal**  
Department of Computer Science and Engineering,  
Government College of Engineering and Ceramic Technology, Kolkata,  
West Bengal, India

**ABSTRACT**  
*The usage of filter is inevitable in most of the electronic devices to reject all unwanted high frequencies of electrical signal & pass the desired signal and for this purpose a precision filter is to be used in the input stage of the device. In an R-C Low Pass Filter capacitive reactance varies with the applied frequency of the input signal. When the applied frequency of the input signal increases the capacitive reactance is decreased and high frequency signal is bypassed to the ground through the capacitor. But in the case of FIR Low Pass Filter, the unwanted high frequency signal is*

Activate Windows  
Go to Settings to activate Windows.

Type here to search 29°C Mostly cloudy 19:46 23-09-2021

Journal and Conference Paper - X | (33) [18+] | विज्ञान | खोज | 2021-2022 (1) Journal Paper - X | 2021-2022 (2) Journal Paper - X | 2021-2022 (3) Journal Paper - X

File | C:\Users\UNIQUE\AppData\Local\Temp\Temp1\_Journal%20Papers%202020-2021%20and%2032021-2022.zip\2021-2022... | 1 of 1

MSDE

ROYAL SOCIETY OF CHEMISTRY

PAPER

Check for updates

Dist. by: *Mol. Syst. Des.* 2022, 1, 67

### Unveiling the role of structure–property correlation and its validation towards engineering the application potential of sol–gel derived mesoporous gamma-alumina†


Savan Kumar Sharma, Paromita Das, and Barun K. Santal

In the present study, a comprehensive investigation has been carried out on the meticulously designed surfactant-free glycerol-activated sol-gel derived mesoporous  $\gamma$ -alumina powder, specifically with the aim to establish the excellent prospect of the structure–property relationship towards efficiently modifying and conceptually enhancing the correlative outlook of the application perspective. Herein, the systematic engineering of the selective synthetic parameters such as peptizing acid type and its associated solvent exerts great strategic influence towards methodically tuning and judiciously constructing the prime controlling facet of the overall process, which successively maintains the distinctive individuality of the sol-gel derived mesoporous gamma-alumina structure. Interestingly, the initiation of discrepancy, which was recorded at the chemical nature site of the molecular-level structure of two distinctive boehmite salt, conspicuously maintains their individuality even while experiencing the sequential advancement of the dehydroxylation process, the consequential rearrangement of the hydroxyl group, alongside the concurrent progressive diffusion of  $K^+$  ion amongst the available co-ordination sites as a function of increasing temperature. Eventually, while dictating the individual identity of the evolved gamma-alumina structure, the study aimed at acquiring identical distinctive characteristics seen at their corresponding atomic-scale bulk structure and surface textural features in terms of revealing the  $^1H$ ,  $^{27}Al$  NMR,  $^13C$  and  $^19F$  XPS, BET, TGA, and ICP spectral analysis with the optimization of comparatively higher crystallinity, greater  $AlO_3/Al_2O_3$  ratio, lower Lewis and Brønsted acid sites, lesser amount of hydroxyl groups, and lower extent of agglomeration tendency in inorganic acid peptized gamma-alumina as compared to organic acid peptized

Activate Windows  
Go to Settings to activate Windows

Type here to search | 29°C Mostly cloudy | 21:08 | 25-06-2022



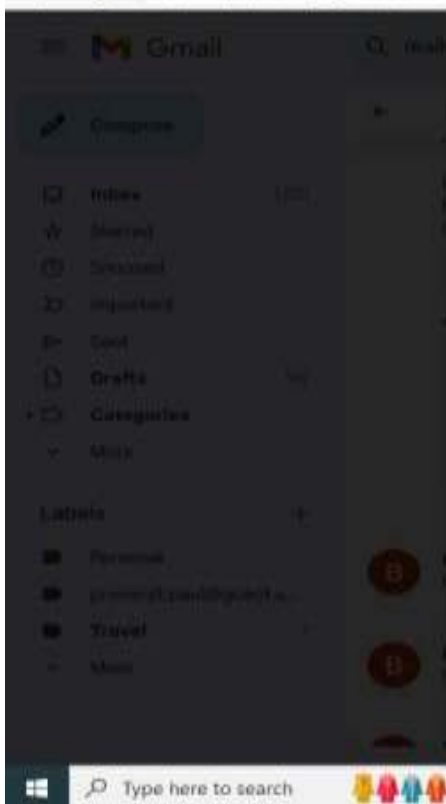

Gmail sidebar navigation menu including: Compose, Inbox (1/1), Starred, Sent, Drafts (1/1), Categories, Labels, Personal, Travel, and More.

**International Journal of Electrical Engineering and Technology (IJEET)**

Volume 12, Issue 11, November 2021, pp. 1-18, Article ID: IJEET\_12\_11\_001  
Available online at <https://www.iaeme.com/Home/issue/IJEET?Volume=12&Issue=11>  
ISSN Print: 0976-6545 and ISSN Online: 0976-6553  
DOI: <https://doi.org/10.34218/IJEET.12.11.2021.001>

© IAEME Publication  Scopus Indexed

## EVOLUTION OF POWER SUPPLY AND ITS APPLICATION TO ELECTRICAL AND ELECTRONIC DEVICES: AN ANALYSIS

**Himal Pat**

Department of Computer Science and Engineering, Govt. College of Engineering and Ceramic Technology, 73, Abinash Chandra Banerjee Lane, Kolkata, India

### ABSTRACT

*Electricity can be produced using chemical effect where the movement of ions constitutes a flow of current through the electrolyte. Electrochemical cells are used as storage cells where chemical energy can be converted into electrical energy. The most efficient and widely used method for the generation of electricity is based on the laws of Electromagnetic Induction. According to this law electromotive force is induced in a conductor whenever the conductor cuts across magnetic lines of flux. The invention of the Diode Valve in 1904 and the invention of the triode valve in 1906 and their large-scale production from 1920 onwards helped to manufacture electronic products and instruments. The invention of the galena-based Cat's whisker detector in 1906 was the milestone of manufacturing crystal radio receivers. Cuprous oxide rectifier was invented in 1926 and was used for the rectification of power supply frequencies. Selenium rectifier was invented in 1933 and it was also used for the rectification of power frequencies but selenium rectifier was more efficient and was best in low-voltage, heavy current applications. Commercial manufacturing of germanium crystal diode was started in 1946. Then invention of the bipolar junction transistor in 1948 had replaced the valves because of low power, low cost, small size and long-lasting. Electrical products are generally operated from the mains power supply. But electronic products are operated by D.C supply and nowadays most of the communication devices are designed to be operated by the low-watt power supply. Scientists and researchers are developing low power, low heat dissipation, low dropout, miniature and energy*



Google Drive sidebar navigation menu with icons for Home, My Drive, Shared with me, Shared with others, Recent, Starred, Folders, and Trash.



## Skyrme fluid in anisotropic Universe

RIKPRATIK SENGUPTA<sup>1</sup>, B C PAUL<sup>2</sup>✉\* and PRASENJIT PAUL<sup>3</sup>

<sup>1</sup>Department of Physics, Aliah University, Kolkata 700 160, India

<sup>2</sup>Department of Physics, University of North Bengal, Siliguri 734 013, India

<sup>3</sup>Department of Physics, Government College of Engineering and Ceramic Technology, Kolkata 700 010, India

\*Corresponding author. E-mail: bcpaul@associates.iacaa.in

MS received 6 November 2021; revised 6 February 2022; accepted 7 February 2022

**Abstract.** Cosmological solutions are obtained in anisotropic Kantowski–Sachs (KS) and Bianchi Type-I Universes considering a cosmological constant with Skyrme fluid. Interestingly, the solutions obtained here in both the KS and Bianchi-I anisotropic Universes are found to isotropise at late time due to the presence of the Skyrme fluid, even in the absence of  $\Lambda$  term or any inflationary mechanism involving the inflaton field. A comparative study of both the anisotropic cosmological models are carried out here and it is found that the Bianchi-I Universe admits oscillatory solutions for a given matter configuration. We also note that the emergent Universe model can be obtained with the Skyrme fluid. The anisotropy, deceleration and jerk parameters have been studied along with the linear perturbative stability to explore the efficacy of the models. Both cosmological models are stable in the absence of cosmological constant. Besides, their predictions are compatible with the observational data. Thus, we may claim that Skyrme fluid is a possible source of isotropization of an anisotropic Universe via accelerated expansion, which is capable of reproducing some features that can be observed in the Universe.

**Keywords.** Kantowski–Sachs; Bianchi-I; Skyrme fluid.

PACS No. 98.80.-k

← Modified Chaplygin Gas.pdf

←

→

Downloaded from www.worldscientific.com on 01/21. Re-use and distribution is strictly not permitted, except for Open Access articles.

International Journal of Modern Physics  
 (2021) 28(08):1-16 (16 pages)  
 © World Scientific Publishing Company  
 DOI: 10.1142/S0218271821500930



### Modified Chaplygin gas in anisotropic universes on the brane

Saibal Ray<sup>\*,1</sup>, Praemjit Paul<sup>†,1</sup>, Rikpratik Sengupta<sup>\*,2</sup>,  
 Neeraj Pant<sup>1,1</sup> and Riya Nag<sup>\*,\*\*</sup>

<sup>\*</sup>Department of Physics,  
 Government College of Engineering and Ceramic Technology,  
 Kolkata 700 010, West Bengal, India

<sup>†</sup>Department of Mathematics,  
 National Defence Academy, Khadakvasla, Pune, India

<sup>1</sup>saibal@associates.incoo.in  
<sup>1</sup>praemjit07108@gmail.com  
<sup>\*</sup>rikpratik.sengupta@gmail.com  
<sup>1</sup>neeraj.pant@yashn.com  
<sup>\*\*</sup>riyanag@gmail.com

Received 6 December 2020  
 Revised 21 February 2021  
 Accepted 29 June 2021  
 Published 4 August 2021

In this paper, we study the effect of Modified Chaplygin gas (MCG) in the context of Bianchi type I universe. The cosmological solutions for Kantowski-Sachs universe with MCG are obtained on the brane world. The solutions are found to be dependent on MCG parameter but

# Innovative Approach to Evaluate the Wearing of Nano-TiO<sub>2</sub>-Doped Alumina Ceramics in the Light of Image Modeling

## Partha Haldar

Department of Mechanical Engineering,  
Government College of Engineering and Ceramic  
Technology,  
Kolkata 700010, India  
e-mail: parthahaldar@gcect.ac.in

## Abk Mukherjee

Department of Electrical Engineering,  
Government College of Engineering and Ceramic  
Technology,  
Kolkata 700010, India  
e-mail: abk@gcect.ac.in

## Tapas Kumar Bhattacharya<sup>1</sup>

Department of Ceramic Technology,  
Government College of Engineering and Ceramic  
Technology,  
Kolkata 700010, India  
e-mail: tapaskbhattacharya@gcect.ac.in

## Nipu Modak<sup>1</sup>

Department of Mechanical Engineering,  
Jadavpur University,  
Kolkata 700032, India  
e-mail: nipu.modak@jadavpuruniversity.in

*The present research is emphasized on the microscopic observation of post-wear surface of nano-TiO<sub>2</sub>-doped alumina ceramics to assess wearing by promising image processing algorithms, namely, entropy analysis, Sobel edge detection technique, and entropy filtered image histogram analysis in relation to the extent of doping. The experimental results of specific wear-rate showed an indicator with the extent of microfracturing of grains, plowing of materials and debris formation on the wear track after a long wear cycle in terms of entropy level, edge density index, and entropy filtered image, and the nature of histogram at different doping levels. The lowest value of entropy level and edge density index is shown at the level of 1 wt% TiO<sub>2</sub>-doped alumina ceramics due to the presence of low number of granularity and microfracture grains on the wear track cause the lowering of specific wear-rate. The histogram of entropy filtered image for 1 wt% doping is more uniformly distributed with the highest frequency and lowest skewness factor over a wide range of intensity values.*  
[DOI: 10.1115/1.4051904]

**Keywords:** dry friction, wear, alumina-titanium ceramics, image processing, edge detection, entropy analysis

<sup>1</sup>Corresponding authors.  
Contributed by the Tribology Division of ASME for publication in the *JOURNAL OF TRIBOLOGY*. Manuscript received June 3, 2021; final manuscript received July 21, 2021; published online August 11, 2021. Assoc. Editor: Nourouq Ozshams.

## 1 Introduction

Wear is an important tribo-mechanical property of materials related to the progressive loss of material from the solid surface by mechanical interaction of two sliding surfaces under load [1]. Therefore, knowledge of wear-rate is of technical importance for assessing the life of the materials. Wear can quantitatively be measured by a mass loss method, dimensional change method, volume loss method in relation to testing parameter, contact geometries and environmental condition, etc. [2]. The incorporation of nano-additives in alumina ceramics improved wear resistance by modifying microstructure, inhibiting abnormal grain growth, and controlling the volume fraction and size distribution of nano-particles in reinforcing matrix [3]. The importance of alumina lies heavily in bio-ceramic owing to its properties like excellent corrosion resistance, good biocompatibility, low friction, high wear resistance, and high strength [4], which are indispensable properties for prosthesis technology. It is further observed that the addition of titania as a sintering aid in alumina sample improves the tribo-mechanical properties of the ceramic [5-7].

The present research scenario in material science and engineering are inclined towards interdisciplinary areas by adopting soft computing to explain the properties of engineering materials more accurately. Therefore, emerging research work should be framed to understand the properties of engineering materials more accurately by applying the algorithm of soft computing in an automated manner [8,9]. The scanning electron microscopic (SEM) image is a digital domain of two-dimensional (2D) intensity map. Each pixel of SEM image corresponds to the captured signal intensity at every point. Prolong action of mechanical stress on the surface of the specimen results in microfracturing, axial crack formation, and plowing of materials and debris formation. The morphological features of the worn-out surface are to accumulate the induced signals, and image processing techniques have been implemented to judge the specific wear-rate using different deterministic parameters of the image analysis methods [10]. Application of various image processing methods is found widely in the literature in various fields like remote sensing [11], medical field [12], encoding system [13], machine vision [14], color processing [15], pattern recognition [16], etc. Alturki et al. [17] measured the cavitation erosion on stainless steel surface by 2D discrete wavelet packet transform in terms of mean depth penetration (MDP). The result showed that MDP values were inversely proportional with corrosion in contact with the oil-water emulsion. The application of image processing techniques is in use in cutting tool wear prediction for a long time. Juskovic et al. [18] have developed a flexible system that can measure tool wear with high spatial resolution and good accuracy. They have performed the digitization of the image followed by image analysis and finally evaluated a set of tool wear parameters. They used a vision system to measure tool wear using a charge-coupled device camera and laser diode with a linear projector. Wang et al. [19] measured flank wear in milling by analyzing successive images captured by a high-speed camera in a periodic manner without stopping the spindle. The successive operation-like edge detection by applying Sobel operator, edge enhancement, thresholding, edge line extraction, and morphological operation is used to obtain reference line of the image. Loizou et al. [20] developed an algorithm to monitor tool wear for a linear broaching based on the overall wear area. They automated the method with image cropping and digital image processing tools to determine the affected area without requiring any manual intervention. Thakre et al. [21] also developed an automatic calibrated system to monitor flank wear of carbide tool insert by a machine vision system by monitoring wear related parameters like average tool wear width, tool wear area, tool wear perimeter, etc. The vision system result of average tool wear lies within 3% error range with respect to the experimental results. Kent et al. [22] also monitored tool wear of modern computer numerical control machine in real-time and established a good correlation with the expected wear characteristics. They showed that the extent of



## Application of Poincaré analogous time-split signal-based statistical correlation for transmission line fault classification

Alok Mukherjee<sup>1</sup> · Kingshuk Chatterjee<sup>2</sup> · Palash Kumar Kundu<sup>3</sup> · Arabinda Das<sup>2</sup>

Received: 9 February 2021 / Accepted: 22 July 2021  
© The Author(s), under exclusive license to Springer-Verlag GmbH Germany, part of Springer Nature 2021

### Abstract

A transmission line fault classification scheme is proposed in this article using Poincaré-based correlation analysis of three-phase fault currents. The method segments each fault signal into two equal time-split components and computes correlation coefficient between these two time-split signals. The fault current signals of the directly affected line(s) observe an abrupt monotonic rise, compared to the indirectly affected phases. This sudden rise in magnitude is expressed with correlation coefficients between the two almost consecutive time-split components of signal, time shifted by delay index. This method emphasizes this monotonic nature of increment of the fault current, enabling prompt fault detection. Further analysis of three phases of fault signals independently yields a set of correlation coefficients for ten different fault prototypes, which are used to develop fault classifier signatures for direct classification. The proposed method yields high classification accuracy of 99.76% using only 1/6th of the post-fault noisy signal with fault resistance varying from 0.01 to 100Ω. Besides, analysis of only one end single discards the requirement of time synchronous signal acquisition from both ends. Finally, use of simple analysis reduces the computational burden compared to several contemporary methods.

**Keywords** Poincaré analysis · Time-split signal · Correlation coefficient · Fault intensity level · Fault classification · Delay index

### 1 Introduction

people and better protection of connected equipments from severe damage. This also helps to maintain system stability

## Bilingualism as a protective factor in aphasia

Alfredo Ardila<sup>a,b,c</sup>, Durjoy Lahiri<sup>c</sup>, and Alok Mukherjee<sup>d</sup>

<sup>a</sup>Institute of Linguistics and Intercultural Communication, First Moscow State Medical University, Moscow, Russia; <sup>b</sup>Psychology Doctoral Program, Albizu University, Miami, FL, USA; <sup>c</sup>Bangur Institute of Neurosciences, IPGMER and SSKM Hospital, Kolkata, India; <sup>d</sup>Electrical Engineering, Government College of Engineering and Ceramic Technology, Kolkata, India

### ABSTRACT

**Background:** Bilingualism may affect the profile of cognitive disturbances associated with stroke. Its impact on aphasia severity, however, is in need of substantiation.

**Aims:** To determine the relationship between bilingualism and vascular aphasia severity.

**Methods:** This is an observational cross-sectional study conducted on people with post-stroke aphasia. Our sample included 155 monolingual and 53 bilingual vascular aphasia patients. They were selected in a neurological hospital in Kolkata (West Bengal, India).

**Results:** The Bengali version of Western Aphasia Battery (BWAB) was used in this study. Aphasia severity was compared between monolingual and bilingual participants. The overall difference in the mean aphasia quotient (AQ) between bilingual and monolingual participants was statistically significant ( $p = 0.009$ ). It was also found that in bilingual participants, aphasia was less severe in certain subgroups, namely: higher lesion volume, male gender, and sub-cortical stroke, while in none of the subgroups a monolingual advantage was documented.

**Conclusion:** Current results suggest that bilingualism represents a protective factor in vascular aphasia; this effect is observed particularly in some aphasia subgroups.

### KEYWORDS

Aphasia; bilingualism; stroke

### Introduction

Studies supporting the idea of bilingual advantage have gained significant scientific ground over the last decade or so. The idea of bilingualism being a protective factor in post-stroke aphasia stems from the observations that bilin-

perspective of post-stroke cognitive difficulties as well as outcome in bilingual individuals. Alladi et al. (2016) studied 608 patients suffering ischemic strokes and analyzed the significance of bilingualism on post-stroke cognitive disturbances. The authors reported that no significant differences in aphasia frequency were found: 11.8% of monolingual stroke-

## Indoor Cardiovascular Health Monitoring System under COVID 19 Situations

Alok Mukherjee<sup>1</sup>, Deboleena Sathukhan<sup>2</sup>, Kingshuk Chatterjee<sup>3</sup>, Tanmay Sarkar<sup>4</sup> 

<sup>1</sup> Government College of Engineering and Ceramic Technology, Kolkata

<sup>2</sup> Applied Mechanics Department, IIT Madras, India

<sup>3</sup> Malda Polytechnic, West Bengal State Council of Technical Education, Government of West Bengal, Malda, India

\* Correspondence: [tanmays408@gmail.com](mailto:tanmays408@gmail.com) (T.S.)

Scopus Author ID: 57203373796

Received: 20.06.2021; Revised: 25.07.2021; Accepted: 29.07.2021; Published: 9.08.2021

**Abstract:** In this article, we propose a health monitoring system, especially focused on detecting myocardial infarction chances and raising the alarm when required. The device would be able to identify malfunctioning of the heart using the ECG signals taken using ARDUINO-based portable and affordable sensors. Here, we have described the development of two major schemes of health monitoring. We have developed a method of identifying the maloperation of the heart by using the second lead of the ECG signal. This method is based on a modified Poincaré analysis, which effectively distinguishes the diseased heart ECG from the normal heart ECG signals. The Poincaré-based scheme is tested using five different diseased ECG signals from the PTB database, and a high disease identification efficiency of 82% is achieved. Here we further propose implementing this analysis within the ARDUINO-based health monitoring board so that patients would get an opportunity to monitor their heart condition at some regular intervals staying at home and follow up with a physician if any abnormality is detected. This entire scheme is more useful, especially under this COVID 19, pandemic situation when moving outside the home is a challenge in itself. Hence, the proposed device would be



ORIGINAL CONTRIBUTION

## Supervised Learning Aided Multiple Feature Analysis for Freshness Class Detection of Indian Gooseberry (*Phyllanthus emblica*)

Tanmay Sarkar<sup>1</sup> · Alok Mukherjee<sup>2</sup> · Kingshuk Chatterjee<sup>2</sup>

Received: 15 May 2021 / Accepted: 22 September 2021  
© The Institution of Engineers (India) 2021

**Abstract** A supervised learning-based simple three class freshness detection algorithm is presented in this paper for prediction of freshness of Amla samples. Six major features from the red-green-blue (RGB) and hue-saturation-vital component (HSV) colourspace and ten other minor features have been studied here with the proposed artificial neural network (ANN) model. The proposed freshness classifier is computationally light due to the use of only ANN as the major classifying tool. More importantly, the analysis is based on images captured on smart phone only, which enables portability and hence, wide acceptability of the scheme. Accuracy of classification is 98.5% achieved using the hue histogram of the image, the hue histogram by green layer histogram and others. All the major features

**Keywords** Major and minor feature · Feature extraction · Freshness class · Artificial neural network (ANN) · Accuracy of classification

### Introduction

An intense relationship can be established between food quality and customer satisfaction. Customers always play a key role while determining the food quality. Customer satisfaction about each quality attribute of a product contributes to the overall quality, in order to make assurance about the product quality and also to safeguard the scaled market quality maintenance is now extremely

Page 19 / 34



ORIGINAL ARTICLE

## Freshness Assessment of Indian Gooseberry (*Phyllanthus emblica*) Using Probabilistic Neural Network

Alok Mukherjee<sup>1</sup> · Tanmay Sarkar<sup>2</sup>  · Kingshuk Chatterjee<sup>1</sup>

Received: 24 May 2021 / Revised: 23 September 2021 / Accepted: 27 September 2021  
© The Korean Society for Agricultural Machinery 2021

### Abstract

**Purpose** In this paper, a probabilistic neural network (PNN)-based simple model for the detection of freshness in Indian gooseberry or amla (*Phyllanthus emblica*) samples has been developed.

**Methods** The amla images have been analyzed using two features: hue histogram, which is a kind of color representative of the image, and entropy analysis, which corresponds to texture analysis of the sample images. Three freshness classes have been assigned depending on the freshness of the samples and governed by the Hedonic scale.

**Results** The proposed PNN model is also tested with five different activation functions; out of which, radial and triangular basis functions are found to yield the most accurate results. Moreover, the hue-PNN model is found to possess marginal superiority over the entropy-PNN model, thus signifying the higher effectiveness of the former in the proposed work. The proposed work is computationally lighter as it contains PNN as the single analysis tool, aided by the image histograms. Moreover, the experiments have been conducted with the images captured using smartphones only, which establishes the portability of capturing images.

**Conclusions** High freshness classification accuracy of 97.5%, ease of implementation, and use of smartphone captured images widen its practical applicability of developing into a smartphone application-based module.

**Keywords** Amla · Freshness classification · Hue histogram · Entropy image histogram · Probabilistic neural network (PNN) · Activation function



Food Analytical Methods  
<https://doi.org/10.1007/s12161-021-02161-7>



## Comparative Analysis of Statistical and Supervised Learning Models for Freshness Assessment of Oyster Mushrooms

Tanmay Sarkar<sup>1</sup> · Alok Mukherjee<sup>2</sup> · Kingshuk Chatterjee<sup>2</sup> · Mohammad Ali Shariati<sup>3,4</sup> · Maksim Rebezov<sup>3,4,5</sup> · Svetlana Rodionova<sup>3</sup> · Denis Smirnov<sup>3</sup> · Ruben Dominguez<sup>6</sup> · Jose M. Lorenzo<sup>6,7</sup>

Received: 18 October 2021 / Accepted: 26 October 2021  
© The Author(s), under exclusive licence to Springer Science+Business Media, LLC, part of Springer Nature 2021

### Abstract

Automatic assessment of the quality of fruits and vegetables is a growing field of research in this modern era in order to enable faster processing of good quality foods. In this work, we have analyzed ten major colour variant features of two sets of oyster mushrooms in terms of histograms of each layer of the red–green–blue colourmap, hue–saturation–vital component colourmap, luminance–chrominance colourmap and the greyscale image. Besides, texture analysis has been carried out using entropy window filtering. Apart from that, five other minor features, such as mean, standard deviation, entropy, kurtosis and skewness of each of these layers, and four other greyscale features, such as contrast, correlation, energy and homogeneity are analyzed in this work. Two different freshness assessment models employing statistical methods like principal component analysis (PCA) and supervised learning algorithms such as artificial neural network (ANN) have been used here to investigate the different features of the mushroom images and classify the same into fresh and deteriorated classes. Analysis revealed that the ANN classifier outperforms the PCA threshold classifier with almost all the features. The highest classifier accuracy is obtained as 94.4% using the ANN model and 93.3% using the PCA threshold freshness detector. Most importantly, the use of smartphones ensures portability, as well as the possibility of widespread application of the proposed models.

**Keywords** Oyster mushroom · Major and minor feature · Freshness class · Artificial neural network (ANN) · Food safety

### Introduction

carbohydrate (45–48%), fibre (11–13%), vitamins and essential amino acids (Dibaha and Aben 2017; Li et al. 2021)



Food Analytical Methods  
<https://doi.org/10.1007/s12161-021-02286-x>



## Edge Detection Aided Geometrical Shape Analysis of Indian Gooseberry (*Phyllanthus emblica*) for Freshness Classification

Tanmay Sarkar<sup>1</sup> · Alok Mukherjee<sup>2</sup> · Kingshuk Chatterjee<sup>3</sup> · Vladimir Ermolaev<sup>3</sup> · Dmitry Piotrovsky<sup>4</sup> · Kristina Vlasova<sup>4</sup> · Mohammad Ali Shariati<sup>4</sup> · Paulo E. S. Munekata<sup>5</sup> · Jose M. Lorenzo<sup>5,6</sup>

Received: 26 November 2021 / Accepted: 7 December 2021  
© The Author(s), under exclusive licence to Springer Science+Business Media, LLC, part of Springer Nature 2021

### Abstract

This paper presents a freshness classification model for determining the quality of amla (*Phyllanthus emblica*) using features extracted from the progressively deteriorating shapes. Estimation of the peripheral distance from the centroid is carried out to develop key features regarding the shape of the samples, followed by developing two classifier models using support vector machine (SVM) and artificial neural network (ANN) to segment the samples into *Good* and *Deteriorated* classes. The proposed algorithm is simple in analysis as it includes geometry-based computation for identifying the surface irregularities and shape changes occurring due to aging the samples. Canny edge detection model is used to obtain the peripheral edges, followed by analyzing the same using "ConvexImage." High accuracy of classification, exceeding 90%, is achieved in most cases, using three different feature parameters so developed, either as univariate or multivariate schemes of analysis. Besides, the sample images are captured using smartphones only. Thus, high accuracy of freshness classification, along with ease of analysis and image capturing using the phone camera itself, makes the algorithm suitable for implementing in low memory devices such as smartphones, which would also make the proposed model more widely exploring.

**Keywords** Amla · Food safety · Quality control · Canny edge detection

Tanmay Sarkar and Alok Mukherjee contributed equally

### Introduction





ORIGINAL CONTRIBUTION

# Artificial Neural Network based Dimension Prediction of Rectangular Microstrip Antenna

Pinaki Mukherjee<sup>1</sup> · Alok Mukherjee<sup>1</sup> · Kingshuk Chatterjee<sup>1</sup>

Received: 18 October 2020 / Accepted: 24 December 2021  
© The Institution of Engineers (India) 2022

**Abstract** A computational method for the prediction of dimensions of a microstrip antenna has been proposed in this work. The model uses artificial neural network (ANN) as the chief designing tool for the development of the predictor model. The ANN structure has been designed to take three major output parameters as input, viz. resonant frequency, fractional bandwidth and return loss. The outputs of the model are assigned as the three major design parameters of the antenna model: length, width and position of feed point. Equal number of input and output parameters of the model enhances the importance of the model. Backpropagation topology has been adopted while designing the ANN structure. Validation of the proposed ANN model is carried out by designing the prototype antenna models using the IE3D software. The proposed model yields an average

## Introduction

Microstrip patch antenna (MPA) is a popular name in the field of antenna technology, especially due to the numerous advantages, it offers like light weight, compact as well as flexible structure and design, etc. although it suffers from its major drawback of narrow bandwidth. Hence, microstrip and printed antennas have a wide range of applicability, especially in fields like Global Positioning System (GPS), Bluetooth automotive applications with RHCP, Satellite Digital Audio Radio Services (SDARS) and so on. Designing highly accurate antennas for a particular application in different fields is a great challenge for the engineers. These antennas are characterized by a large number of design parameters compared to the conventional microwave antennas, thus enhance the design compli-



# Current Research in Food Science

journal homepage: [www.elsevier.com/locate/jcrfs](http://www.elsevier.com/locate/jcrfs)



## Review Article

### Application of bio-inspired optimization algorithms in food processing

Tanmay Sarkar<sup>a,\*</sup>, Molla Salauddin<sup>b</sup>, Alok Mukherjee<sup>c</sup>, Mohammad Ali Shariati<sup>d</sup>, Maksim Rebezov<sup>e,f,g</sup>, Lyudmila Tretyak<sup>h</sup>, Mirian Pateiro<sup>i,j</sup>, José M. Lorenzo<sup>k,l</sup>

- <sup>a</sup> Department of Food Processing Technology, Malda Polytechnic, West Bengal State Council of Technical Education, Malda, 732102, West Bengal, India
- <sup>b</sup> Department of Food Processing Technology, Mir Madan Mohandal Gant, Polytechnic, West Bengal State Council of Technical Education, Nadia, 741136, West Bengal, India
- <sup>c</sup> Government College of Engineering and Ceramic Technology, Kolkata, India
- <sup>d</sup> Department of Scientific Research, E.G. Zarembov Moscow State University of Technology and Management (The New Moscow University), 109894, Moscow, Russian Federation
- <sup>e</sup> Biophysics Center, Professore General Physics Institute of the Russian Academy of Sciences, 119991, Moscow, Russian Federation
- <sup>f</sup> Department of Scientific Research, V. M. Golubev Federal Research Center for Food Systems, 109516, Moscow, Russian Federation
- <sup>g</sup> Department of Welding, Standardization and Certification, Orenburg State University, 460018, Orenburg, Russian Federation
- <sup>h</sup> Centro Tecnológico de La Carne de Galicia, Edif. Galicia N° 4, Parque Tecnológico de Galicia, San Cibrao das Viñas, 32900, Ourense, Spain
- <sup>i</sup> Universidad de Vigo, Área de Tecnología dos Alimentos, Facultade de Ciencias, 36004 Ourense, Spain

#### ARTICLE INFO

**Keywords:**  
Metaheuristic  
Food process optimization  
Nature-inspired algorithm  
Food industry

#### ABSTRACT

Bio-inspired optimization techniques (BOT) are part of intelligent computing techniques. There are several BOTs available and many new BOTs are evolving in this era of industrial revolution 4.0. Genetic algorithm, particle swarm optimization, artificial bee colony, and grey wolf optimization are the techniques explored by researchers in the field of food processing technology. Although, there are other potential methods that may efficiently solve the optimum related problems in food industries. In this review, the mathematical background of the techniques, their applications and the potential microbial-based optimization methods with higher precision has been surveyed for a complete and comprehensive understanding of BOTs along with their mechanism of functioning. These techniques can simulate the process efficiently and able to find the near-to-optimal value expeditiously.

Navigation sidebar with icons for Compose, Inbox, Sent, Drafts, and other email functions.

Food Analytical Methods  
<https://doi.org/10.1007/s12161-022-02241-2>



## Development of Artificial Vision System for Quality Assessment of Oyster Mushrooms

Alok Mukherjee<sup>1</sup> · Tanmay Sarkar<sup>2</sup> · Kingshuk Chatterjee<sup>1</sup> · Dibyajit Lahiri<sup>3</sup> · Moupriya Nag<sup>3</sup> · Maksim Rebezov<sup>4,5</sup> · Mohammad Ali Shariat<sup>6</sup> · Alevtin Miftakhutdinov<sup>7</sup> · Jose M. Lorenzo<sup>8,9</sup>

Received: 13 January 2022 / Accepted: 21 February 2022  
© The Author(s), under exclusive licence to Springer Science+Business Media, LLC, part of Springer Nature 2022

### Abstract

In this paper, we have illustrated a simple and effective method of assessing the fresh and deteriorated oyster mushroom samples. Analysis of correlation coefficients is done very effectively here to identify the interrelationship of different color layers of the RGB and HSV color map of the samples, as this degrades progressively. These correlation features are further analyzed using two supervised learning models incorporating support vector machine (SVM) and artificial neural network (ANN) to develop a simple classifier model to identify the two different classes of the mushroom images. The proposed work is simple as it includes a simple computational supervised model, and, more importantly, it is very effective as it explores the interrelation between the different layers of two different color maps of the image samples. The highest classifier accuracy achieved using ANN and SVM models exceeds 95% and 98% respectively; and the mean accuracy level from fifty such observations stands 94.7% and 93.4%, which are high considering contemporary researches. High accuracy of classification, simplicity of analysis and image acquisition through smartphones makes the proposed work suitable for implementing in application-based software for smartphone users which would further enhance the wide applicability of the proposed mushroom classifier scheme.

**Keywords** Mushroom · Freshness classification · Correlation coefficient · Food safety · Quality control



ORIGINAL CONTRIBUTION

## Correlation-Aided 3D Vector Distance Estimation-Based Quality Assessment of Indian Gooseberry

Tammy Sarkar<sup>1</sup> · Alok Mukherjee<sup>2</sup> · Kingshuk Chatterjee<sup>2</sup>

Received: 16 November 2021 / Accepted: 12 January 2022  
© The Institution of Engineers (India) 2022.

**Abstract** In this paper, it has been developed a statistics-based method for the quality assessment and classification of amla (Indian gooseberry). The proposed binary classification of the amla fruits has been achieved using a simple statistical analysis incorporating the correlation coefficient of the image features. Here, the sample images were captured and analysed for the red green blue (RGB) and hue saturation (HS) layers. We have developed the histograms of these layers were developed and investigated the correlation coefficient between each of the layers taken pairwise. These cross-correlation values have been studied extensively to identify three of the most important and significant pairs of features which produced distinctive correlation coefficient values between the good and the bad

**Keywords** Freshness class · Centroid · Food safety · Postharvest management

### Introduction

Indian gooseberry (*amla*) is well known for its diverse health benefits. For years, it has been consumed to boost up human health. It can act against diarrhoea, constipation, diabetes, asthma and heart diseases [1, 2]. The most important fact which makes *amla* nutritionally rich is the high content of vitamin C in it [1]. Owing to its antioxidant activity, regular use of *amla* in diet healthifies immune system as well as the digestive system and also fights



## Quality Assessment of Tindora (*Coccinia indica*) Using Poincare Plot and Cartesian Quadrant Analysis

Tanmay Sarkar<sup>1</sup> · Alok Mukherjee<sup>2</sup> · Kingshuk Chatterjee<sup>2</sup> · Saule Ospandiyarovna Akhmetova<sup>3</sup> · Aigul Surapovna Alipbekova<sup>4</sup> · Marina Temerbayeva<sup>5</sup> · Mohammad Ali Shariati<sup>6</sup> · Maksim Rebezov<sup>6,7</sup> · Jose Manuel Lorenzo<sup>8,9</sup>

Received: 28 March 2022 / Accepted: 3 April 2022  
© The Author(s), under exclusive licence to Springer Science+Business Media, LLC, part of Springer Nature 2022

### Abstract

Tindora or ivy gourd (*Coccinia indica*) is a tropical vegetable and has the potential to become popular worldwide due to its rich nutritional characteristics, adaptability to adverse environmental condition and fast fraining nature. The fresh samples are bright green (good) in colour; it turns yellow (intermediate quality) and ultimately turns bright red (bad or inedible as vegetable). In this paper, tindora is classified using two different colour representations of the image matrix, namely RGB and HSV. In the RGB representation, intensity of the green layer versus intensity of the red layer for each pixel position is plotted. The shape of the plot enables us to identify the tindora quality. In the case of HSV representation, the hue layer is used for classification purposes. The hue layer matrix is vectorized and the Poincare plot is computed. The distribution of the Poincare plot is analysed using Cartesian quadrant system. Based on the analysis, tindora quality is determined. The accuracy of the tindora classification using RGB representation is 68.67 and HSV representation is 94.33. The classifier used in both the representations after feature extraction is primarily threshold based and hence has low computational burden. The low computational burden makes the method ideal for incorporation into smartphones in the form of an app.

**Keywords** Vegetables · Food quality inspection · Artificial intelligence · Image analysis



**Lecturer Tanmay SARKAR, PhD**

E-mail: [tanmay@wbscte.ac.in](mailto:tanmay@wbscte.ac.in); [tanmays468@gmail.com](mailto:tanmays468@gmail.com)

Malda Polytechnic, West Bengal State Council of Technical Education  
Food Technology and Biochemical Engineering, Jadavpur University

**Assistant Professor Alok MUKHERJEE, PhD Student**

E-mail: [alok@gcect.ac.in](mailto:alok@gcect.ac.in), [alokmukherjee.ju@gmail.com](mailto:alokmukherjee.ju@gmail.com)

Government College of Engineering and Ceramic  
Technology

**Assistant Professor Kingshuk CHATTERJEE, PhD**

E-mail: [kingshukchatterjee@gcect.ac.in](mailto:kingshukchatterjee@gcect.ac.in); [kingshukchatterjee@gmail.com](mailto:kingshukchatterjee@gmail.com)

Government College of Engineering and Ceramic  
Technology

**Professor Tanupriya CHOUDHURY, PhD**

E-mail: [tanupriya@ddn.upes.ac.in](mailto:tanupriya@ddn.upes.ac.in)

Computer Science, University of Petroleum and Energy Studies

#### **DETECTION OF EDIBILITY OF AMLA (*Emblica officinalis*) THROUGH PCA BASED IMAGE ANALYSIS**

*Abstract.* Identification of edibility of fruit samples is very essential, as well as difficult. This is more applicable in places where bulk fruits are used in different automated factories, where investigation of each fruit manually is an impossible task. In this work, we have proposed a principal component analysis (PCA) based threshold classifier scheme for the identification of edibility of amla fruits. We have analyzed only the hue histogram of the image samples using PCA to segregate the samples into Good, Intermediate or Bad classes. Use of analysis like PCA reduces the computational burden many folds compared to the other supervised learning models involving variants of neural network, or mathematically heavier transform based models like wavelet or Fourier transforms. The model is validated using

mail.google.com/mail/u/0/Winbox/EMfzgrGonPWbHKpLQwfhhbKwWvqDmU/?projector=1

Journals.pdf

Electric Power Components and Systems, 9(9) 1–14, 2022  
© 2022 Taylor & Francis Group, LLC  
ISSN: 1532-0008 print / 1572-0416 online  
DOI: 10.1080/15320008.2022.2129647

Taylor & Francis  
Taylor & Francis Group

Transmission Line Fault Localization With Mesh and Surface Analysis Using PCA Features

Alok Mukherjee,<sup>1</sup> Palash Kumar Kundu,<sup>2</sup> and Arabinda Das<sup>2</sup>

<sup>1</sup>Electrical Engineering, Govt. College of Engineering and Ceramic Technology, Kolkata, India  
<sup>2</sup>Department of Electrical Engineering, Jadavpur University, Kolkata, India

CONTENTS

- 1. Introduction
- 2. Methods of Design
- 3. Case Study and Algorithm Development
- 4. Result of the Fault Localizer
- 5. Discussion
- 6. Conclusion


References

Abstract—The proposed work investigates the application of principal component analysis (PCA) in localizing fault in a 150km transmission line. Quarter-cycle pre-fault and half-cycle post-fault sending and noise line currents are analyzed for faults conducted at intermediate locations with varying fault resistance. Principal component scores, so found, are further analyzed to form a planar mesh structure and smooth fit surface model, from which the distance of the test signal is predicted. Finally, the two models have been validated. The two dimension mesh and the three dimension polynomial surface model produce an average percentage error of 0.2923% and 0.2619%, respectively. The maximum Percentage Error obtained using the two methods are 2.167% and 2.035%, respectively. The high accuracy and low computational burden are achieved in presence of power system noise as well as variation of fault location and fault resistance. robustness of the proposed localizer models. The proposed method has the advantage of the proposed algorithm using PCA method to reduce the memory requirement by reducing dimensionality to a data set, reducing faster computation, especially compared to

Page 31 / 34

journals-15.pdf | Journals.pdf | Journals.pdf

1:32 PM  
6/26/2023

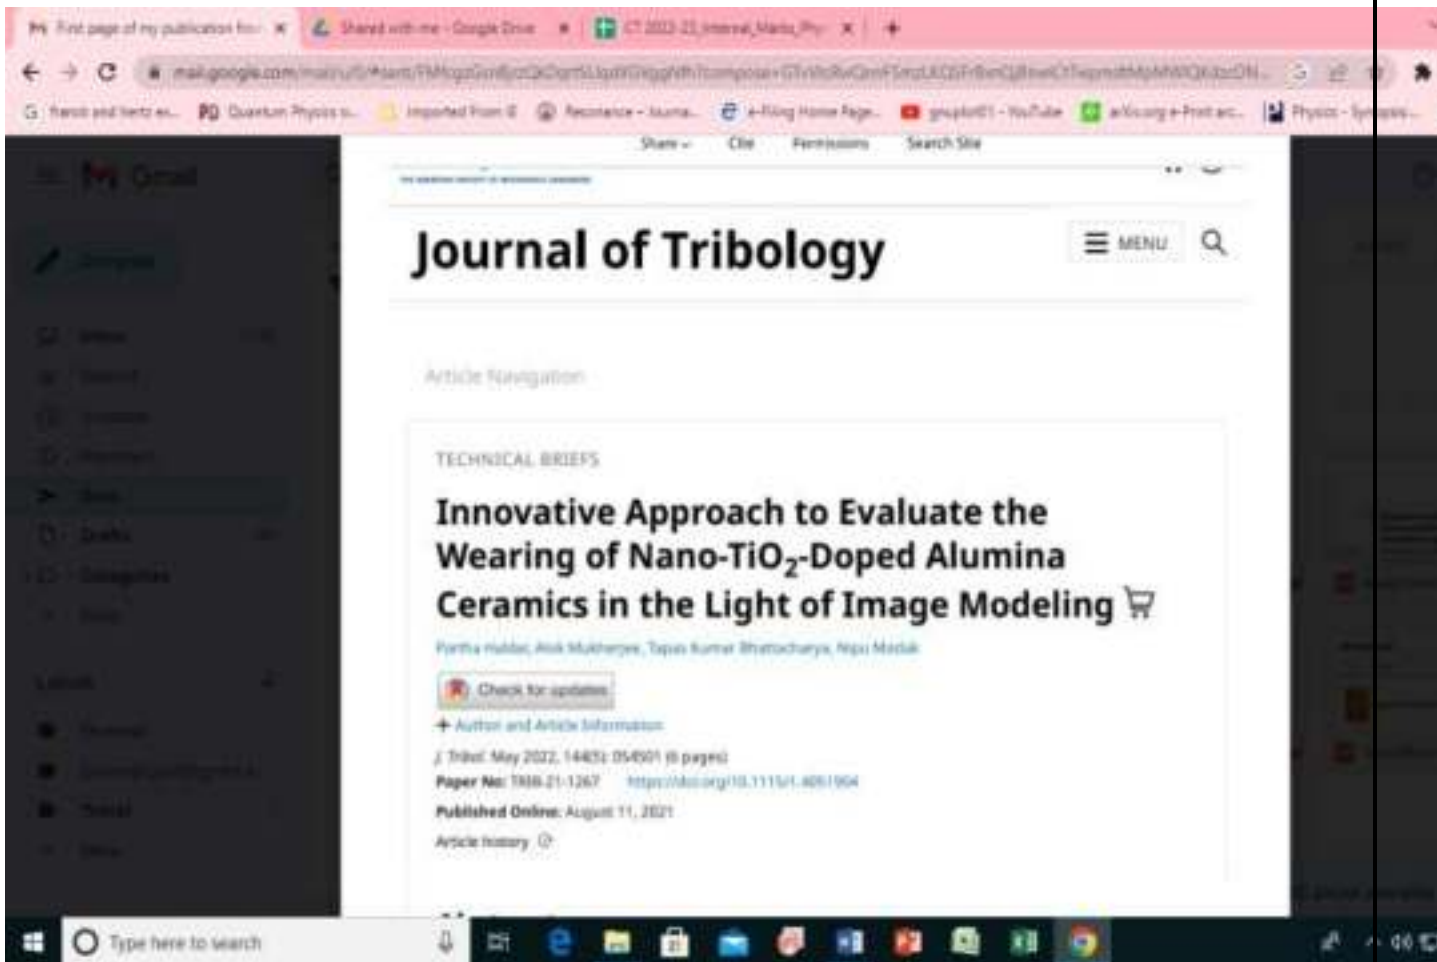

**2020-21**

The image shows a screenshot of a web browser displaying an article on Springer Link. The browser's address bar shows the URL: [link.springer.com/article/10.1134/S1070363220120403](https://link.springer.com/article/10.1134/S1070363220120403). The page header includes the Springer Link logo and navigation options: "Find a journal", "Publish with us", and a search bar. The article title is "Recent Studies on Applications of Schiff Bases and Their Complexes in Atmospheric Carbon Dioxide Capture", published on 05 February 2021, by Debudul Maity. The journal is "Russian Journal of General Chemistry", volume 90, pages 2473-2483 (2020). The article has 143 accesses and 2 citations. The abstract begins with: "Over many decades, global warming induced by the rising level of atmospheric carbon dioxide appeared to be the point of high concern. Energy demand in running the modern civilisation is mainly fulfilled by combustion of fossil fuels, which, in turn, produces carbon dioxide as a". The Windows taskbar is visible at the bottom of the screenshot.

link.springer.com/article/10.1134/S1070363220120403

Antipovus Cylindr... Making Graphene T... Physics - Synthesis... Orbital hybridisatio... Drawing Orbitals R... Calendar - Wikipedia

**SPRINGER LINK**

Find a journal | Publish with us | Search

Home > Russian Journal of General Chemistry > Article

Published: 05 February 2021

## Recent Studies on Applications of Schiff Bases and Their Complexes in Atmospheric Carbon Dioxide Capture

Debudul Maity

Russian Journal of General Chemistry **90**, 2473–2483 (2020) | [Cite this article](#)

143 Accesses | 2 Citations | [Metrics](#)

### Abstract

Over many decades, global warming induced by the rising level of atmospheric carbon dioxide appeared to be the point of high concern. Energy demand in running the modern civilisation is mainly fulfilled by combustion of fossil fuels, which, in turn, produces carbon dioxide as a

World Scientific  
Connecting Great Minds

Search My Cart Sign In

Subject Journals Books Major Reference Works Resources For Partners Open Access About Us Help

**Cookies Notification**  
We use cookies on this site to enhance your user experience. By continuing to browse the site, you consent to the use of our cookies. [Learn More](#)  
[I Agree](#)


International Journal of Modern Physics D | VOL. 26, NO. 14

## Nonsingular solution with anisotropic fluid in mini bang cosmology

Satish Ray, Anil Kumar Yadav, F. Rahaman, and U. Debnath

<https://doi.org/10.1142/S0218271820501187>

Figure References Related Details

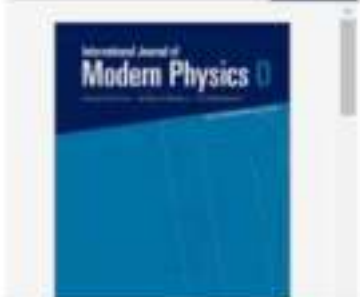

Tools Share

18.1142/S021827...pdf

14:28  
25-05-2023

Published: 02 September 2020

# A novel decision-based adaptive feedback median filter for high density impulse noise suppression

Kamranjames, Mausumi Maitra  & Susanta Chakraborty

*Multimedia Tools and Applications* **80**, 299–321 (2021) | [Cite this article](#)

219 Accesses | 4 Citations | [Metrics](#)

## Abstract

The qualitative performances of the digital image processing methods are degraded due to the presence of impulse noise. The conventional median filter and its advanced versions somehow manage to remove the noise from image but cannot preserve the image details. In this paper, a novel decision based adaptive feedback median filter is proposed to suppress the high density noise and preserve the details of the image. The proposed method detects the corrupted or noisy pixels by analyzing the neighbours in a decisive manner, which is a challenging task for the different types of images and noise. It predicts a local threshold by analyzing the neighbours to decide the adaptive nature of the feedback median filter. The feedback mechanism is adapted to enhance the qualitative results. Various types of images and noise densities have been used to evaluate the performance of the proposed method. The qualitative

World Scientific  
Connecting Great Minds

International Journal of Modern Physics D | Vol. 30, No. 06, 2150001 (2021)  
Research Paper

## Wormhole solutions in $f(R)$ gravity


B. Mishra, A. S. Agrawal, S. K. Tripathy, and Sotilal Ray

<https://doi.org/10.1142/S0218271821500619> | Cited by: 7

PDF/EPUB    Tools    Share    Recommend To Library

### Abstract

In this work, we studied the traversable wormholes geometry in  $f(R)$  theory gravity, where  $R$  is the Ricci scalar. The wormhole solutions for some assumed  $f(R)$  functions are presented. The assumption of  $f(R)$  is based on the fact that its behavior changed with an assumed parameter  $\alpha$  rather than the deceleration parameter. Three models are



Metrics

ScienceDirect

Journals & Books

Access Through your institution    Purchase PDF

Article preview

Annals of Physics  
Volume 428, May 2021, 108429

## Anisotropic charged strange stars in Krori-Barua spacetime under $f(R, T)$ gravity

Susanta Banerjee<sup>a</sup>, Debabrata Deb<sup>a</sup>, Subal Saha<sup>a</sup>, A. B. S. Guha<sup>a</sup>

Show more options

Add to My Library    Share    Cite

<https://doi.org/10.1016/j.aop.2021.108429>    See rights and content

ScienceDirect Journals & Books Search... Register Sign in

Download full issue

Outline: Highlights Abstract Keywords Introduction Mathematical structure of Einstein-Maxwell... Solutions to the Einstein-Maxwell field equati... Boundary conditions Physical features of the proposed model Concluding remarks CRediT authorship contribution statement

**Results in Physics**  
Volume 10, January 2021, 101949

**Charged strange stellar model describing by Tolman V metric**

S.K. Maurya<sup>a</sup>, S.K. Mishra<sup>a</sup>, J. B. Saini<sup>b</sup>, S. S. Debnath<sup>c</sup>, S. Ghosh<sup>d</sup>, S. Ghosh<sup>e</sup>, S. Ghosh<sup>f</sup>, S. Ghosh<sup>g</sup>, S. Ghosh<sup>h</sup>, S. Ghosh<sup>i</sup>, S. Ghosh<sup>j</sup>, S. Ghosh<sup>k</sup>, S. Ghosh<sup>l</sup>, S. Ghosh<sup>m</sup>, S. Ghosh<sup>n</sup>, S. Ghosh<sup>o</sup>, S. Ghosh<sup>p</sup>, S. Ghosh<sup>q</sup>, S. Ghosh<sup>r</sup>, S. Ghosh<sup>s</sup>, S. Ghosh<sup>t</sup>, S. Ghosh<sup>u</sup>, S. Ghosh<sup>v</sup>, S. Ghosh<sup>w</sup>, S. Ghosh<sup>x</sup>, S. Ghosh<sup>y</sup>, S. Ghosh<sup>z</sup>

Show more

+ Add to Mendeley < Share > Cite

<https://doi.org/10.1016/j.rinp.2021.101949> Get rights and content >

Download full issue

Recommended articles

A study of anisotropic spheres in modified gravity via embedding...  
Annals of Physics, Volume 452, 2020, Article 148222  
M.B. Hossain, ... S. Hossain

Exact solutions of fluid spheres in  $f(R, T)$  gravity under Karmarkar...  
Annals of Physics, Volume 452, 2020, Article 148221  
S. Hossain, ... H. Fouad El-Shahhat

Embedding class I model of anisotropic fluid spheres in  $f(R, T)$  gravity

ScienceDirect Access through your institution Purchase PDF

Article preview Abstract Introduction Section snippets References (16) Cited by (7) Recommended articles (6)

**Chinese Journal of Physics**  
Volume 71, June 2021, Pages 548-560

**Anisotropic stars in Brans-Dicke gravity**

S.K. Maurya<sup>a</sup>, K. N. Singh<sup>b</sup>, S. S. Debnath<sup>c</sup>

Show more

+ Add to Mendeley < Share > Cite

<https://doi.org/10.1016/j.cjph.2021.05.019> Get rights and content >

**Abstract**

In the present work we show application of Brans-Dicke theory of gravitation, as an alternative to Einstein's general relativity, in modeling astrophysical compact stellar objects.

FEEDBACK

2021 25-05-2021



ScienceDirect Journals & Books Search Register Sign in

Access through your institution

Article preview

Physics of the Dark Universe  
Volume 31, January 2022, 100710

Decoupling gravitational sources in  $f(R, T)$  gravity under class I spacetime

S.K. Maurya<sup>a</sup>, J. B. Taparia-Solis-Cruz<sup>a</sup>, S. Bahal Rai<sup>a</sup>

Show more

Add to My Library Show Cite

https://doi.org/10.1016/j.dark.2022.100710

See rights and permissions

Download this article in PDF

Typ here to search

ePrints@IISc Home | About | Browse | Latest Additions | Advanced Search | Contact | Help

Non-isothermal decomposition kinetics of nano-scale CaCO<sub>3</sub> as a function of particle size variation

Ray, S and Bhattacharya, TK and Singh, VK and Deb, D and Ghosh, S and Das, S (2021) Non-isothermal decomposition kinetics of nano-scale CaCO<sub>3</sub> as a function of particle size variation. In: Ceramics International, 47 (1), pp. 355-364.

PDF  
Cer\_107\_47\_1\_355-364.pdf - Published Version  
Restricted to Registered users only  
Download (485) | Request a copy

Official URL: <https://dx.doi.org/10.1016/j.ceramint.2020.06.118>

**Abstract**

We report the synthesis of nanocrystalline calcium carbonate with varying particle sizes by precipitation technique from an aqueous solution of calcium nitrate and sodium carbonate at controlled pH. The particle size of the carbonate powder was precisely controlled by changing the precursor concentration. The synthesized carbonate powders were characterized by using scanning electron microscopy, X-ray diffraction technique, and transmission electron microscopy. The particle size, along with the crystallite size of as-synthesized carbonate powder, decreases with increasing precursor concentration. The non-isothermal decomposition kinetics of the carbonate powder was also evaluated by using near to the modified Arrhenius equation's exact solution. The experimental results were best fitted at  $n = 0.5$ , and the one-dimensional diffusion-controlled transport process mechanism (D1) and one-dimensional phase boundary movement mechanism (R1) was found to be very close fit of the corresponding evaluated  $g(x)$  value. The apparent activation energy of the nano calcium carbonate decomposition was found in the range of 120.4–175 kJ/mol, which is also inherently functioning with the average particle size. The apparent activation energy of decomposition of CaCO<sub>3</sub> found to be decreased with decreasing average particle size of nanocrystalline calcium carbonate. © 2020 Elsevier Ltd and Techna Group S.r.l.

**Item Type:** Journal Article  
**Publication:** Ceramics International  
**Publisher:** Elsevier Ltd  
**Additional Information:** Copyright to this article belongs to Elsevier Ltd

**Keywords:** Activation energy; Calcite; Calcium carbonate; Carbonator; Crystallite size; High resolution transmission electron microscopy; Isotherms; Nanocrystalline powders; Nanocrystals; Particle size analysis; Precipitation (chemical); Scanning electron microscopy; Sodium Carbonate; Sodium compounds; Apparent activation energy; Modified arrhenius equation; Nano calcium carbonate; Non-isothermal decomposition kinetics; Particle size variation; Precipitation techniques; Precursor concentration; X-ray diffraction techniques; Particle size

**Department/Centre:** Division of Physical & Mathematical Sciences > Physics

2021-05-27 10:45:33



Contents lists available at ScienceDirect

New Astronomy

journal homepage: [www.elsevier.com/locate/newast](http://www.elsevier.com/locate/newast)

## Dilaton-Axion Black Hole under the Solar System Tests

Amna Ali<sup>a</sup>, Sabiruddin Molla<sup>b</sup>, Farook Rahaman<sup>a,\*</sup>, Ruhul Amin<sup>b</sup>, Gurudas Mandal<sup>c</sup>, Saibal Ray<sup>c</sup><sup>a</sup> Department of Mathematics, Jadavpur University, Kolkata 700032, West Bengal, India<sup>b</sup> Department of Mathematical and Physical Sciences, East West University, Dhaka 1212, Bangladesh<sup>c</sup> Department of Physics, Government College of Engineering and Ceramic Technology, Kolkata 700033, West Bengal, India

## ARTICLE INFO

## PAGE

04–12

04–12

04–12

04–12

Dilaton-axion black hole

Solar system test

perihelion precession

deflection of light

## ABSTRACT

In the present paper we study the static and spherically symmetric dilaton-axion black hole in the testing ground of the Solar system. We constrain the parameters of the string motivated dilaton-axion form of the classical test of general relativity, viz., the perihelion precession of the planet Mercury and the deflection of light by the Sun. In this case we have two free parameters: the dilaton strength and the point of curvature singularity of black hole. We obtain the permissible range of these two parameters from theoretical analysis based on the model and later compare them with the observations.

## 1. Introduction

The remarkable discovery of gravitational wave from the merger of black holes in a distant galaxy and capturing an image of a black hole's silhouette has led us to an exciting era of astronomy, where we have accomplished what was previously thought to be impossible (Abbott, 2016). These observations provide circumstantial evidence for the existence of black holes, as we cannot directly observe it. The idea of these bizarre objects in space, which are so massive and dense that light could not escape it, has been around for centuries. Most notably, black holes were predicted by Einstein's theory of general relativity, which showed that when a massive star dies, it leaves behind a small, dense remnant core, that has undergone a cataclysmic explosion known as a core-collapse supernova.

Presently we have good observational evidence that black holes exist throughout the universe. For example, it is thought that most galaxies in the Universe, including the Milky Way, contain a supermassive black hole at their center - with masses millions or even billions of times that of the Sun. There are also evidences of many black holes with much lower masses (ranging from a few to a few dozen times of the Sun's mass), throughout the galaxy.

Alongside this substantial progress in the direct as well as indirect observations on black holes, there have been dramatic improvements in our theoretical understanding of black holes. Over the past decade, some remarkable studies have been made to investigate the black hole solutions in various alternative theories of gravity, particularly theories of gravitation

with background scalar and pseudo-scalar fields (Dobson, 1974). Such fields are non-minimally coupled to gravity and thus black hole solutions exist only for some specific choice of couplings (Dobson, 1992). This type of specific couplings naturally arise in low energy effective string theory models and are comprised of two massless scalar fields - the dilaton and the axion. Recently (Su et al., 2000) have employed the dilaton and axion fields coupled to the electromagnetic field in a more generalised coupling in four dimension by using the low energy action. Exploiting this new idea, they have found both asymptotically flat and non-flat dilaton-axion black hole solutions. The dilaton field has substantial cosmological as well as astrophysical implications and therefore is a subject of great interest in cosmology (Kasperis and Vasiliev, 2003) and in the context of charged black holes (Dobson, 1992; Ghosh and SenGupta, 2000; Ghosh et al., 2010; Rahaman et al., 2010; Yang et al., 2010; Ghosh and SenGupta, 2017; Ghosh and Mandal, 1999; Garfinkle et al., 1991).

In this paper, motivated by the above mentioned works, we study the astrophysical tests on the black hole. To establish this we shall focus the geometry of the exterior of a compact stellar type object (the Sun), which is the static and spherically symmetric, metric as proposed by Su et al. (2000).

The plan of our study is as follows: In the next Sec. 2 we discuss the spherically symmetric solution in the string inspired theory of gravity with scalar coupled to electromagnetic gauge field. Further, in Sec. 3 we investigate the dilaton-axion black hole in the Solar system and perform classical tests of general relativity, viz., the perihelion precession of mercury and the deflection of light by the Sun using which we

\* Corresponding author.

E-mail addresses: [amnaali@jpu.ac.in](mailto:amnaali@jpu.ac.in) (A. Ali), [sabiruddinmolla111@gmail.com](mailto:sabiruddinmolla111@gmail.com) (S. Molla), [farook.rahaman@ Jadavpur-univ.ac.in](mailto:farook.rahaman@ Jadavpur-univ.ac.in) (F. Rahaman), [sabiruddinmolla111@gmail.com](mailto:sabiruddinmolla111@gmail.com) (R. Amin), [ghurudas@rediffmail.com](mailto:ghurudas@rediffmail.com) (G. Mandal), [sabiruddinmolla111@gmail.com](mailto:sabiruddinmolla111@gmail.com) (S. Ray).

<https://doi.org/10.1016/j.newast.2020.101494>

Received 29 May 2020; Received in revised form 10 July 2020; Accepted 10 August 2020

Available online 19 August 2020

1384-1076/ © 2020 Elsevier B.V. All rights reserved.



## N.R. Sen: Father of Indian Applied mathematics

Saibal Ray<sup>1,\*</sup>, Utpal Mukhopadhyay<sup>2,b</sup>, and Rajinder Singh<sup>3,c</sup>

<sup>1</sup> Department of Physics, Government College of Engineering and Ceramic Technology, Kolkata, West Bengal 700016, India

<sup>2</sup> Satyabharati Vidyapeeth, Nabapally, Barasat, North 24 Parganas, Kolkata, West Bengal 700126, India

<sup>3</sup> Research Group - Physics Education and Science Communication, Physics Institute, University of Odenburg, 26111 Odenburg, Germany

Received 27 June 2020 / Accepted 8 January 2021

© The Author(s), under exclusive license to EDP Sciences, Società Italiana di Fisica and Springer-Verlag GmbH Germany, part of Springer Nature 2021

**Abstract** Nikhilaranjan Sen (1894–1963), popularly known as N.R. Sen, is known as the Father of Applied Mathematics and founder of the Calcutta School of Relativity Theory. He did Ph.D. in Berlin under the Nobel Laureate Max von Laue. In Berlin he came in contact with renowned physicists like Max Planck, Albert Einstein and their contemporaries. The present article, which is based on the primary sources, discusses the lesser known facts of his life, like the beginning of scientific career, background of his D.Sc. as well as Ph.D. theses, and detailed summary of his scientific works.

### 1 Introduction

Nikhil Ranjan Sen (May 23, 1894–January 13, 1963) also written as Nikhilaranjan Sen or N.R. Sen (abh. NRS) was one of the initiators of the research in General Theory of Relativity in India. He belonged to the generation of M.N. Saha, known for his Saha ionization equation (Saha 1920) and S.N. Bose, famous for his Bose–Einstein statistics (Bose and Einstein 1924–1925). He was closer to the latter and its memorable that Bose wrote Sen's obituary for "Nature" (Bose 1963a).

NRS was the Founder Member of the Indian National Science Academy (INSA). The Academy published his short biographical sketch (Burman 1963). Recently, as a part of discussion on the role of Calcutta University in the development of Mathematics in India, the scientific contribution of N.R. Sen has been very scantily highlighted (Bhattacharjee, Mukherji and Mallik 2013). To the best of our knowledge, none of the published articles on NRS deals properly with the formative years of his life in Kolkata and Berlin chapter. Also, his scientific work is not discussed in entirety throughout his career with full professionalism in varied research areas of applied mathematics, especially in the field of budding Relativistic Cosmology and Astrophysics. The present article intends to fill the gap.

In the following we give:

#### 1. A short biography

\* e-mail: saibal@associates.turca.in  
(corresponding author)

<sup>b</sup> e-mail: utpalsb@yahoo.com

<sup>c</sup> e-mail: rajinder.singh@uni-odenburg.de

2. Career: Background of his D.Sc. and Ph.D. theses
3. Scientific works: Detailed summary

### 2 N.R. Sen: a short biography

As far as biography of NRS is concerned, unless not explicitly referred to, the following biographical details are based on the following sources available in the literature (Bose 1963b; Burman 1966; Mukherjee and Bhattacharjee 2014; Singh 2019).


Nikhilaranjan Sen, son of Kalimohan Sen and Bidhannikhi Devi, was born on May 23, 1894, in the Dacca district of undivided India (now in Bangladesh). Kalimohan was a reputed advocate of Dacca court. Nikhilaranjan passed Entrance Examination in 1909 from Rajshahi Collegiate School winning a first grade Government Scholarship. In 1913, he did B. Sc. with Honours in Mathematics, as student of Presidency College, Calcutta (presently Kolkata). Then, he entered Calcutta University M. Sc. Course in Mixed Mathematics (afterward known as Applied Mathematics). In M. Sc. classes, Sen had the opportunity of learning from two famous Professors, viz. C.E. Cullis and D.N. Mallick who taught in postgraduate classes. However, due to his ailment, Nikhilaranjan could not appear in the M.Sc. Final Examination in 1915. In the following year, he passed that examination securing First Class First position.


In 1917, the first appointments were made at the newly founded College of Science and Technology, University of Calcutta. According to the annual report of syndicate, Prof. Ganesh Prasad, while presenting the

ScienceDirect




Access through your institution Purchase PDF


Article preview  
Abstract  
Introduction  
Section snippets  
References (85)  
Cited by (28)  
Recommended articles (8)



 Chinese Journal of Physics  
Volume 71, June 2021, Pages 419–422





## Bouncing universe models in an extended gravity theory

S.K. Timothe<sup>a</sup> , B. Mishra<sup>a</sup> , Seibal Rea<sup>a</sup> ,  
Biprasit Sen Gupta<sup>a</sup> 


Show more 

+ Add to Mendeley  Share  Cite

<https://doi.org/10.1016/j.cjph.2021.01.028>  Get rights and content 

### Abstract

Some bouncing models are investigated in the framework of an extended theory of gravity. The extended gravity

FEEDBACK 

2021  
27-05-2021

Google Account | Inbar O.050 - yamap... | CD 0458 - 0458... | A semi-classical model... | scienceirect.com/locate/article/pii/S22116585(21)00046

ScienceDirect

Access through your institution

Article preview

Abstract

Introduction

Section snippets

References (55)

Cited by (1)

Recommended articles (8)

**Physics of the Dark Universe**  
Volume 32, May 2021, 100821

**A semi-classical model of regular inflationary cosmology**

Bilal Dak<sup>a, \*</sup>, M. Ta. Kholopov<sup>a, \*†</sup>, Mehdi Salem<sup>a</sup>, Saïbal Ray<sup>a, R</sup>

Show more

+ Add to Mendeley | Share | Cite

<https://doi.org/10.1016/j.dark.2021.100821> | Get rights and content

**Abstract**

Quantum-effective gravity must lead to a regularized cosmology and thereby by itself source and regulate the

FEEDBACK

2021  
27-05-2021

The image is a screenshot of a web browser displaying the article page for "Gravastar in the framework of braneworld gravity" on the Physical Review D website. The browser's address bar shows the URL [journals.aps.org/prd/abstract/10.1103/PhysRevD.102.024037](https://journals.aps.org/prd/abstract/10.1103/PhysRevD.102.024037). The page header includes the APS logo, navigation links for Journals, Physics Magazine, and Help/Feedback, and a search bar. The main title "PHYSICAL REVIEW D" is prominently displayed, with the subtitle "covering particles, fields, gravitation, and cosmology". Below this, a navigation menu lists "Highlights", "Recent", "Accepted", "Collections", "Authors", "Refines", "Search", "Press", "About", and "Editorial Team". The article title "Gravastar in the framework of braneworld gravity" is centered, with a green lock icon to its right. The authors listed are "Ritupriya Sengupta, Shounak Ghosh, Saibal Ray, B. Mishra, and S. K. Tripathy", and the publication information is "Phys. Rev. D **102**, 024037 – Published 10 July 2020". There are social media sharing icons for Twitter, Facebook, and a general share icon. Below the article title, there are buttons for "Article", "PDF", "HTML", and "Export Citations". The "ABSTRACT" section begins with the text: "Gravastars have been considered as a serious alternative to black holes in the past couple of decades. Stable models of gravastar have been constructed in many of the alternate". To the right of the abstract, the issue information is "10509 Vol. 102, No. 2 – 15 July 2020". At the bottom of the page, a dark banner contains the text "This site uses cookies. To find out more, read our Privacy Policy" and a blue "I Agree" button. The browser's taskbar at the very bottom shows several open tabs, including "anand100-1.pdf", "anand100.pdf", and "memra2020-1.pdf", and the system tray shows the time as 12:49 on 27-05-2021.

Google Chrome browser window showing the MDPI article page for "Study on Anisotropic Strange Stars in  $f(T, T)$  Gravity".

MDPI logo and navigation icons are visible at the top.

**Open Access Article**

### Study on Anisotropic Strange Stars in $f(T, T)$ Gravity

by Ines G. Salado <sup>1,2</sup>, M. Khlopov <sup>3,4,5</sup>, Saibal Ray <sup>6,7</sup>, M. Z. Arshad <sup>7,8</sup>, Parvati Saha <sup>7,9</sup> and Ujjal Debnath <sup>1,10</sup>

- <sup>1</sup> Ecole de Génie Rural (EGR), 01 BP 55 Kérou, Bénin
- <sup>2</sup> Institut de Mathématiques et de Sciences Physiques (IMSP), 01 BP 813 Porto-Novo, Bénin
- <sup>3</sup> MEPhI (Moscow Engineering Physics Institute), National Research Nuclear University, 115409 Moscow, Russia
- <sup>4</sup> CNRS, Astroparticule et Cosmologie, Université de Paris, F-75013 Paris, France
- <sup>5</sup> Institute of Physics, Southern Federal University, 344090 Rostov-on-Don, Russia
- <sup>6</sup> Department of Physics, Government College of Engineering and Ceramic Technology, Kolkata 700010, India
- <sup>7</sup> Département de Physique, Université d'Abomey-Calavi, BP 526 Calavi, Bénin
- <sup>8</sup> Department of Mathematics, Indian Institute of Engineering Science and Technology, Shripur, Howrah 711103, India
- <sup>9</sup> Author to whom correspondence should be addressed.

Universe **2020**, *8*(10), 167. <https://doi.org/10.3390/universe8100167>

Received: 24 August 2020 / Revised: 25 September 2020 / Accepted: 30 September 2020 / Published: 1 October 2020

(This article belongs to the Special Issue Universe: Feature Papers - Compact Objects)

Download | Browse Figures | Versions Notes

Taskbar at the bottom shows the Windows operating system with various application icons and the system clock displaying 10:51 on 27-09-2021.

Google Ads | News (2/0) | YouTube | Bing | News | Sci-Pub | Downloads | World Scientific

worldscientific.com/doi/10.1142/S0218271820501187

**World Scientific**  
Connecting Great Minds

Search | My Cart | Sign In

Subject | Journals | Books | Major Reference Works | Resources For Partners | Open Access | About Us | Help

International Journal of Modern Physics D | Vol. 29, No. 16, 2050118 (2020)  
Research Paper

# Nonsingular solution with anisotropic fluid in mini bang cosmology

Sabir Ray, Anil Kumar Yadav, F. Rahaman, and G. Debnath

<https://doi.org/10.1142/S0218271820501187> | Cited by: 1

< Previous | Next >

PDF/EPUB | Tools | Share | Recommend To Library

## Abstract

In this work, we study cosmological evolution in the mini creation event with



10.1142/S0218271820501187

20.1007/112646-0L.pdf | 10.1142/S0218271820501187.pdf | 10.1142/S0218271820501187.pdf

Show all

10:14 20-05-2021



World Scientific  
Connecting Great Minds

Search My Cart Sign In

Subject Journals Books Major Reference Works Resources For Partners Open Access About Us Help

International Journal of Modern Physics D | Vol. 29, No. 15, 2050100 (2020)  
Research Paper

# Cosmological models with squared trace in modified gravity

B. Mishra, S. K. Tripathy, and Sibaia Rayos


<https://doi.org/10.1142/S0218271820501000> | Cited by: 0

< Previous Next >

PDF/EPUB Tools Share Recommend To Library

## Abstract

In this work, we present a few simple cosmological models under the modified theory

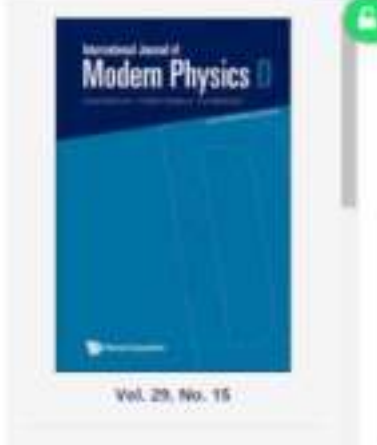

10.1007/s12648-01...pdf 10.1007/s12648-...pdf 10.1142/S02182718...pdf Show all X

10/15 20-05-2021



## Digitized data validation using dual color images with improved robustness and error correction facility

ANIRBAN GOSWAMI<sup>1\*</sup>, SOUMIT CHOWDHURY<sup>2</sup>, RITESH MUKHERJEE<sup>3</sup> and NABIN GHOSHAL<sup>4</sup>

<sup>1</sup>Department of IT, Techno Main Salt Lake, Sec - V, Kolkata 700091, India

<sup>2</sup>Department of CSE, Government College of Engineering and Ceramic Technology, Kolkata 700010, India

<sup>3</sup>Centre for Development of Advanced Computing, Kolkata, India

<sup>4</sup>Department of ETS, University of Kalyani, Kalyani, West Bengal 741235, India

e-mail: angoskol@gmail.com

MS received 9 August 2020; revised 15 February 2021; accepted 1 April 2021

**Abstract.** The proposed algorithm takes an initiative to justify strong ownership claims by blending visual cryptography with steganography, which is quite different from a conventional approach. The major consideration of the proposed protocol is to implement cryptographic technique in digitized document justifying Confidentiality, Integrity, Authenticity and Non-Repudiation, similar to cryptographic technique implementation in born digital document. In addition, the approach is less complex than a conventional system but without compromising the level of security. For the protection of a sensitive or copyright document, the owner cleans the digitized signature, generate two shares and fabricate one of the shares alongside the encrypted message digest of the signature in the pseudorandom positions of coiflet transformed blocks. Instead of using a single plane as cover, three planes of two color images are utilized to enhance the effect of robustness in hiding. The secret fabrication in frequency domain preserves excellent security as well as imperceptibility of the hidden data. The loss of signal due to white noise is properly adjusted to make the authenticated images resemble close to the original ones as depicted with the histogram and RGB analysis. Moreover, an intended receiver only will be able to verify the confidentiality of the document and the owner through self-defined appropriate techniques. Finally, the worthiness of the algorithm in digitized domain is established through exhaustive experimentation in terms of data hiding imperceptibility, robustness and data recovery aspects.

**Keywords.** Visual cryptography; share generation; hamming code; key exchange; image compression; SSIM.

### 1. Introduction

The modern era of digital communication highly demands sustainability of authenticity and non-repudiation properties of data security. The problem of information hacking was somewhat resisted using watermarking and when used in digital data authentication [1, 2] applies to low risk transmission. In addition, steganography can cater undetectability, resistance to various image processing methods, compression and capacity of the secret data categorically. So, watermarking and steganography [3–5] concepts combined can protect secured digital documents.

In covert communication, only intended authorized receiver should confirm ownership of content [6, 7]. User authentication was first proposed by A. Shamir [8] with the help of private and public shares. So, the advantage of retaining correct data in share based digital data

authentication can be quite handy in protecting secured data. Generally, data authentication protocols are implemented either in spatial or frequency domain. Due to efficient performance and wide popularity of Discrete Cosine Transform (DCT) domain, Cox *et al* [9] suggested that DCT can be used extensively in Joint Photographic Experts Group (JPEG) compression procedure. In addition, Koch *et al* [10] suggested the use of middle band frequency coefficients of a DCT transformed block for sensitive data fabrication to resist JPEG compression. But the problem of blocking artifacts was somewhat eliminated by wavelet transform [11] which shows superiority during transmission and decoding errors.

In the context of using wavelet transform in digital data authentication, Garima Chopra *et al* [12] proposed Geometric wavelet in image coding method and the performance is improved in comparison to embedded zero-tree wavelet (EZW), the set partitioning in hierarchical trees (SPIHT) and the embedded block coding with optimized

\*For correspondence.  
Published online: 09 June 2021

## ORIGINAL ARTICLE

# A novel approach toward microstructure evaluation of sintered ceramic materials through image processing techniques

Sandipan Chowdhury<sup>1</sup> | Dipika Dhara<sup>2</sup> | Soumit Chowdhury<sup>3</sup> | Partha Haldar<sup>4</sup> | Kingshuk Chatterjee<sup>5</sup> | Tapas Kumar Bhattacharya<sup>1</sup>

<sup>1</sup>Department of Ceramic Technology, Government College of Engineering & Ceramic Technology, Kolkata, India

<sup>2</sup>Department of Information Technology, Maulana Abul Kalam Azad University of Technology, Haringhata, India

<sup>3</sup>Department of Computer Science & Engineering, Government College of Engineering & Ceramic Technology, Kolkata, India

<sup>4</sup>Department of Mechanical Engineering, Government College of Engineering & Ceramic Technology, Kolkata, India

### Correspondence

Tapas Kumar Bhattacharya, Department of Ceramic Technology, Government College of Engineering & Ceramic Technology, Kolkata-700 010, India.  
Email: tkb\_ceramics@yahoo.co.in

### Funding information

Department of Science and Technology and Biotechnology, Govt. of West Bengal, Grant/Award Number: 19 (San.)-ETP/S&T/61-4/2018

### Abstract

In this paper, an image processing technique is introduced to measure the grain size and their distributions from the SEM image of copper oxide (CuO) and titanium dioxide (TiO<sub>2</sub>) doped sintered alumina ceramics accurately. The noise present in SEM image is removed by applying low pass Gaussian filter followed by suppression of regional minima over a threshold. The clarity of individual grains and grain boundaries have been done by applying Watershed transform to this preprocessed SEM image. Morphological operations like dilation and erosion are used to make the grain-boundary edges clear and continuous. The individual grain size in  $\mu\text{m}$  scale is measured from the pixel length of the rectangular bounding box drawn around the segmented grain. The normal Gaussian type distribution of grain size is observed in both CuO- and TiO<sub>2</sub>-doped grains in SEM image. The average grain size of CuO-doped alumina grains (2.24  $\mu\text{m}$ ) is very close to  $G_{50}$  value (2.17  $\mu\text{m}$ ), but  $G_{50}$  value of TiO<sub>2</sub>-doped grains (8.59  $\mu\text{m}$ ) is slightly higher than its average grain size (7.96  $\mu\text{m}$ ). The proposed algorithm is compared with linear intercept method and the grain sizes obtained are very close to each other.

### KEYWORDS

alumina, doping, grain size, image processing, scanning electron microscopy

## 1 | INTRODUCTION

The present research in material science and engineering are inclined toward interdisciplinary areas and in these aspect different tools of computer science plays an essential role to evaluate and explain the material properties more accurately. Therefore, emerging research work focuses to frame an accurate and automated feature analysis of the properties of engineering materials.<sup>1</sup> Scanning electron microscopic (SEM) image is the acquisition of useful signal produced by the interactions between electron beams and surface electrons of the specimen. SEM image consists of grains of different phases, grain morphology, surface texture, pores, and inclusion in the microstructure.<sup>2</sup> The single oxide polycrystalline ceramics generally shows grain growth in an irregular manner. The dopant materials inhibit this abnormal

grain growth which is characterized by nonuniform grains of tetrahedra shape having log-normal size distribution. The average grain size is based on near to spherical geometry with not so much wide size distribution.<sup>3,4</sup> These can be studied in-depth with the help of digital image processing technology.<sup>5–7</sup> The properties of engineering materials are related to the variation in grain size, size distribution, and pores present in the microstructure. The microstructures are also controlled by different process parameters like sintering temperature, soaking time, the effect of foreign inclusion, nature and concentration of doping, etc.<sup>8,9</sup> In this context the microstructure related studies based on different computing techniques such as fuzzy logic, neural network, and statistical image analysis should be highlighted. Dutta et al.<sup>10</sup> have studied tensile fractography of AISI 304LN austenitic stainless steel to detect and characterize

## ORIGINAL ARTICLE

## Effect of nano CuO addition on the tribo-mechanical behavior of alumina ceramics in non-conformal contact

Partha Haldar<sup>1</sup> | Tapas Kumar Bhattacharya<sup>2</sup> | Nipu Modak<sup>3</sup><sup>1</sup>Department of Mechanical Engineering,  
Government College of Engineering &  
Ceramic Technology, Kolkata, India<sup>2</sup>Department of Ceramic Technology,  
Government College of Engineering &  
Ceramic Technology, Kolkata, India<sup>3</sup>Department of Mechanical Engineering,  
Jalpaiguri University, Jalpaiguri, India

## Correspondence

Nipu Modak, Department of Mechanical  
Engineering, Jalpaiguri University, Kolkata  
700 052, India  
Email: aneetpa@gmail.com

## Abstract

Sintering of alumina from 1500°C to 1650°C and tribo-mechanical properties at room temperature had been investigated using nano CuO as a sintering aid. Bulk density gradually increases with sintering temperature from 1500°C to 1600°C and is optimized at 1600°C, beyond this, bulk density does not significantly increase at 1650°C. The addition of 2 wt% CuO showed the best result on densification. Densification of about 97.74% was attained at 1600°C with the incorporation of 2 wt% CuO. Nano CuO at grain boundaries forms CuAl<sub>2</sub>O<sub>4</sub> liquid which modifies the morphology of the grain and improves mechanical properties. The formation of self-lubricating tribo-film on the wear track results in a low coefficient of friction <0.2 and reduces specific wear rate. 4 wt% CuO addition increases contact tensile stress ( $\sigma_{max}$ ) by 51.2% and high Hertzian contact pressure ( $P_{max}$  = 1.51 GPa) causes plastic deformation of wear track. The re-solidified strengthening bond phase on the wear track simultaneously increases in friction coefficient and wear resistance with CuO addition. The optimizing effect of CuO addition shows that 2 wt% significantly decreases wear rate, and increases hardness and fracture toughness.

## KEYWORDS

Al<sub>2</sub>O<sub>3</sub>, mechanical properties, sintering, wear resistance

## 1 | INTRODUCTION

The well-known alumina ceramics have extensive structural application due to its outstanding physico-mechanical properties like hardness, wear resistance, good thermal conductivity, and thermal and chemical stability even at high temperature.<sup>1</sup> Its typical application includes in various engineering fields such as laser tubes, cutting tools, wear pads, high temperature electrical insulators, electronic substrates, automobiles, especially in unlubricated engines, aerospace, and even in biomaterials.<sup>2,3</sup> However, the fracture toughness of alumina ceramics is low, as a result, the material becomes brittle and thus its application reduces. Numerous research has been carried out to improve tribological behavior in conformal contact by incorporation of oxides like CuO, Y<sub>2</sub>O<sub>3</sub>, ZrO<sub>2</sub>, MgO, TiO<sub>2</sub>, Nb<sub>2</sub>O<sub>5</sub><sup>4-12</sup> and nonoxides like SiC, TiN, TiB<sub>2</sub>, CNT<sup>13</sup> etc as a secondary phase in alumina matrix.

Valefi et al.<sup>14</sup> investigated the effect of CuO addition into yttria stabilized tetragonal zirconia polycrystalline (Y-TZP) ceramics sliding against alumina ball in conformal contact. They reported that the coefficient of friction (COF) reduces to 0.35 with a low wear rate ( $<10^{-8}$  m<sup>3</sup>/N m) due to accumulation of soft copper oxide layer which causes shifting of the wear mechanism from brittle to ductile and increases wear resistance. The effect of different lubricating additives like TiC, CNT, CaF<sub>2</sub> etc to improve tribological attributes of alumina and alumina-zirconia composite up to a certain level of addition and range of temperature by reinforcement in the matrix was also reported by several researchers.<sup>15-19</sup> Counter-surface plays an essential role on COF. Kerkwijk et al.<sup>20</sup> have reported that COF changes from 0.65 to 0.43 when Al<sub>2</sub>O<sub>3</sub> ball is replaced by Y-TZP ball as a counter surface on 5 wt% CuO added alumina sintered. The tribo-mechanical properties of CuO/Y-TZP composite system sliding upon Al<sub>2</sub>O<sub>3</sub>

← \_kingshuk.pdf

Open with ▾

- 📁 Downloads
- 📁 Inbox
- 📁 Starred
- 📁 Drafts
- 📁 Categories
- 📁 Maps
- 📁 Labels
- 📁 Personal
- 📁 University - kalinga@gmail.com
- 📁 Travel
- 📁 More

APHASIOLOGY  
2021, VOL. 33, NO. 8, 1103-1124  
<https://doi.org/10.1080/1068798.2020.1818331>

[Check for updates](#)

## Effect of bilingualism on aphasia recovery

Durjoy Lahiri<sup>a</sup>, Alfredo Andia<sup>b</sup>, Souvik Dubey<sup>c</sup>, Riok Mukherjee<sup>d</sup>, Kingshuk Chatterjee<sup>e</sup> and Biran Kanti Ray<sup>f</sup>

<sup>a</sup>Bangor Institute of Neurosciences (BGIN) and SSKM Hospital Kolkata, Kolkata, India; <sup>b</sup>Institute of Linguistics and Intercultural Communication, LMU Sechenov First Moscow State Medical University, Moscow, Russia; <sup>c</sup>Altus University, Miami, FL, USA; <sup>d</sup>Electrical Engineering, Government College of Engineering and Ceramic Technology, Kolkata, India; <sup>e</sup>Computer Science and Engineering, Government College of Engineering and Ceramic Technology, Kolkata, India

**ABSTRACT**  
**Background:** The severity of post-stroke aphasia has also been reported to be less in bilingual patients compared to their monolingual counterparts.  
**Aim:** To analyze the effect of bilingualism on aphasia recovery during the early post-stroke phase.  
**Methods:** Bengali version of Western Aphasia Battery (WAB) was used for language assessment. It was administered during the first week and 90-100 days post-stroke. Severity assessment was done by calculating aphasia quotient (AQ). We enrolled 153 monolingual and 53 bilingual patients with aphasia, of whom 120 monolingual and 43 bilingual participants were followed up.  
**Results:** The probability of recovering was higher for bilinguals than in monolingual patients. When the location of stroke was analyzed, the percentage of patients recovering in the "medium" class was higher for bilingual than monolinguals by fair margins for sub-cortical and mixed cortico-subcortical strokes. With respect to gender, bilingual patients present better recovery than monolinguals in both genders, but especially in males. The mean improvement of AQ in low age ( $p = 0.22$ ), high volume ( $p = 0.05$ ), and low AQ ( $p = 0.17$ ) groups were found contrast to monolinguals.  
**Conclusions:** This is, to our knowledge, the first study reporting differences in aphasia recovery between bilingual and monolingual

**ARTICLE HISTORY**  
Received 21 May 2020  
Accepted 2 August 2020

**KEYWORDS**  
Aphasia recovery;  
Bilingualism; stroke

Page 1 / 23





## Fabrication and Performance Evaluation of Industrial Alumina Based Graded Ceramic Substrate for CO<sub>2</sub> Selective Amino Silicate Membrane

Srujan Kumar Shanna, Barun K. Sanfu,<sup>\*</sup> Arati Katare, and Bishwapada Mandal<sup>†</sup>

Cite This: ACS Appl. Mater. Interfaces 2020, 12, 40285–40294


Read Online

ACCESS |

Metric & More

Article Recommendations

**ABSTRACT:** The present study mainly focuses on the careful design of an amino-silicate membrane integrated on an asymmetric graded membrane substrate, comprised of a cost-effective macro-porous industrial alumina based ceramic support with a systematic graded assembly of sol-gel derived  $\gamma$ -alumina intermediate and silica-CTAB sublayer-based multilayered interface, specifically dedicated for the separation of CO<sub>2</sub> gas from the binary gas mixture (CO<sub>2</sub>/N<sub>2</sub>) under nearly identical flue gas atmospheric conditions. The tailor-made industrial  $\alpha$ -alumina-based porous ceramic support has been characterized in terms of apparent porosity, bulk density, flexural strength, microstructural feature, pore size, and its distribution to demonstrate its application feasibility toward the evolution of the subsequent membrane structure. The new surface morphology of the subsequent intermediate and submembrane layer has been carefully controlled via precisely selecting the colloidal chemistry and consequently implementing it during the deposition process of the respective  $\gamma$ -alumina and silica-CTAB precursor sols, whereas the potentiality of the quarantined amine groups in the final amino-silicate



DOI: 10.1021/acsami.0c10000

Activate Windows  
Go to Settings to activate Windows.



Journal - jnsenr071083@gmail.com x (44) Agatha Christie | PDF x x

mail.google.com/mail/u/0/#inbox/FMfmgzGsnLPWtbH9CpfQwhtbKvWlqDh7projector=1

J. Inst. Eng. India Ser. B (August 2020) 101(4):321–333  
https://doi.org/10.1002/ijee.1420-0046-5

ORIGINAL CONTRIBUTION

## Application of Principal Component Analysis for Fault Classification in Transmission Line with Ratio-Based Method and Probabilistic Neural Network: A Comparative Analysis

Alok Mukherjee<sup>1</sup> · Palash Kumar Kundu<sup>2</sup> · Arabinda Das<sup>2</sup>

Received: 4 June 2019 / Accepted: 2 July 2020 / Published online: 17 July 2020  
© The Institution of Engineers (India) 2020

**Abstract** The proposed work illustrates a simple research approach to identify the type of fault in a three-phase overhead single-end-fed long transmission line. Multivariate statistical methods like principal component analysis (PCA) alone, and in combination with probabilistic neural network (PNN), have been applied here to classify fault. An attempt has been made to use the PCA features obtained from the analysis of electrical parameters for each of the faults, in two ways. The first approach of fault classification is based on analyzing the PCA features by a modified ratio-based analysis. In the second method, an attempt has been made to use the PCA features directly to a

**Keywords** Principal component analysis (PCA) · Probabilistic neural network (PNN) · Principal component scores (PCS) · Principal component indices (PCI) · Modified principal component indices (PCMI) · Ratio method

**Introduction**  
Power transmission system, being one of the most expanded overhead networks, is often subjected to various tran-

Journal1.pdf x Show all

12:35 PM  
6/29/2020

Journal - praveer@71053@gmail.com | (44) Agatha Christie | PDF | + X +

mail.google.com/mail/u/0/#inbox/FMfcgrGanLPWbHkpfQwfhbbkVWingDnJfprojecttrr1

APM903,027  
2021, VOL. 35, NO. 8, 1181-1124  
https://doi.org/10.1080/02643758.2020.1913012

**Routledge**  
Taylor & Francis Group

Effect of bilingualism on aphasia recovery

Durjoy Lahiri<sup>a</sup>, Alfredo Ardila<sup>b,c</sup>, Souvik Dubey<sup>d</sup>, Alok Mukherjee<sup>e</sup>, Kingshuk Chatterjee<sup>f</sup> and Biman Kanti Ray<sup>g</sup>

<sup>a</sup>Bangor Institute of Neurosciences, IPGME and SSKM Hospital Kolkata, Kolkata, India; <sup>b</sup>Institute of Linguistics and Intercultural Communication, LMU, Sechenov First Moscow State Medical University, Moscow, Russia; <sup>c</sup>Adelphi University, Miami, FL, USA; <sup>d</sup>Electrical Engineering, Government College of Engineering and Ceramic Technology, Kolkata, India; <sup>e</sup>Computer Science and Engineering, Government College of Engineering and Ceramic Technology, Kolkata, India

**ABSTRACT**  
**Background:** The severity of post-stroke aphasia has also been reported to be less in bilingual patients compared to their monolingual counterparts.  
**Aims:** To analyze the effect of bilingualism on aphasia recovery during the early post-stroke phase.  
**Methods:** Bengali version of Western Aphasia Battery (WAB) was used for language assessment. It was administered during the first week and 90-100 days post-stroke. Severity assessment was done by calculating aphasia quotient (AQ). We enrolled 155 monolingual and 53 bilingual patients with aphasia, of whom 120 monolingual and 43 bilingual participants were followed up.  
**Results:** The probability of recovering was higher for bilinguals than in monolingual patients. When the location of stroke was analyzed, the percentage of patients recovering in the "medium" class was higher for bilingual than monolinguals by fair margins for sub-cortical and mixed cortico-subcortical strokes. With respect to gender, bilingual patients present better recovery than monolinguals in both genders, but especially in males. The mean improvement of AQ in low age ( $p = 0.22$ ), high volume ( $p = 0.05$ ), and low AQ ( $p = 0.17$ ) groups were found to be fairly higher for bilinguals in contrast to monolinguals.  
**Conclusions:** This is, to our knowledge, the first study reporting

**ARTICLE HISTORY**  
Received 21 May 2020  
Accepted 1 August 2020

**KEYWORDS**  
Aphasia recovery;  
bilingualism; stroke

journals.pdf | Show all

12:17 PM  
6/28/2021



ORIGINAL CONTRIBUTION

# Transmission Line Fault Location Using PCA-Based Best-Fit Curve Analysis

Alok Mukherjee<sup>1</sup> · Palash Kumar Kundu<sup>2</sup> · Arabinda Das<sup>3</sup>

Received: 28 May 2020 / Accepted: 29 October 2020 / Published online: 17 November 2020  
© The Institution of Engineers (India) 2020

**Abstract** The paper presents a principal component analysis (PCA)-based method for localization of various power system faults in a 150 km long single side fed transmission line using quarter-cycle pre-fault and half-cycle post-fault sending end line current signals. The proposed work uses fault signals of ten different types of seven intermediate locations along the length of the line to develop three-phase PCA score indices. The localizer model is also designed for practical filament, with fault signals contaminated with power system noise. These seven sets of indices are further used with the best-fit curve fitting method in a noisy environment to develop fault curves. The least square error criteria are followed for determining the fit type.

## Introduction

Fault classification and localization is one of the most frequently researched topics of power system stability and reliability. Large power transmission networks expand over miles under the sky and often are exposed to different atmospheric hazards like storm, snow, rain and many others. These cause minor to severe faults in the transmission lines. Relays and other detection devices provide live fault data regarding voltage, current, frequency, power factor, etc. The objective of the proposed work is to develop a robust protection scheme to localize fault, in

REVIEW PAPER

## Transmission Line Faults in Power System and the Different Algorithms for Identification, Classification and Localization: A Brief Review of Methods

Alok Mukherjee<sup>1</sup> · Palash Kumar Kundu<sup>2</sup> · Arabinda Das<sup>2</sup>

Received: 29 September 2020 / Accepted: 20 December 2020 / Published online: 6 January 2021  
© The Institution of Engineers (India) 2021

**Abstract** Transmission lines are one of the most widely distributed engineering systems meant for transmitting bulk amount of power from one corner of a country to the farthest most in the other directions. The expansion of the lines over different terrains and geographic locations makes these most vulnerable to different kinds of atmospheric calamities which more often develops faults in line. It is imperative to remove the faulty line at the earliest to restrict undue outflow of bulk power through the faulted point as well as restore system stability earliest to resume normal power flow operation. Here lays the importance of having a robust fault identification, classification and localization algorithm which would be successfully able to drive as well as actuate the digital relaying system. Researchers have worked out several methodologies in

literature works would help researchers to take up appropriate techniques for different purposes of transmission line fault analysis.

**Keywords** Transmission line · Fault identification · Fault classification · Fault location

### Introduction

Fault identification, classification and localization have been practiced by scientists with a very high efficiency since very long. People are using diverse topologies and algorithms for serving the same purpose. Long transmission lines are the cheapest and the most efficient modes of



ORIGINAL CONTRIBUTION

## A Differential Signal-Based Fault Classification Scheme Using PCA for Long Transmission Lines

Alak Mukherjee<sup>1</sup> · Palash Kumar Kundu<sup>2</sup> · Arabinda Das<sup>3</sup>

Received: 23 April 2020 / Accepted: 14 December 2020 / Published online: 4 January 2021  
© The Institution of Engineers (India) 2021

**Abstract** Transmission line fault classification is one of the most studied themes of power system analysis and research. This is of utmost importance to isolate the faulted phase for avoiding undue drainage of bulk power during fault. This paper presents a simple and effective method for classification of power system faults in a transmission line using a multivariate statistical method like Principal Component Analysis (PCA). Half-cycle post-fault sending end fault transient current signals are used as the working data for the work, which are normalized, scaled, filtered and finally differentiated. Differentiation of the fault currents is a key method used here in order to highlight particularly the post-fault transient oscillations compared to the retained fault transients. These increased oscillations of

interval of 10 km. Besides, the proposed scheme is made more practical by incorporating power system noise, as well as varying fault inception angle at intervals of 45°, finally to yield an overall classifier accuracy of 99.41%. This, in turn, validates the robustness of the proposed model.

**Keywords** Principal Component Analysis (PCA) · Principal Component Indices (PCIs) · Differential signal · Fault transients · Fault classifier rule base · Fault inception angle (PIA)

### Introduction



ORIGINAL CONTRIBUTION

## Classification and Fast Detection of Transmission Line Faults Using Signal Entropy

Alok Mukherjee<sup>1</sup> · Palash Kumar Kundu<sup>2</sup> · Arabinda Das<sup>2</sup>

Received: 4 July 2020 / Accepted: 1 December 2020 / Published online: 18 January 2021  
© The Institution of Engineers (India) 2021

**Abstract** A simple, prompt and accurate method of fault identification and classification of faults in a long transmission system is presented here using entropy analysis of post-fault three-phase current signals, measured at the sending end only. Identification of the faulted phase is imperative for restricting unwanted outage of power through the faulted phase, as well as isolation of the same in order to retain the stability of the system. Transmission line fault classification, hence, has become one of the most vital topics of research. The high-frequency transient current oscillations, appearing immediately after the fault, are analyzed in this work. Signal entropy is computed for the modified waveform of each phase using the differentiation

of fault using the estimated signal entropy values, thereby aiding in the development of a threshold-based fault classifier entropy signatures. The major findings of the present work are primarily twofold: 100% accuracy of classification and requirement of only (1/20th) of post-fault signal, that is, detection within 1 ms, which is commendably fast compared to several contemporary works. Besides, the variation of fault parameters, such as fault location, fault resistance and power line noise, makes the design more practically suited.

**Keywords** Signal entropy · Entropy window · Differential signal · Fault resistance · Fault classification





ORIGINAL CONTRIBUTION

## Probabilistic Neural Network-Aided Fast Classification of Transmission Line Faults Using Differencing of Current Signal

Abhi Mukherjee<sup>1</sup> · Kingshuk Chatterjee<sup>1</sup> · Palash Kumar Kundu<sup>2</sup> · Aradhita Das<sup>2</sup>

Received: 5 November 2020 / Accepted: 8 March 2021 / Published online: 29 March 2021  
© The Institution of Engineers (India) 2021

**Abstract** Electrical power transmission lines are most vulnerable to different faults due frequent atmospheric hazards. Hence, fault detection and classification are imperative to restrict unwanted power outage by isolation of the faulted line. A probabilistic neural network (PNN)-based fault classification methodology is proposed here. This work uses differencing-based modulated fault signals as input to the PNN architecture to extract fault features in terms of three-phase fault intensity index, which are further analyzed for direct classification of faults aided by a decision tree like study. Simulation of faults has been carried out in practical alike simulation environment with variation of fault location, fault resistance and inductance

**Keywords** Fault classification · PNN · Difference signal · Fault intensity index

### Introduction

Electrical power transmission system is one of the largest and one of widest spread engineering architectures intended for transmitting bulk amount of power from one remote end to the other, or for carrying the generated power to a city nearby location. These lines are spread over miles of different geographic terrains and are often subject to severe atmospheric hazards, leading to transmission line





## Classification and localization of transmission line faults using curve fitting technique with Principal component analysis features

Alok Mukherjee<sup>1</sup> · Palash Kumar Kundu<sup>2</sup> · Arabinda Das<sup>2</sup>

Received: 28 August 2020 / Accepted: 31 March 2021 / Published online: 13 April 2021  
© The Author(s), under exclusive license to Springer-Verlag GmbH Germany, part of Springer Nature 2021

### Abstract

This paper investigates the application of Principal Component Analysis (PCA) for the development of a simple method of classification and localization of power system faults for a 150 km long transmission line. The proposed work uses only a quarter cycle pre-fault and half cycle post-fault receiving end line current signals for fast identification and isolation of the faulty line. This work analyzes current data of ten different fault classes. The fault signals are recorded at fourteen intermediate geometric locations, out of which, three locations are used for developing the PCA-ratio based classifier and a total of six locations are used for developing the localizer model. PCA is applied here to develop PC score indices, based on which, fault signature curve is developed using best fit analogy. This curve works as the key signature of localizer for each class and phase. The work is made more practically suited by incorporating noise in the signals. Thus an effort has been made in the proposed work for developing a complete practical fault diagnosis algorithm with an aim to achieve high level of accuracy both to classify and localize fault. The proposed classifier is found to produce 100% accuracy, and the localizer is found to achieve an average localization error of only 0.1189% for 40 dB SNR and 0.3965% error at a further higher noise level of 25 dB SNR, with less than 4% of maximum error.

**Keywords** Principal component analysis (PCA) · Principal component indices (PCI) · Ratio indices (RI) · Best fit curve analysis · Percentage error

### 1 Introduction

the faulted line. This also helps in preventing damage to the equipments, and most importantly, preventing damage to the



ORIGINAL CONTRIBUTION

## Transmission Line Fault Classification under High Noise in Signal: A Direct PCA-Threshold-Based Approach

Alok Mukherjee<sup>1</sup> · Palash Kumar Kundu<sup>2</sup> · Arabinda Das<sup>2</sup>

Received: 15 November 2020 / Accepted: 17 April 2021 / Published online: 15 June 2021  
© The Institution of Engineers (India) 2021

**Abstract** Transmission line faults are most common in long distance power transmission system. Classification of faults is crucial in removal of the faulted line from supply end in order to discontinue the unwanted flow of power through the fault point. The proposed work illustrates a simple method of classification of faults in transmission line using Principal Component Analysis (PCA) based approach. The proposed method uses to extract fault features in terms of Principal Component Index (PCI), followed by a threshold-based analysis of the PCI values. Development of two threshold values helps in segregating the three different levels of fault disturbance in terms of the PCI values, thereby, developing fault signatures for classification. A 150 km transmission line has been modeled in EMTP for simulating the different fault prototypes, fol-

**Keywords** Principal Component Analysis (PCA) · Principal Component Index (PCI) · Fault classification · Signal to noise ratio (SNR) · Classifier accuracy

### Introduction

Power transmission system is one among the most widespread networks. These transmission lines spread across long distances and go through different terrains. Hence, these are often subject to different faults. Different environmental constraints like storm, snow, ice, etc., often initiate faults in these lines. Several other factors like the presence of different animals, birds as and growing vegetation, weeds and other parts of the trees often cause short

## Entropy-Aided Assessment of Amla (*Emblica officinalis*) Quality Using Principal Component Analysis

Abik Mukherjee<sup>1</sup>, Kingshuk Chatterjee<sup>2</sup>, Tanmay Sarkar<sup>1\*</sup>

<sup>1</sup> Government College of Engineering and Ceramic Technology, Kolkata, India

<sup>2</sup> Malda Polytechnic, West Bengal State Council of Technical Education, Govt. of West Bengal, Malda-732102, India

\* Correspondence: [tanmay60@gmail.com](mailto:tanmay60@gmail.com) (T.S.)

Scopus Author ID: 5720372199

Received: 31.03.2021; Revised: 5.05.2021; Accepted: 8.05.2021; Published: 18.06.2021

**Abstract:** The texture analysis-based scheme for identifying non-consumable amla fruit (*Emblica officinalis*) samples is proposed here. The method uses entropy analysis to detect wrinkles and irregularities developed on the fruit surface with progression in time. Since entropy is one of the major tools used to detect the randomness of data, it is used here to identify these surface irregularities, which are almost absent in fresh samples. Based on these features, the edibility of the samples is predicted. Principal component analysis (PCA) further analyzes these entropy features to enhance the most important directions of variations, followed by a threshold-based segmentation scheme to detect rotten samples. The method possesses less computational burden as it applies PCA and entropy only; it is highly efficient to yield a high detection accuracy of 93.33%; hence, it is easy for real-life implementation.

**Keywords:** multivariate analysis; image analysis; smartphone; food technology; machine vision.

© 2021 by the authors. This article is an open-access article distributed under the terms and conditions of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0/>).

Home > More >

Article

**A Novel Approach towards Microstructure Evaluation of Sintered Ceramic Materials through Image Processing Techniques**

January 2021 - *International Journal of Applied Ceramic Technology* 18(3)  
DOI: [10.1111/ijac.13716](https://doi.org/10.1111/ijac.13716)

Sandipan Chowdhury · Dipika Dhar · Soumit Chowdhury · [Show all authors](#) · T.K. Bhattacharya

Research Interest Score	2.2
Citations	4
Recommendations	0
Reads	95



[Learn about stats on ResearchGate](#)

[Add to PDF](#) Share More

Overview Stats Comments Citations (4) References (4)

Type here to search

2:06 PM 04/20/23

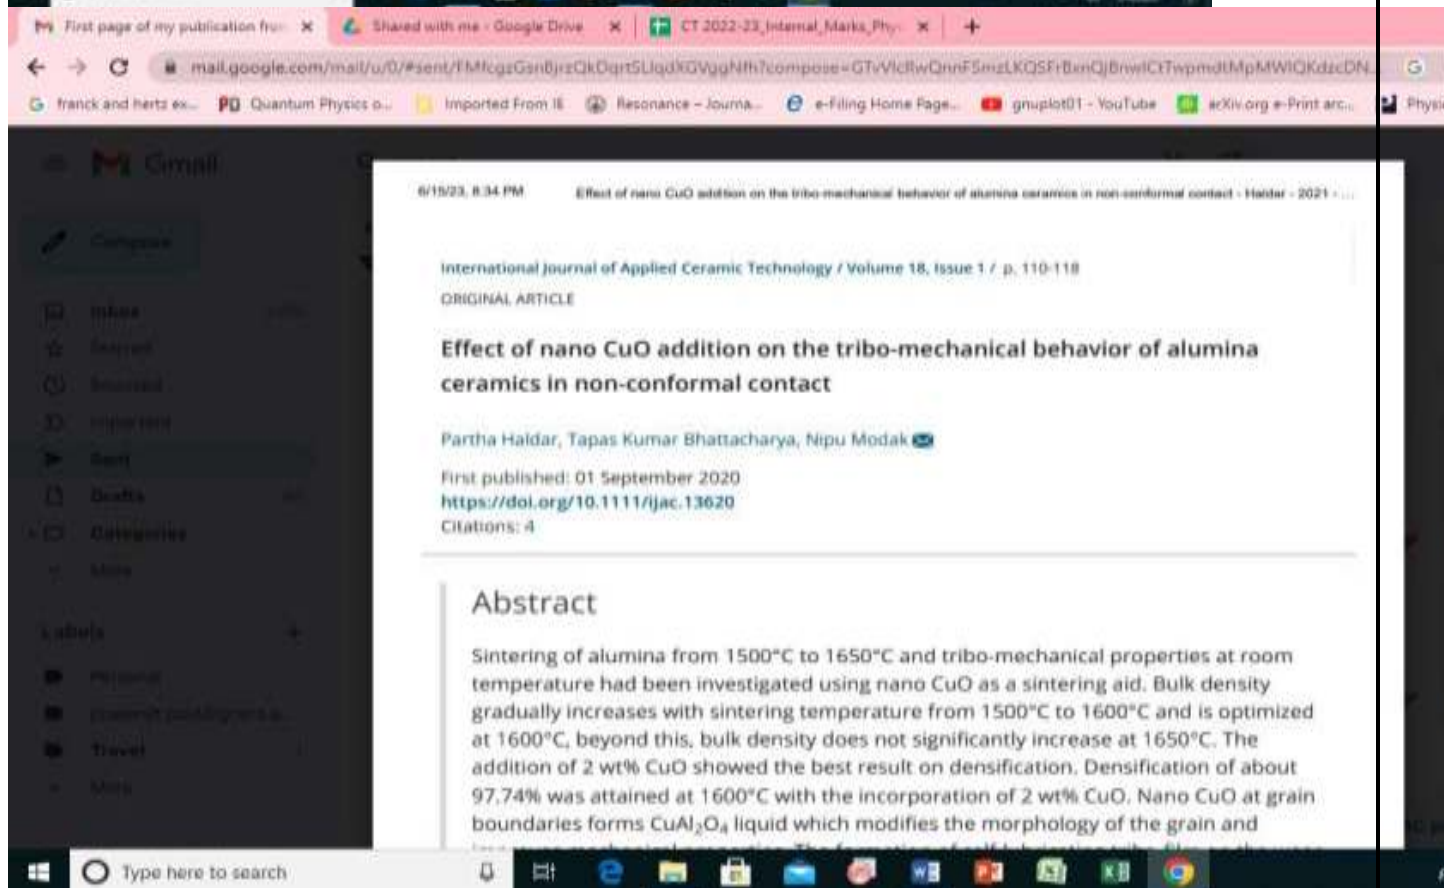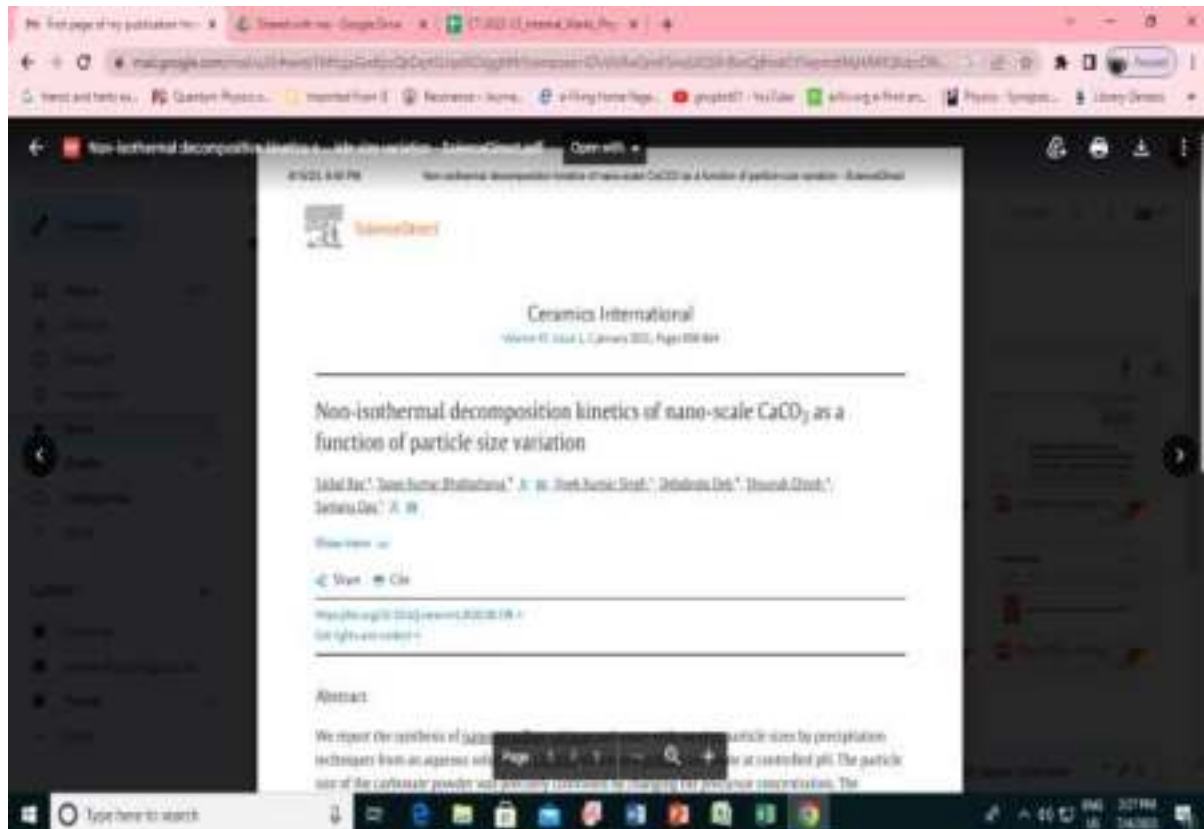



## Cosmological models with variable anisotropic parameter in $f(R, T)$ gravity

B Mishra<sup>1</sup>, F Md Esmail<sup>2</sup> and S Ray<sup>3\*</sup>

<sup>1</sup>Department of Mathematics, Birla Institute of Technology and Science Pilani, Hyderabad Campus, Hyderabad 500078, India

<sup>2</sup>School of Physics, University of Hyderabad, Hyderabad 500046, India

<sup>3</sup>Department of Physics, Government College of Engineering and Ceramic Technology, Kolkata, West Bengal 700 010, India

Received: 26 January 2020 / Accepted: 23 May 2020

**Abstract:** In this article, we present and analyze cosmological models with an anisotropic variable parameter. We have set up the field equations with the space time in the form of Bianchi I metric with an  $f(R, T)$  gravity. The functional form for the  $f(R, T)$  gravity has been assumed to be  $f(R, T) = R + 2f(T)$ , where  $R$  and  $T$  are, respectively, the Ricci scalar and trace of the energy–momentum tensor. Two different models are constructed with respect to the scale factors, such as power law scale factor and hybrid scale factor. Moreover, the anisotropic parameter taken here in the form of hyperbolic function further gives clarity on the behavior of equation of state parameter. It is to note that when the values of the coefficient constant vanish, the model yields the isotropic universe. For both the cases, the deceleration parameter, state finder diagnostic pair and energy conditions have been obtained and analyzed which provide physical plausibility of the models.

**Keywords:** General relativity; Cosmology; Anisotropy; Equation of state; Deceleration parameter

### 1. Introduction

The Einstein field equations (EFE) signify the interplay between matter source and space-time geometry of the universe. Based on the EFE, i.e.,  $G_{\mu\nu} - \frac{1}{2}Rg_{\mu\nu} = \kappa T_{\mu\nu}$ , the presence of energy–momentum distribution has given the clue that the “Space-time commands the matter on its movement and simultaneously matter commands space-time on its curving” [1].

However, besides the success of the theory of general relativity (GR) in several physical aspects, still some astrophysical as well as cosmological issues had not found an appropriate explanation from the GR theory. The observational evidence of late time cosmic acceleration is one of such hidden stories of cosmology among other indescribable phenomena by GR [2]. Modified gravity has been prominent among other alternatives to GR for answering the issue of late time cosmic acceleration. The recent pioneering cosmological observations, viz. Supernova Type Ia (SNIa) [3], Cosmic Microwave Background

(CMB) [4], Baryon Acoustic Oscillation (BAO) [5], Wilkinson Microwave Anisotropy Probe (WMAP) [6] and the most recent Planck collaboration [7], confirm that our present universe not only expands but also goes through the accelerated expanding phase which immediately challenged regarding the viability of GR in the large cosmic scale.

As a result, in recent time plethora of modified theories on gravitation have been proposed. Among all these theories,  $f(R)$  gravity [8–12],  $f(G)$  gravity [13–15],  $f(R, G)$  gravity [16, 17],  $f(T)$  gravity [18–20] and  $f(R, T)$  gravity [21] have received much attention. In these alternative gravity theories, the gravitational Lagrangian density of the Einstein–Hilbert action has been modified by considering generalized functional form of the argument. It is observed that the cosmological models based upon modified gravity theories can easily address to the galactic as well as extra-galactic cosmic dynamics and hence show excellent consistency between the observational dynamics [22–25] and proposed theoretical predictions.

Recently, Harko and collaborators [21] have introduced a new kind of modified theory of gravity under the name  $f(R, T)$  gravity. In various contexts of astrophysics and cosmology, such as thermodynamics [26, 27], energy

\*Corresponding author, E-mail: sarth@iitbh.ac.in

## Analytic radiation model for perfect fluid under homotopy perturbation method

A Aziz<sup>1</sup>, S R Chowdhury<sup>1</sup>, D Deb<sup>1</sup> , S Ray<sup>2,3\*</sup> , F Rahaman<sup>4</sup> and B K Gula<sup>1</sup>

<sup>1</sup>Department of Physics, Indian Institute of Engineering Science and Technology, Shibpur, Howrah, West Bengal 711103, India

<sup>2</sup>Department of Physics, Government College of Engineering and Ceramic Technology, Kolkata, West Bengal 700010, India

<sup>3</sup>Department of Natural Sciences, Maulana Abul Kalam Azad University of Technology, Hatnaghat, West Bengal 741249, India

<sup>4</sup>Department of Mathematics, Jalpaiguri University, Kolkata, West Bengal 700032, India

Received: 24 January 2019 / Accepted: 11 February 2020

**Abstract:** An expression for mass of a spherically symmetric system is obtained by solving the Tolman–Oppenheimer–Volkoff equation, employing the homotopy perturbation method. With the help of this expression and the Einstein field equations, a set of interior solutions is arrived at. Thereafter, different aspects of the solution are explained as regards mass, density, pressure, energy, stability, mass–radius ratio, compactness factor and surface redshift. This analysis shows that all the physical properties, in connection to brown dwarf stars, are valid with the observed features.

**Keywords:** General relativity; Homotopy perturbation method; Compact stars

### 1. Introduction

There has always been a search for the interior solution of the spherically symmetric systems. More than several hundreds of different types of interior solutions have been suggested but so far, very few solutions have made its physical acceptance in all aspects describing the system.

However, in the present paper we have studied a spherically symmetric stellar system under the homotopy perturbation method (HPM) which was introduced and developed by He [1–7] and others [8–12]. This is a series expansion method used in the solution of nonlinear partial differential equations, in the present case the Einstein field equations of general relativity. The method in principle employs a homotopy transform to generate a convergent series solution of differential equations. He [3] advocated in favour of homotopy as well as perturbation technique to solve nonlinear problems. Subsequently, other workers also applied the HPM in various fields of pure and applied mathematics including physics and astrophysics as a new field of application. This has made it possible to solve the

related nonlinear differential equations in an extraordinarily simplified way [13–16].

Rahaman et al. [17] proposed and analysed a model for the existence of strange stars. They predicted a mass function for the ultra dense strange stars. The interpolation technique has been used to estimate the cubic polynomial that yields the following expression for the mass as a function of the radial coordinate  $m(r) = ar^3 - br^2 + cr - d$  with  $a$ ,  $b$ ,  $c$  and  $d$  all being numerical constants. Their analysis is based on the MIT bag model and yields physically valid energy density, radial and transverse pressures.

However, in the above mentioned work of Rahaman et al. [17] the target object was a strange star. In our present investigation, we start with the intention to develop a basic interior solution of the Einstein equations valid for any radiating model under a similar expression for the mass as a function of the radial coordinate, i.e.,  $m(r)$ . Then we match our theoretically obtained solution set with the observational results for practical validity of the model and find that our model is the best fit for the brown dwarf star of ED type. Brown dwarfs [18] are considered as very faint, small in size and low mass ( $M \leq 0.08M_{\odot}$ ) sub-stellar objects mainly composed of hydrogen and helium. It is the mass of a star which helps to maintain hydrostatic equilibrium. A minimum mass ( $\approx 0.08M_{\odot}$ ) is required for stable burning of hydrogen fuel in the core of the star.

\*Corresponding author, E-mail: saibal@associates.iiaee.in

Google Chrome browser window showing the MDPI article page for "Revisiting Primordial Black Hole Evolution".

MDPI logo

Order Article Reports

Open Access Article

### Revisiting Primordial Black Hole Evolution

by Maxim Khlopov <sup>1,2,3,4,5,6,7</sup>, Dipan Pal <sup>4,5,6</sup> and Sibal Ray <sup>5,6,7</sup>

- <sup>1</sup> Moscow Engineering Physics Institute, National Research Nuclear University MEPhI, 115409 Moscow, Russia
- <sup>2</sup> CNRS, Astroparticule et Cosmologie, Université de Paris, F-75013 Paris, France
- <sup>3</sup> Institute of Physics, Southern Federal University, Stachki 194, 344090 Rostov on Don, Russia
- <sup>4</sup> Raibara MMH High School, Raibara, Habra, North 24, Parganas 741234, West Bengal, India
- <sup>5</sup> Department of Physics, Government College of Engineering and Ceramic Technology, Kolkata 700010, West Bengal, India
- <sup>6</sup> Author to whom correspondence should be addressed.
- <sup>7</sup> Current address: Institute of Physics, Southern Federal University, Stachki 194, 344090 Rostov on Don, Russia.

<sup>†</sup> These authors contributed equally to this work.

Axioms 2020, 9(2), 71. <https://doi.org/10.3390/ax9020071>

Received: 30 May 2020 / Revised: 20 June 2020 / Accepted: 23 June 2020 / Published: 25 June 2020

(This article belongs to the Special Issue Theory and Mathematical Aspects of Black Holes)

Download Browse Figures View Pre-proof

axioms-9-1.pdf axioms-9-1.pdf axioms-9-1.pdf Show all X

Windows taskbar: 19:52 27-05-2021



World Scientific  
Connecting Great Minds

International Journal of Modern Physics D | Vol. 29, No. 05, 2020004 (2020)  
| Review Paper

# Gravastar: An alternative to black hole


Satish Ray, Bikpratik Sengupta, and Himanshu Nimesh

<https://doi.org/10.1142/S0218271820300049> | Cited by: 22

PDF/EPUB | Tools | Share | Recommend To Library

## Abstract

In this work, we review thoroughly the origin, development and present status of gravastar which has been thought to be an alternative to black hole along with its future contribution in the sense of astrophysical observation. The Mott's theory model of the

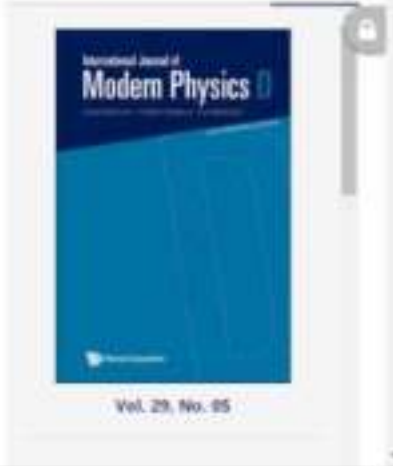

Next >

2020 27-05-2021

Google Chrome browser window showing a SpringerLink article page. The address bar displays the URL: [link.springer.com/article/10.1140/epjc/s10052-020-7725-0](https://link.springer.com/article/10.1140/epjc/s10052-020-7725-0). The page title is "Anisotropic strange star with Tolman–Kuchowicz metric under  $f(R, T)$  gravity". The authors listed are Suparna Biswas, Dibyendu Shee, B. K. Guba, and Sabal Bag. The article is published in *The European Physical Journal C*, volume 80, article number 175 (2020). It has 1213 accesses, 50 citations, and 1 altmetric. The abstract states: "In the current article, we study anisotropic spherically symmetric strange star under the background of  $f(R, T)$  gravity using the metric potentials of Tolman–Kuchowicz type (Tolman in *Phys Rev* 55:364, 1939; Kuchowicz in *Acta Phys Pol* 33:541, 1968) as  $\lambda(r) = \ln(1 + ar^2 + br^4)$  and". The right sidebar contains a "Download PDF" button, a "Working on a manuscript?" notice, and a table of contents with sections: Abstract, Introduction, Mathematics behind  $f(R, T)$  gravity, Solution of Einstein's field equations, and Stationary conditions. The Windows taskbar at the bottom shows the date and time as 2:06 PM on 27-05-2021.

ScienceDirect

View PDF Download full issue

Outline

Abstract

1. Introduction

2. Basic mathematical formalism...

3. The field equations in  $f(T)$  gr...

4. The solutions of the field equa...

5. Junction condition

6. Physical features of gravastar ...

7. Discussion on the status of the...

8. Conclusion

Declaration of Competing Interest

Acknowledgements

References

 Nuclear Physics B  
Volume 919, May 2020, 114989



## Study of gravastars under $f(T)$ gravity

Amit Das,<sup>a</sup> Shantanu Ghosh,<sup>a</sup> Debabrata Deb,<sup>b</sup> Farooq Rahaman,<sup>c</sup> Sabir Ray,<sup>d</sup> &

Show more

+ Add to Mendeley Share Cite

<https://doi.org/10.1016/j.nuclphysb.2020.114989> Get rights and content >

Under a Creative Commons license >  open access

Recommended articles

Embedding class-1 anisotropic solution in ...  
Chinese Journal of Physics, Volume ...  
M. Sherif, Saadia Saba  
Purchase PDF

Anisotropic quark stars in Einstein-Gauss-Bonnet...  
Physics Letters B, Volume 819, 2021...  
Tolul Tanginmi, ... Ayen Banerjee  
View PDF

Stellar structures in  $f(R)$  gravity with Tolman...  
Physics of the Dark Universe, Vola...  
M. Farooq Shami, Saadia Saba  
FEEDBACK

an0200-1.pdf an0200.pdf m0200-1.pdf Show all

1957 27-05-2021

World Scientific  
Connecting Great Minds

International Journal of Modern Physics A | Vol. 35, No. 04, 2020017 (2020)  
| Research Papers

# Gravastars in $f(T, \mathcal{F})$ gravity


Shounak Ghosh, A. D. Ranfor, Amit Das, M. J. S. Houndjo, Ines G. Salako, and Saibal Ray

<https://doi.org/10.1142/S0217751X20500177> | Cited by: 26

PDF/EPUB   Tools   Share   Recommend To Library

## Abstract

We propose a stellar model under the  $f(T, \mathcal{F})$  gravity following Mazur-Mottola's conjecture<sup>1,2</sup> known as gravastar which is generally believed as a viable alternative to black hole. The compact objects of these systems are  $f(T, \mathcal{F})$  gravastars.

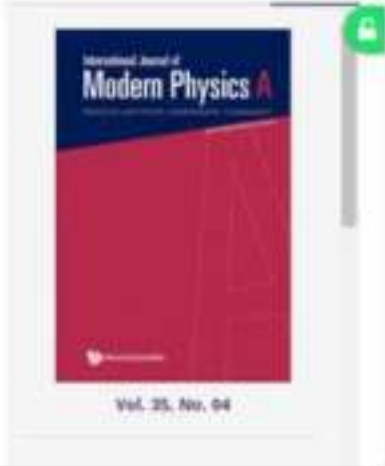

International Journal of  
**Modern Physics A**  
Vol. 35, No. 04

Tasker   References   Related   Details

an20010-1.pdf   an20010.pdf   moma2020-1.pdf   Show all

13:58  
27-05-2021

Accepted Manuscript

International Journal of Modern Physics D

Article Title: Anisotropic strange star inspired by Finsler geometry  
Author(s): Sourav Roy Chowdhury, Debabrata Deb, Farook Rahaman, Saibal Ray,  
B. K. Guha  
DOI: 10.1142/S0218271820500017  
Received: 03 October 2019  
Accepted: 18 October 2019  
To be cited as: Sourav Roy Chowdhury *et al.*, Anisotropic strange star inspired by  
Finsler geometry, *International Journal of Modern Physics D*, doi:  
10.1142/S0218271820500017  
Link to final version: <https://doi.org/10.1142/S0218271820500017>

This is an unedited version of the accepted manuscript scheduled for publication. It has been uploaded in advance for the benefit of our customers. The manuscript will be copyedited, typeset and proofread before it is released in the final form. As a result, the published copy may differ from the unedited version. Readers should obtain the final version from the above link when it is published. The authors are responsible for the content of this Accepted Article.

## Charged perfect fluid sphere in higher-dimensional spacetime

P Bhar<sup>1,2</sup>, T Manna<sup>1,2</sup>, F Rahman<sup>2,3</sup>, S Ray<sup>2,4,5</sup>  and G S Khadekar<sup>2,6</sup>

<sup>1</sup>Department of Mathematics, Government General Degree College, Singur, Hooghly, West Bengal 712409, India

<sup>2</sup>Department of Mathematics and Statistics, St. Xavier's College, 30 Mother Teresa Sarani, Kolkata, West Bengal 700016, India

<sup>3</sup>Department of Mathematics, Jadavpur University, Kolkata, West Bengal 700032, India

<sup>4</sup>Department of Physics, Government College of Engineering and Ceramic Technology, Kolkata, West Bengal 700010, India

<sup>5</sup>Department of Natural Sciences, Maulana Abul Kalam Azad University of Technology, Haringhata, West Bengal 741249, India

<sup>6</sup>Department of Mathematics, R.T.M. Nagpur University, Mahatma Jyotiba Phule Educational Campus, Aravali Road, Nagpur, Maharashtra 440033, India

Received: 17 January 2019 / Accepted: 23 July 2019

**Abstract:** In the present paper, a new model for perfect fluid sphere filled with charge, in higher-dimensional spacetime, admitting conformal symmetry has been investigated. We have considered a linear equation of state, with coefficients fixed by the matching conditions, at the boundary of the source corresponding to the exterior Reissner–Nordström higher-dimensional spacetime. Several physical features for different dimensions, starting from four up to eleven, have been briefly discussed. It has been shown that all the features as obtained from the present model are physically desirable.

**Keywords:** General relativity; Equation of state; Higher dimension; Compact star

**PACS Nos.:** 04.40.Nr; 04.20.Cv; 04.20.Jh

### 1. Introduction

With the recent advancement in superstring theory, in which the spacetime is considered to be of dimensions higher than four, studies in higher-dimensional spacetime have attained tremendous importance. The higher-dimensional models provide a stand to realize the nature of the early universe. In the early stages, the universe was dense and hot. This scenario is better explained in higher dimensions. It is believed that during the expansion the extra dimensions have compactified to yield the current four-dimensional universe. Throughout the last decade, a number of articles have been published in this subject in both localized and cosmological domains. It is a common trend to believe that the four-dimensional present spacetime structure is the self-compactified form of manifold with multi-dimensions. Therefore, it is argued that theories of unification tend to require extra spatial dimensions to be

consistent with the physically acceptable models [1–6]. It has been shown that some features of higher-dimensional black holes differ significantly from four-dimensional black holes as higher dimensions allow for a much richer landscape of black hole solutions that do not have four-dimensional counterparts [7]. Some recent higher-dimensional works admitting one parameter group of conformal motion can be seen in the following Refs. [8, 9].

Recently, the models for charged fluids that describe the ultra-compact astrophysical objects have been studied extensively. These solutions describe charged compact objects that are well-matched with known stars. As a result, it is argued that the Einstein–Maxwell field equations have many applications in modeling the stars. It is observed that a fluid sphere of uniform density with a net surface charge becomes more stable than without charge [10]. According to Krasinski [11] in the presence of charge, the gravitational collapse of a spherically symmetric distribution of matter to a point singularity may be avoided. Sharma et al. [12] argued that in this situation the repulsive Coulombian force counterbalances the gravitational attraction in addition to the pressure gradient. Charged perfect fluid sphere satisfying a

\*Corresponding author. E-mail: saibal@associates.icaa.in

The image shows a screenshot of a web browser displaying a research paper on the World Scientific website. The browser's address bar shows the URL: [worldscientific.com/doi/10.1142/S0218271820500273](https://www.worldscientific.com/doi/10.1142/S0218271820500273). The page header includes the World Scientific logo and navigation links such as "Subject", "Journals", "Books", "Major Reference Works", "Resources For Partners", "Open Access", "About Us", and "Help".

The article title is "Weyl transformation: A dynamical degree of freedom in the light of Dirac's Large Number hypothesis", published in the "International Journal of Modern Physics D", Vol. 29, No. 03, 2050027 (2020). The authors listed are Prasangi Paul, Ritpratik Sengupta, and Saibal Ray. The page includes a "Research Paper" label, a "No Access" status, and a "Cited by: 1" count. Navigation options include "Previous" and "Next".

Below the title, there are buttons for "PDF/EPUB", "Tools", "Share", and "Recommend To Library". An abstract section is visible at the bottom left. On the right side, there is a thumbnail image of the journal cover for "International Journal of Modern Physics D", Vol. 29, No. 03. The Windows taskbar at the bottom shows the system tray with the date and time: 10:17, 29-05-2021.

The image shows a screenshot of a web browser displaying a journal article page from World Scientific. The browser's address bar shows the URL [www.worldscientific.com/doi/10.1142/S0218271819410062](http://www.worldscientific.com/doi/10.1142/S0218271819410062). The page header includes the World Scientific logo and navigation links for Subject, Journals, Books, Major Reference Works, Resources For Partners, Open Access, About Us, and Help. The article title is "Constraining values of bag constant for strange star candidates" by Abdul Aziz, Saibal Ray, Farook Rahaman, M. Khlopov, and B. K. Guha. The article is part of the "International Journal of Modern Physics D", Vol. 28, No. 13, 1941006 (2018). The page also features a "PDF/EPUB" button, "Tools", "Share", and "Recommend To Library" options. A thumbnail of the journal cover is visible on the right side. The Windows taskbar at the bottom shows the system tray with the date and time as 10:23 on 26-05-2023.

World Scientific  
Connecting Great Minds

Search My Cart Sign In

Subject Journals Books Major Reference Works Resources For Partners Open Access About Us Help

International Journal of Modern Physics D | Vol. 28, No. 13, 1941006 (2018) Full Access

## Constraining values of bag constant for strange star candidates

Abdul Aziz, Saibal Ray, Farook Rahaman, M. Khlopov, and B. K. Guha

<http://www.org/10.1142/S0218271819410062> | Cited by: 33

Previous Next

This article is part of the issue:  
SPECIAL ISSUE: New Trends in Particle Physics and Astrophysics  
Editor: M. Yu. Khlopov

PDF/EPUB Tools Share Recommend To Library

International Journal of Modern Physics D  
Vol. 28, No. 13

20.1007/112646-0L...pdf 10.1142/S02182718...pdf 10.1142/S02182718...pdf Show all X

10:23 26-05-2023



ScienceDirect

Access through your Institution Purchase PDF

Article preview  
Abstract  
Introduction  
Section snippets  
References (122)  
Cited by (24)  
Recommended articles (6)

**Annals of Physics**  
Volume 436, October 2019, 167965

**Relativistic strange stars in Tolman–Kuchowicz spacetime**

Suparna Biswas,<sup>a</sup> Dibyendu Shee,<sup>b</sup> Saibal Barua,<sup>b,1</sup> F. Rahaman,<sup>c</sup> B.K. Guha,<sup>a</sup>

Show more

+ Add to Mendeley Share Cite

<https://doi.org/10.1016/j.aop.2019.05.004> Get rights and content

Abstract

FEEDBACK

20.1007/978-94-007-1264-6-OL.pdf 10.1007/978-94-007-1264-6-OL.pdf 10.1016/0378-4275...pdf Show all

10:31 20-05-2021

ScienceDirect

View PDF Download full issue

Outline

- Abstract
- Keywords
- Introduction
- The Einstein spacetime geometry...
- Gravastar condition
- Some physical feature of the shel...
- Junction condition and equation ...
- Observational status of gravastars
- Discussion and conclusion
- Acknowledgments
- Supplementary data
- Research Data

Results in Physics  
Volume 14, September 2020, 102473

## Gravastars with Kuchowicz metric potential

Shounak Ghosh<sup>a</sup>, Dibyendu Saha<sup>a</sup>, Sibal Ray<sup>a,\*</sup>, E. Bahar<sup>a</sup>, B.K. Guha<sup>a</sup>

Show more

+ Add to Mendeley Share Cite

<https://doi.org/10.1016/j.rinp.2018.282473> Get rights and content

Under a Creative Commons license open access

Recommended articles

- Decoupled anisotropic spheres in self-interacting...  
Chinese Journal of Physics, Volume ...  
M. Sharif, Arsal Maqid  
Purchase PDF
- Gravitational collapse for anisotropic radiating star...  
Chinese Journal of Physics, Volume ...  
Raz Ahmed, ... Erkan Gözdağ  
Purchase PDF
- Realistic solutions of fluid spheres in  $f(R, \mathcal{F})$  Gravit...  
Annals of Physics, Volume 411, 202...  
S. Mustafa, ... M. Parvaz Shami  
Purchase PDF

FEEDBACK

10.1007/s12668-01...pdf 10.1007/s12668-...pdf 10.1016/j.rinp.20182738...pdf Show all

10:25 28-05-2021

ScienceDirect

Access through your Institution Purchase PDF

Article preview  
Abstract  
Introduction  
Section snippets  
References (64)  
Cited by (27)  
Recommended articles (6)

 **Annals of Physics**  
Volume 411, December 2019, 167968

**Gravastars in (3 + 1) dimensions admitting Karmarkar condition**

Shourak Ghosh<sup>\*</sup>, Suparna Bhattacharya<sup>\*</sup>, Farook Baharman<sup>\*</sup>,  
B.K. Guha<sup>\*</sup>, Subal Ray<sup>\*\*</sup>

Show more

+ Add to Mendeley Share Cite

<https://doi.org/10.1016/j.aop.2019.167968> Get rights and content

Abstract

FEEDBACK


1217  
29.05.2021



ScienceDirect

Access through your Institution Purchase PDF

Article preview  
Abstract  
Introduction  
Section snippets  
References (68)  
Cited by (3)  
Recommended articles (6)

 **Annals of Physics**  
Volume 438, October 2018, 167918

**Neutron star under homotopy perturbation method**

Abdul Aziz<sup>a</sup>, Seibal Ray<sup>a,\*</sup>, G. S. Carrick-Bahaman<sup>a</sup>, B. S. Guha<sup>a</sup>

Show more

+ Add to Mendeley Share Cite

<https://doi.org/10.1016/j.aop.2018.10.7918> Get rights and content

**Abstract**

We obtain a mass function solving the Tolman-

FEEDBACK

12:20 29-05-2021

World Scientific  
Connecting Great Minds

International Journal of Modern Physics D | Vol. 28, No. 06, 1950116 (2018)  
Research Paper

# A study of anisotropic compact stars based on embedding class 1 condition

S. K. Maurya, Debiabrata Detti, Saibal Ray, and P. K. S. Kundtlig

<https://doi.org/10.1142/S02182718181950116> | Cited by: 12


< Previous      Next >

PDF/EPUB      Tools      Share      Recommend To Library

## Abstract

This paper discusses a generalized model for compact stars, assumed to be anisotropic in nature due to the presence of highly dense and ultra-relativistic matter distribution. After embedding the 4D Riemannian space locally and isometrically into a 5D pseudo-

Figures      References      Related      Details

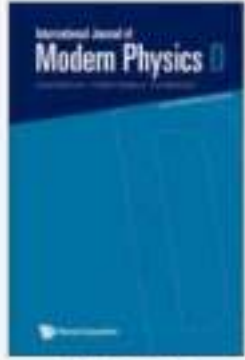

International Journal of  
Modern Physics D  
Vol. 28, No. 09

Metrics

12:13  
29-05-2023

World Scientific  
Connecting Great Minds

Search My Cart Sign In

Subject Journals Books Major Reference Works Resources For Partners Open Access About Us Help

International Journal of Modern Physics D | Vol. 28, No. 13, 1941010 (2018) Full Access

# Inflation in anisotropic brane universe using tachyon field

Ritpratik Sengupta, Prasanta Paul, Bhabu Chandra Paul, and Saikat Ray

[https://www.org/10.1142/S0218271819410104](https://www.worldscientific.com/doi/10.1142/S0218271819410104) | Cited by: 5

Previous Next

This article is part of the issue:  
SPECIAL ISSUE: New Trends in Particle Physics and Astrophysics  
Editor: M. Yu. Khlopov

PDF/EPUB Tools Share Recommend To Library

Abstract

International Journal of Modern Physics D  
Vol. 28, No. 13

Metrics

12:17 29-05-2023

## Study on charged strange stars in $f(R, T)$ gravity

Debabrata Deb,<sup>a</sup> Sergei V. Ketov,<sup>b,c,d</sup> Maxim Khlopov<sup>e-f,g</sup> and Saibal Ray<sup>h,1</sup>

<sup>a</sup>Department of Physics, Indian Institute of Engineering Science and Technology, Shibpur, Howrah 711103, West Bengal, India

<sup>b</sup>Department of Physics, Tokyo Metropolitan University, 1-1 Minami-ohsawa, Hachioji-shi, Tokyo 192-0397, Japan

<sup>c</sup>Research School of High-Energy Physics, Tomsk Polytechnic University, 2a Lenin Avenue, Tomsk 634050, Russian Federation

<sup>d</sup>Kavli Institute for the Physics and Mathematics of the Universe (WPI), University of Tokyo, Kashiwa 277-8583, Japan

<sup>e</sup>APC Laboratory 10, rue Alice Domon et Léonie Duquet, 75205 Paris Cedex 13, France

<sup>f</sup>Institute of Physics, Southern Federal University, 194 Stachki, Rostov-on-Don 344090, Russian Federation

<sup>g</sup>National Research Nuclear University "MEPHI" (Moscow Engineering Physics Institute), Moscow 115409, Russia

<sup>h</sup>Department of Physics, Government College of Engineering and Ceramic Technology, Kolkata 700010, West Bengal, India

E-mail: [ddeb.rs2016@physics.iests.co.in](mailto:ddeb.rs2016@physics.iests.co.in), [ketov@tmu.ac.jp](mailto:ketov@tmu.ac.jp), [khlopov@apc.in2p3.fr](mailto:khlopov@apc.in2p3.fr), [saibal@associates.iceaa.in](mailto:saibal@associates.iceaa.in)

Received August 30, 2019

Accepted October 17, 2019

Published October 29, 2019

---

<sup>1</sup>Corresponding author.

World Scientific  
Connecting Great Minds

Subject Journals Books Major Reference Works Resources For Partners Open Access About Us Help

International Journal of Modern Physics D | Vol. 28, No. 06, 1950116 (2018)  
Research Paper

# A study of anisotropic compact stars based on embedding class 1 condition

S. K. Maurya, Debiabrata Dey, Saibal Ray, and P. K. S. Kundtlig


<https://doi.org/10.1142/S02182718181950116> | Cited by: 12

< Previous Next >

PDF/EPUB Tools Share Recommend To Library

## Abstract

This paper discusses a generalized model for compact stars, assumed to be anisotropic

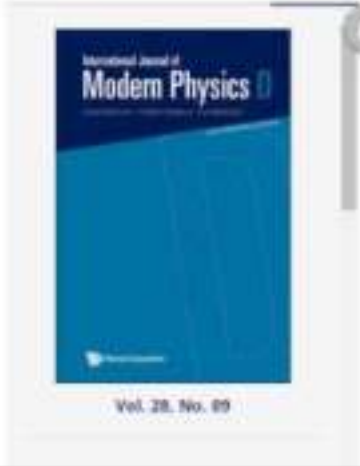

10.1088/2475-7518...pdf 10.1088/2475-7518...pdf Show all X

13:18 29-05-2023



# Multi-Phase Digital Authentication of e-Certificate with Secure Concealment of Multiple Secret Copyright Signatures

Soumit Chowdhury, Soumi Mishra, Nabia Ghoshal

**Abstract:** The work suggests a unique data security protocol for trusted online validation of e-documents like university certificates to confirm its credibility on different aspects. The idea reliably validates such e-documents from both the issuing authority and incumbent perspectives by strongly complying the security challenges like authentication, confidentiality, integrity and non-repudiations. At the very beginning, the parent institute physically issues the client copyright signature to the incumbent and stores this signature and biometric fingerprint of the incumbent on the server database. Additionally, the server secretly fabricates ownership signatures of parent institute and concern officer both within the e-document and this certified e-document is kept on the server database. Importantly, these signature fabrications are governed by self-defined hash computations on incumbent registration and certificate number respectively. Next, the server transmits this signed e-document to the client after a successful login by the client. Now client conceals shared copyright signature and takes thumb impression of the incumbent separately within this received e-document. Critically, these client-side signature castings are employed through self-defined hash computations on the incumbent name and obtained marks respectively. Finally, this authenticated e-document is validated at the server end by sensing all authentic signatures from it through those same identical hash operations. For stronger authenticity each signature is concealed by tracing its valid or authentic circular orientation of fragment sequences and embedding locations both derived from respective hash operations. Also, each signature is dispersed in non-overlapping manners on each separate region of the e-document promoting better signature recovery. Additional robustness is further injected with variable encoding of signature bits on different transformed pixel byte components of the e-Certificate image. Overall, the scheme confirms significant performance enhancements over existing approaches with exhaustive simulation results on image data hiding aspects and their standardized comparisons.

**Index Terms:** e-Certificate Authentication, Hash-Based Validation, Multi-Signature Fabrication, Variable Encoding

Revised Manuscript Received on August 05, 2019

Soumit Chowdhury, Department of Computer Science and Engineering, Government College of Engineering & Ceramic Technology, Kolkata, India. (Corresponding Author)

Soumi Mishra, Department of Computer Science and Engineering, Government College of Engineering & Ceramic Technology, Kolkata, India.  
Nabia Ghoshal, Department of Engineering & Technological Studies (DETS), University of Kalyani, West Bengal, India.

Revised Number: IJITEE2019080101  
DOI: 10.22940/ijitee.IJITEE19080101

3365

Published By:  
Blue Eyes Intelligence Engineering  
& Sciences Publication



## I. INTRODUCTION

Rapid growth of digital data communication in recent time has urged the need for validation cum authentication of such digital documents in order to ensure trusted data transmission. In this aspect secret fabrication of some copyright signature on the concern e-document is the traditional practice to achieve ownership claims. This idea is mainly implemented through digital watermarking concepts where presence of such secretly fabricated signatures will remain unknown to the unauthorized recipients. Further, all these secretly embedded signatures also required to be protected from different external image processing attacks. Hence these approaches are quite useful for authenticating vital digital documents existing in the form of images such as e-certificates. Importantly this practice will be quite useful for online validation of such e-documents which are needed for the purpose of third-party verification. So, to emphasis this issue the proposed work designs a unique data security protocol for validation cum authentication of such e-documents and the main objective of this scheme are-

1. Achieving ownership claims for such e-documents from both the issuing authority and the candidate perspectives.
2. Data validation for the e-certificate using hash value-based signature fabrication concept which is performed on all the critical e-certificate data.
3. Complying critical data security issues like authentication, confidentiality, integrity, Non-repudiations.
4. Incorporation of secure data hiding techniques for signature fabrications using variable encoding of secret signature bits.

The vital issue here is that most of the existing works have actually focused such e-document authentications only by utilizing the idea of ownership claims. However, a digital document validation is a bigger issue where the authenticity of the whole document is important and, in this aspect, the existing works in this domain are highlighted further.

To depict the utility of these proposed concepts the paper is organized as follows- next sec. II discusses the existing works, followed by enhancements in sec. III.

Zener-like electrical transport in polyaniline–  
graphene oxide nanocompositesAnimesh K. Dey,<sup>a</sup> Gaurav Kumar,<sup>b</sup> Pradipto K. Maji,<sup>c</sup> R. K. Chakrabarti<sup>a</sup>  
and U. N. Nandi<sup>a\*</sup>

On the RSC Adv., 2023, 15, 4733

The present study includes the fabrication and characterization and an investigation of the electrical transport properties of nanocomposites of *p*-PANI and graphene oxide (GO). The samples were prepared by loading different weight percentages (*D*) of GO during the chemical oxidative *in situ* polymerization of aniline monomers. Structural characterization by IRD, FTIR, TGA, TSEM, etc. confirmed that the nanocomposites exhibited superior morphology and thermal stability. The transport properties were studied by measuring the variation of conductivity with temperature *T*, *V*-*I* characteristics and the fundamental response *V<sub>b</sub>* at different temperatures *T*. The dc conductance *G* showed a transition from insulator type behavior to weakly temperature dependent behavior at temperature *T<sub>0</sub>*, which decreased with increasing *D*. The *V*-*I* characteristics were generally nonlinear and the nonlinearity increased with decreasing temperature. However, at temperatures *T* < *T<sub>0</sub>*, the characteristics showed saturation of voltage for higher values of current, similar to Zener diodes. At lower temperatures (*T* < *T<sub>0</sub>*) a voltage maximum occurred, similar to thyristors. This behavior leads to the possibility of fabricating devices containing these nanocomposites. We have tried to analyze these results using the framework of scaling theory and the concept of inter-chain hopping conduction and tunnelling between conducting grains separated by insulating regimes in the nanocomposites.

Received 20th September 2023  
Accepted 20th December 2023

DOI: 10.1039/d3ra07021c

rsc.li/rsc-advances

## Introduction

Polyaniline (PANI) is one of the most studied organic polymers in materials science.<sup>1,2</sup> PANI exhibits exceptional physico-chemical properties such as flexibility, solution processability and tunable conductivity on undergoing reversible doping processes. Greater chemical and environmental stability, ease of synthesis and the large-scale availability of low cost monomers<sup>3</sup> make this polymer a good candidate for the development of functional carbon based polymer composites and the fabrication of numerous technological devices such as supercapacitors,<sup>4,5</sup> sensors,<sup>6,7</sup> electronic devices,<sup>8</sup> batteries<sup>9,10</sup> and light emitting diodes.<sup>11</sup> This polymer is available in three distinct oxidation states:<sup>12</sup> the fully reduced leucoemeraldine base (LB) [-(C<sub>6</sub>H<sub>4</sub>NH)<sub>*n*</sub>]-, the half-oxidized emeraldine base (EB) [-(C<sub>6</sub>H<sub>4</sub>NH)<sub>*n*</sub>]- and the fully oxidized pernigraniline base (PNB) [-(C<sub>6</sub>H<sub>2</sub>N)<sub>*n*</sub>]-. Both LB and EB are insulators with a large extrinsic gap *E<sub>g</sub>* ~ 3.6 eV whereas PNB possesses an energy gap *E<sub>g</sub>* ~ 1.4 eV and shows conducting properties due to electron-phonon interactions.<sup>13</sup> The conducting emeraldine

base (EB) form of the polymer is achieved upon protonation of LB by exposure to protons acids or upon oxidative doping of LB. This EB state is composed of two benzenoid units and one quinoid unit that alternate and is regarded as the most useful form of polyaniline with semiconducting properties. This intrinsically conducting property<sup>14</sup> of the EB state of the polymer attracts researchers to explore its outstanding electrical, magnetic, electro-chemical, thermo-electrical, and optical properties.

In order to achieve superior electrical, thermal and mechanical properties to the corresponding component materials, various nanofillers such as sulfuric sulfuric acid,<sup>15</sup> graphene,<sup>16,17</sup> carbon nanotubes,<sup>18,19</sup> graphene oxide,<sup>20,21</sup> and reduced graphene oxide<sup>22,23</sup> have been added to PANI to fabricate innovative polyaniline nanocomposites of significant technological and scientific importance. Out of these carbon based materials, graphene oxide (GO) is extensively used as a filler in PANI because of its higher chemical stability, the easy availability of a low cost precursor (natural graphite), and the greater feasibility of large-scale production. Further, GO has structural advantages in which the edges are decorated with tunable polar oxygen-containing hydrophilic functional groups such as hydroxyl groups, carboxyl groups and epoxides.<sup>24</sup> These functional groups exhibit strong interfacial interactions with polar molecules and polymers resulting in intercalated or exfoliated GO-based polymer nanocomposites.<sup>25,26</sup> Moreover, the thermal stability of these nanocomposites is enhanced to a greater extent due to

<sup>a</sup>Department of Physics, Scottish Church College, 1 & 2 Chatterjee Avenue, Kolkata 700 031, India. E-mail: an\_nandi@sccl.ac.in<sup>b</sup>Department of Polymer and Process Engineering, Indian Institute of Technology Kharagpur, India<sup>c</sup>Department of Physics, Government College of Women, Engineering and Technology, Kolkata 700 015, India



## Nonlinearity exponent: A phase sensitive parameter in disordered systems

Animesh Kr. Dey<sup>a</sup>, U.N. Nandi<sup>b,\*</sup>, Pradipto K. Maji<sup>b</sup>, R.K. Chakrabarty<sup>c</sup>

<sup>a</sup> Department of Physics, Indian Church College, 1 & 2, Upper Bari, Kolkata 700 006, India

<sup>b</sup> Department of Polymer and Process Engineering, Indian Institute of Technology Kharagpur, India

<sup>c</sup> Department of Physics, Government College of Ocean Engineering and Technology, Kolkata 700 003, India

### ARTICLE INFO

#### Keywords

Disordered systems  
Onset frequency  
Onset exponent  
Phase sensitive character  
Scaling and nonlinearity exponent

### ABSTRACT

The real part of alternating current conductance  $\Sigma(X, f)$  of disordered system shows nonOhmic behavior characterized by the existence of an onset frequency  $f_c(X)$  below which  $\Sigma(X, f)$  remains its Ohmic value  $\Sigma_0$  but increases monotonically with frequency above  $f_c(X)$ .  $f_c(X)$  scales with  $\Sigma_0$  as  $f_c(X) \sim \Sigma_0^\nu(X)/T^\nu$  with  $\nu_c$  as the nonlinearity exponent. By analyzing such experimental data of AC-conductance varied by temperature and disorder in a wide variety of disordered systems, we show that  $\nu_c$  has different values at different phases of a disordered system and can be used to identify the existence of different phases exhibited by such systems. Experimental results of nonOhmic conduction, existence of onset frequency  $f_c(X)$ , and the role of the onset exponent  $\nu_c$  in identifying various phases of disordered systems are systematically analyzed within the framework of scaling formalism and explained with intra-chain conduction and tunneling between conducting grains separated by insulating regions.

### 1. Introduction

The real part of alternating current conductance  $\Sigma(X, f)$  of a disordered system is a function of several physical variables like disorder  $D$ , amplitude of ac voltage  $V$ , temperature  $T$ , frequency  $f$ , and magnetic field  $H$  [1]. This leads to the possibility that  $\Sigma(X, f)$  can be investigated by various measuring paths expressed by the symbol  $\Sigma(X, Y)$  [2–3]. This signifies that conductance  $\Sigma(X, f)$  is varied by the parameter  $X$  keeping  $f$  close to zero (then gives rise to Ohmic conductance  $\Sigma(X, 0) \sim \Sigma_0(X) = \Sigma_0$ ) and pushed as a function of frequency  $f$ . Except  $f$ ,  $X$  may be  $D, V, T, f$ , and  $H$ . Such measuring paths indicate that conductance of a disordered system exhibits nonOhmic character (i.e.  $\Sigma(X, f)$  remains constant in its Ohmic counterpart  $\Sigma_0$  up to a certain value of  $f$ , known as the onset or critical frequency  $f_c(X)$  [4]. Beyond  $f_c(X)$ ,  $\Sigma(X, f)$  deviates from  $\Sigma_0$  and increases monotonically with  $f$  as may even increase at higher value of  $f$  [4].

Investigation of  $\Sigma(X, f)$  in a wide variety of disordered systems in two or three dimensions indicates a strong similarity in its characteristic features and is referred as a “universal” property of dielectric materials in general [5]. This dispersive behavior of ac conductance pertains to a common scaling description [1,6,7]. A number of such scaling formalisms have been suggested in literature to scale  $\Sigma(X, f)$  data with different degrees of success and can be expressed in the following general form [3,8–13]:

$$\frac{\Sigma(X, f)}{\Sigma(X, 0)} = \frac{\Sigma(X, f)}{\Sigma_0} = s \left( \frac{f}{f_c(X)} \right) \quad (1)$$

where  $s(x)$  is a scaling function. For  $f < f_c(X)$ , the scaling function  $s(x) = 1$  corresponds to the fact that  $\Sigma(X, f)$  increases very little from  $\Sigma_0$ . At larger frequency  $f > f_c(X)$ ,  $s(x) > 1$ . Thus,  $f_c(X)$  separates the Ohmic region from the nonOhmic one along the frequency axis and can also be called a crossover (characteristic) frequency.  $f_c(X)$  sets the frequency scale for nonOhmic alternating current conduction in disordered systems [3,4] and has different expressions in different scaling formalisms [8,9,10,11]. Taylor [8] first discovered universality in alternating current conduction in ion conducting oxide glasses by demonstrating the fact that the dielectric loss for different glasses fell on a single curve against scaled frequency. Later bond [9] used  $f_c = \Sigma_0/C$  to achieve the master curve of ac conduction.  $C$  is some constant. Eq. (1) with  $f_c = \Sigma_0/C$  is referred to as “Taylor bond scaling” and has been used by many authors in a wide variety of disordered systems with  $C$  being proportional to  $1/T$ . J. C. Dyre et al. [10] successfully applied the scaling formalism given by Eq. (1) with  $f_c = \Sigma_0 T$  or  $\Sigma_0^2 \mu^2$  to demonstrate the universality of ac conduction in different ion conducting oxide glasses. Noring et al. [10] also showed that Eq. (1) with  $f_c = \Sigma_0 T$  holds good in achieving the scaling of ac conductivity data at different temperatures of alkali borate glasses  $(Na_2O), (B_2O_3), \dots$  with fixed  $\nu$  but the same scaling is not valid for samples with different  $\nu$  at a fixed  $T$ . To include the concentration of a particular component in a disordered sample, Noring et al. [10] proposed an improved version of the scaling law with  $f_c = \Sigma_0 T/\nu$  which did indeed collapse the

\* Corresponding author.

E-mail address: an.nandi@iitkgp.ac.in (U.N. Nandi).

[Home](#) > [Journal of The Institution of Engineers \(In...](#) > [Article](#)Original Contribution | [Published: 11 July 2019](#)

## A Proposal to Adjust the Time-Keeping Systems for Savings in Cycling Operation and Carbon Emission

[Amlan Chakrabarti](#)  & [Krishnendu Chakrabarty](#)[Journal of The Institution of Engineers \(India\): Series B](#)**100**, 541–550 (2019)**140** Accesses | [Metrics](#)

### Abstract

With the spread of the power transmission networks to thousands of kilometres, the integrated power grid in many countries cover multiple hours in terms of solar position. We present a general mathematical model with multiple time-keeping systems for flattening the electrical load curve in a territory having integrated power grid operations. The multiple time-keeping system areas are set up as a function of both electrical power demand and mean geographical position in longitude. Fluctuation in load results in cycling operation of coal/gas power plants and enhanced carbon emission. In this paper, an attempt is made to quantify the savings in cycling of electrical power

# An efficient wavelet and curvelet-based PET image denoising technique

Abhishek Bal , Minakshi Banerjee, Punit Sharma & Mausumi Maitra*Medical & Biological Engineering & Computing* **57**, 2567–2598 (2019) | [Cite this article](#)**472** Accesses | **14** Citations | [Metrics](#)

## Abstract

Positron emission tomography (PET) image denoising is a challenging task due to the presence of noise and low spatial resolution compared with other imaging techniques such as magnetic resonance imaging (MRI) and computed tomography (CT). PET image noise can hamper further processing and analysis, such as segmentation and disease screening. The wavelet transform-based techniques have often been proposed for PET image denoising to handle isotropic (smooth details) features. The curvelet transform-based PET image denoising techniques have the ability to handle multi-scale and multi-directional properties such as edges and curves (anisotropic features) as compared with wavelet transform-based denoising techniques. The wavelet denoising method is not optimal for anisotropic features, whereas the curvelet denoising method sometimes has difficulty in handling isotropic features.

SadhanaSpringer\_paramita.JPG

Open with ZIP Extractor

- Compose
- Inbox
- Starred
- Sent
- Drafts
- Categories
- Labels
- Personal
- Work

Sadhana (2019) 44: 205  
https://doi.org/10.1007/s12046-019-1189-7

© Indian Academy of Sciences

### Influence maximization in online social network using different centrality measures as seed node of information propagation

PARAMITA DEY, AGNEET CHATTERJEE and SARBANI ROY

Department of Computer Science and Engineering, Jadavpur University, Kolkata, India  
e-mail: dey.paramita17@gmail.com; agneet257@gmail.com; sarbani.roy@jadupuruniiversity.in

MS received 22 March 2019; revised 15 June 2019; accepted 29 July 2019

**Abstract.** Information propagation in the network is probabilistic in nature; simultaneously, it depends on the connecting paths of the propagation. Selection of seed nodes plays an important role in determining the levels and depth of the contagion in the network. This paper presents a comparative study when seed nodes for information propagation are selected through the properties of different centrality measures in the social network. This study captures the interaction measures of nodes in the social network, selects seed nodes based on five centrality measures, i.e. degree distribution, betweenness centrality, closeness centrality, Eigenvector and PageRank, and compares the affected nodes and levels of propagation within the network. We demonstrate the performance of the different centrality measures by processing three datasets of social network, Twitter network, Bionis network and author collaborative network. For the propagation of the information, we use breadth-first search (BFS) and susceptible-infectious-recovered (SIR) model and a detailed comparative study is also presented for each of the seed nodes selected using aforementioned network properties. Results show that the Eigenvector centrality and PageRank centrality measures outperform other centrality measures in all test cases in terms of propagation level and affected nodes during information propagation. Both Eigenvector and PageRank network data processing required a high computational overhead. For this reason we propose a hybrid model where using 4-core the network is degenerated into a smaller network and centrality nodes are extracted from the smaller network. These centrality nodes, as compared to original centrality nodes, perform almost in the same manner in terms of influence maximization when it is chosen in a rational way.

**Keywords.** Online social network; influence maximization; centrality measures; eigenvector; pageRank; seed node; information propagation; degenerative network.

### Weyl transformation: A dynamical degree of freedom in the light of Dirac's Large Number hypothesis

Prasenjit Paul<sup>1,2</sup>, Ritpriyati Senapati<sup>1,3</sup> and Subal Das<sup>1,4</sup>

<sup>1</sup>Department of Physics,  
Government College of Engineering and Ceramic Technology,  
Kolkata 700 010, West Bengal, India

<sup>2</sup>Department of Physics,  
Indian Institute of Engineering Science and Technology,  
Kharagpur 721 103, West Bengal, India

<sup>3</sup>prasen@iitkgp.ac.in  
<sup>4</sup>subal@iitkgp.ac.in

Received 28 November 2019

Accepted 9 January 2020

Published 3 March 2020

In Einstein's Field Equation (EFE), the geometry of the spacetime is connected with the matter distribution. The geometry of the gravitational sector deals with classical macroscopic objects involving gravitational units while the matter sector can be better described by quantum theory involving atomic units. It has been argued by Dirac

Activate Windows  
Go to Settings to activate Windows.

Journal - pratap071083@gmail.com x (44) Agatha Christie | 29% x +

mail.google.com/mail/u/0/#inbox/FMfcgzcGnLPWbHKpQwfhHbXvWingDv7projector=1

International Journal of Applied Power Engineering (IJAPE)  
Vol. 9, No. 2, August 2020, pp. 113–126  
ISSN: 2252-8792, DOI: 10.11591/ijape.v9.i2.pp113-126 113

### Power system fault identification and localization using multiple linear regression of principal component distance indices

Alok Mukherjee<sup>1</sup>, Palash Kr. Kundu<sup>2</sup>, Arabinsha Das<sup>1</sup>  
<sup>1</sup>Govt. College of Engineering and Ceramic Technology, India  
<sup>2</sup>Department of Electrical Engineering, Jadavpur University, India

---

Article Info	ABSTRACT
<p><b>Article history:</b> Received Jul 25, 2019 Revised Feb 19, 2020 Accepted Mar 3, 2020</p> <p><b>Keywords:</b> Multiple linear regression PCA scores PCDI Ratio analysis Ratio error analysis Ratio indices</p>	<p>This paper is focused on the application of principal component analysis (PCA) to classify and localize power system faults in a three phase, radial, long transmission line using receiving end line currents taken almost at the midpoint of the line length. The PCA scores are analyzed to compute principal component distance index (PCDI) which is further analyzed using a ratio based analysis to develop ratio index matrix (R) and ratio error matrix (RE) and ratio error index (REI) which are used to develop a fault classifier, which produces a 100% correct prediction. The later part of the paper deals with the development of a fault localizer using the same PCDI corresponding to six intermediate training locations, which are analyzed with tool like multiple linear regression (MLR) in order to predict the fault location with significantly high accuracy of only 87 m for a 150 km long radial transmission line.</p> <p>This is an open access article under the <a href="#">CC BY-SA</a> license.</p>

---

Corresponding Author:

113 Journals.pdf ^ Show all

12:34 PM 6/29/2023



← brane published version.pdf Open with

International Journal of Modern Physics  
Vol. 28, No. 13 (2019) 1941010 (15 pages)  
© World Scientific Publishing Company  
DOI: 10.1142/S0218271819410104

World Scientific  
www.worldscientific.com

Inflation in anisotropic brane universe using tachyon field

Rikpratik Sengupta<sup>\*,1</sup>, Prasenjit Paul<sup>\*-1,4</sup>,  
Bibosh Chandra Paul<sup>2,1</sup> and Saibal Ray<sup>\*\*</sup>

<sup>\*</sup>Department of Physics,  
Government College of Engineering and Ceramic Technology,  
Kolkata 700 010, West Bengal, India

<sup>1</sup>Department of Physics,  
Indian Institute of Engineering Science and Technology,  
Howrah 711 103, West Bengal, India

<sup>3</sup>Department of Physics, University of North Bengal,  
Siliguri 734 012, West Bengal, India  
\*rikpratik.sengupta@gmail.com  
\*prasenjit071083@gmail.com  
bcpaul@associates.iisc.ernet.in  
\*\*saibal@associates.iisc.ernet.in

Received 29 July 2019

Page 1 / 15

01928 Downloaded from www.worldscientific.com  
Use and distribution is strictly not permitted, except for Open Access articles.

Type here to search 26°C Mostly cloudy



**Hindawi**  
Advances in High Energy Physics  
Volume 2020, Article ID 5129579, 9 pages  
<https://doi.org/10.1155/2020/5129579>



**Research Article**  
**Generalized Phenomenological Models of Dark Energy**

**Prasenjit Paul<sup>1</sup> and Rikpratik Sengupta<sup>2</sup>**

<sup>1</sup>Department of Physics, Indian Institute of Engineering Science and Technology, Shibpur, India  
<sup>2</sup>Department of Physics, Government College of Engineering and Ceramic Technology, Kolkata, 700010 West Bengal, India

Correspondence should be addressed to Prasenjit Paul; [prasenj@1983@gmail.com](mailto:prasenj@1983@gmail.com)

Received 30 July 2019; Accepted 28 November 2019; Published 28 February 2020

Academic Editor: Luca Stanco

Copyright © 2020 Prasenjit Paul and Rikpratik Sengupta. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited. The publication of this article was funded by SCOAP<sup>3</sup>.

It was first observed at the end of the last century that the universe is presently accelerating. Ever since, there have been several attempts to explain this observation theoretically. There are two possible approaches. The more conventional one is to modify the matter part of the Einstein field equations, and the second one is to modify the geometry part. We shall consider two phenomenological models based on the former, more conventional approach within the context of general relativity. The phenomenological models in this paper consider a  $\Lambda$  term firstly a function of  $\dot{\Lambda}$  and secondly a function of  $\rho$ , where  $a$  and  $\rho$  are the scale factor and matter energy density, respectively. Constraining the free parameters of the models with the latest observational data gives satisfactory values of parameters as considered by us initially. Without any field theoretic interpretation, we explain the recent observations with a dynamical cosmological constant.

Activate Windows  
Go to Settings to activate Windows

## Bias Exponent of Resistance Noise as a Probe for Disordered Systems

Animesh Kr. Dey, Upendranath Nandi,<sup>\*</sup> Deep Talukdar, Rajkumar Chakrabarty, and Kamal Kumar Bardhan

The power spectral density  $S_v(f)$  of voltage fluctuations in the Ohmic regime of a system varies with voltage  $V$  as  $S_v(f) \propto V^\beta$  where  $\beta$  is the bias exponent. The equilibrium resistance fluctuation in a homogeneous system provides  $\beta = 2$  but in disordered systems, we show that  $\beta$  strongly depends on quenched disorder and temperature and is less than 2 in the Ohmic region. At a fixed temperature,  $\beta$  remains nearly equal to 2 at low disorder and decreases from 2 to 1 with the increase in disorder. Interestingly, similar variation in  $\beta$  is observed with the change in temperature from high to low at a fixed quenched disorder. These two cases favor weak localization in the limit of high disorder or low temperature. Experimental results on manganese compounds indicate that the bias exponent  $\beta$  could be used as a sensible nondestructive parameter to identify the existence of a phase transition evolved during the course of investigation. Remarkable correlations between the electrical transport and the power spectral density  $S_v(f)$  are observed and explained with the help of inhomogeneous distribution of currents. The results are also supported by the non-Gaussian nature of the second spectrum of  $1/f$  noise at different temperatures.

in complex systems such as solid-state devices,<sup>1,2</sup> composites,<sup>3,4</sup> multilayer carbon nanotubes in HDPE matrix,<sup>5</sup> conducting polymers,<sup>6,7</sup> biological fibers,<sup>8</sup> organic conductors,<sup>9</sup> manganites,<sup>10</sup> thin films of manganites,<sup>11,12</sup> ultrathin Co film,<sup>13</sup> and photoconductive semiconductor solar cells.<sup>14</sup> A fundamental assumption of the resistance fluctuation is that it is an intrinsic property unaffected by the current flowing through the system.<sup>15</sup> Under this assumption, the power spectral density  $S_v(f)$  in the Ohmic regime has the expression,

$$S_v(f) = \frac{e^4 V^\beta}{N^2 f^\gamma} \quad (1)$$

where  $N$  stands for the total number of charge carriers and  $\alpha$  is the dimensionless Hooge parameter.  $V$  is the average dc voltage across the sample and  $\gamma$  is the frequency exponent varying between 0.8 and 1.2. The parameter  $\beta$  in Eq. (1) is known as the bias exponent with a value 2

in homogeneous systems in the Ohmic region. Such a relation is experimentally observed in a wide variety of disordered systems.<sup>1,2,3,11,16</sup>

If the fluctuation in voltage is affected by the current flowing through the sample, the square of such voltage fluctuations in the Ohmic regime can be written as,

$$\begin{aligned} \langle (dV)^2 \rangle &= I^2 \langle (dR)^2 \rangle \propto I^\beta \\ \text{or} \quad \langle (dR)^2 \rangle &\propto I^{\beta-2} \end{aligned} \quad (2)$$

Equation (2) indicates that  $\beta = 2$  is an identity arising out of the assumption that the inherent resistance fluctuations independent of any driving force such as current or voltage are always there but a constant current or voltage is used to make the fluctuations visible. On the contrary,  $\beta \neq 2$  in the Ohmic regime has a significant implication in that the current or voltage is not a mere probe but takes active part in the mechanism of generation of fluctuation. In the Ohmic regime, such reports exist in the weak localization region at low temperature or at high disorder limit<sup>17,18</sup> and indicate that  $\beta$  is a function of quenched disorder<sup>19,20</sup> and temperature.<sup>21,22,17</sup> Except in Barone et al.,<sup>23</sup> no concrete physical reasoning or mathematical modeling has been invoked to explain the variation of  $\beta$  with quenched

### 1. Introduction

Resistance noise is one of the most ubiquitous and generic phenomenon occurring to diverse classes of materials ranging from homogeneous to inhomogeneous in condensed matter physics.<sup>1-6</sup> In recent times, there has been many-fold increase in using the resistance noise as a tool to probe transport mechanism

A. K. Dey, Dr. U. Nandi  
Department of Physics  
Scottish Church College  
1 & 3 Lingpark Square, Kolkata 700 006, West Bengal, India  
E-mail: anophys@scotchcollege.ac.in  
Dr. D. Talukdar  
Cyprusans Labs Private Limited  
Wipro IT Park, Newtown, Kolkata 700 140, West Bengal, India  
Dr. R. K. Chakrabarty  
Department of Physics  
Government College of Ceramic Engineering and Technology  
Kolkata 700 030, West Bengal, India  
Prof. K. K. Bardhan  
Kalpana Chawla Centre for Space and Nano Sciences  
26/4/13, Radha Mather Datta Garden Lane, Kolkata 700010, West Bengal, India

DOI: 10.1002/pisip.201700664

Google Ads | Invisi | ID: 2019 | Classical and Quantum Approaches to Black Holes | Download | Hindawi.com/journals/ahp/2019/5726836/

Hindawi Journals Publish with us Publishing partnerships About us Blog

## Advances in High Energy Physics

Journal overview | For authors | For reviewers | For editors | Table of Contents | Special Issues

### Classical and Quantum Approaches to Black Holes

View this Special Issue

**Editorial | Open Access**  
Volume 2019 | Article ID 5726836 | <https://doi.org/10.1155/2019/5726836>

Download

## Classical and Quantum Approaches to Black Holes

Irina Radinschi<sup>1</sup>, Farook Rahaman<sup>2</sup>, Theophanos Grammenos<sup>3</sup>, Saibal Ray<sup>4</sup>, and I-Ching Yang<sup>5</sup>

Received	Accepted	Published
06 Mar 2019	06 Mar 2019	01 Apr 2019

**Views** 1021  
**Downloads** 768

Citation | More | Order

10.1155/2019/5726836-OL.pdf | 10.1155/2019/5726836-...pdf | 10.1155/2019/5726836-...pdf

10:21 29-05-2021

World Scientific  
Connecting Great Minds

Subject Journals Books Major Reference Works Resources For Partners Open Access About Us Help

International Journal of Modern Physics D | Vol. 28, No. 06, 1930014 (2018)  
Review Papers

# Dirac's large number hypothesis: A journey from concept to implication

Sabali Ray, Utpal Mukhopadhyay, Sruvan Ray, and Arjya Bhattacharjee


<https://doi.org/10.1142/S0218271819300143> Cited by: 0

< Previous Next >

PDF/EPUB Tools Share Recommend To Library

## Abstract

Large dimensionless numbers, arising out of ratios of various physical constants,

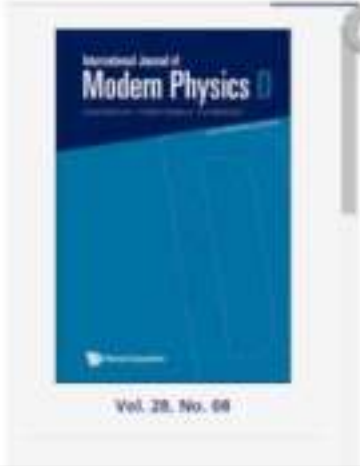

10.1007/s12668-018-0143-1 10.1007/s12668-018-0143-1 10.1142/S0218271819300143

10:25 28-05-2023

Home > The European Physical Journal C > Article

Regular Article - Theoretical Physics | [Open Access](#) | Published: 28 June 2019

# Charged anisotropic strange stars in Finslerian geometry

Sourav Roy Chowdhury, Debasrata Deb, Saibal Ray, Jasook Babar & B. K. Guha

*The European Physical Journal C* **79**, Article number: 547 (2019) | [Cite this article](#)

1011 Accesses | 10 Citations | 1 Altmetric | [Metrics](#)

**Abstract**

We investigate a simplified model of the strange stars in the framework of Finslerian geometry, composed of charged fluid. It is considered that the fluid consisting of three flavor quarks including a small amount of non-interacting electrons to maintain the chemical equilibrium and assumed that the fluid is compressible by nature. To obtain the simplified form of

**Download PDF**

**Working on a manuscript?**  
Avoid the common mistakes

**Sections** | Figures | References

- [Abstract](#)
- [Introduction](#)
- [Basic stellar equations](#)
- [Charge distribution, density profile and...](#)
- [Solution of the Einstein-Maxwell field e...](#)
- [Physical features of the stellar system](#)

1281  
29.05.2021

360x (2,330) - j... x | 10.1138/cjcp-2018-0540 | Study of charged compact stars ...

Canadian Science Publishing

AUTHORS & REVIEWERS LIBRARIANS & AGENTS CART REGISTER LOGIN

Canadian Journal of Physics JOURNAL HOME BROWSE CONTENT COLLECTIONS ABOUT

Home / Canadian Journal of Physics / Volume 95, Number 12, December 2018 / Study of charged compact stars ...

Article

# Study of charged compact stars with class 1 metric under general relativity

Authors: S. S. Islam, S. Roy Chowdhury, Sibal Roy, and B. Dey

Publication: Canadian Journal of Physics, 4 April 2019 | <https://doi.org/10.1138/cjcp-2018-0540>

3 24 GET ACCESS

## Abstract

In the present paper we study compact stars under the background of Einstein-Maxwell space-time, where the 4-dimensional spherically symmetric space-time of class 1 along with the

1292 29-05-2021

ScienceDirect

Access through your Institution Purchase PDF

Article preview

Abstract

Introduction

Section snippets

References (10)

Cited by (42)

Recommended articles (6)

**Annals of Physics**  
Volume 401, February 2019, Pages 1–20

**Strange stars in Krori–Barua spacetime under  $f(R, T)$  gravity**

Suarna Biswas<sup>a</sup>, Shoumik Ghosh<sup>a</sup>, Sakel Barua<sup>a, b</sup>, A. Farook Rahaman<sup>a</sup>, B.K. Guha<sup>a</sup>

Show more

+ Add to Mendeley Share Cite

<https://doi.org/10.1016/j.aop.2018.12.004> Get rights and content

Typesetting math: 100%

Abstract

FEEDBACK

12:35  
29.05.2021



World Scientific  
Connecting Great Minds

International Journal of Modern Physics D | Vol. 28, No. 03, 1950053 (2018)  
Research Paper

## A study on charged compact stars

S. K. Maurya, Saibal Ray, Abdul Aziz, M. Khlopov, and P. Charbonnet

<https://doi.org/10.1142/S0218271819500536> | Cited by: 5

PDF/EPUB Tools Share Recommend To Library

### Abstract

In this paper, the Einstein–Maxwell spacetime is considered for compact stellar system. To find out solutions of the field equations, we adopt a finite and positive well-behaved metric potential. Under this particular choice, we therefore develop the expressions of the physical features, such as mass, charge, density and pressure, for stellar system in

International Journal of  
**Modern Physics D**  
Vol. 28, No. 03

Metrics

12:39  
29-05-2021



## A new model for strange stars

Debabrata Deb<sup>1</sup> · Sourav Roy Chowdhury<sup>1</sup> · Saibal Ray<sup>2</sup> ·  
Farook Rahaman<sup>3</sup>

Received: 6 March 2018 / Accepted: 6 August 2018  
© Springer Science+Business Media, LLC, part of Springer Nature 2018

### Abstract

In the present work, we attempt to find a new class of solutions for the spherically symmetric perfect fluid sphere by employing the homotopy perturbation method (HPM), a new tool via which the mass polynomial function facilitates to tackle the Einstein field equations. A set of interior solutions found on the basis of the simplest MIT bag model equation of state in the form  $p = \frac{1}{3}(\rho - 4B)$  where  $B$  is the bag constant. The proposed interior metric for the stellar system is consistent with the exterior Schwarzschild spacetime on the boundary. In addition, we also conduct a detailed study on different tests, viz. the energy conditions, TOV equation, adiabatic index, Buchdahl limit, etc., to verify the physical validity of the proposed model. The numerical value of the used parameters are predicted for different strange star candidates, for different chosen values of the bag constant. In a nutshell, by exploiting HPM technique first time ever in the field of relativistic astrophysics, we have predicted in the present literature a singularity-free and stable stellar model which is suitable to describe ultra-dense objects, like strange (quark) stars.

**Keywords** General relativity · Homotopy perturbation method · Strange stars

---

✉ Saibal Ray  
saibal@associates.iueaa.in

Debabrata Deb  
ddeb.rs2016@physics.iuests.ac.in

Sourav Roy Chowdhury  
sourav.rs2016@physics.iuests.ac.in

Farook Rahaman  
rahaman@associates.iueaa.in

<sup>1</sup> Department of Physics, Indian Institute of Engineering Science and Technology, Shibpur, Howrah, West Bengal 711103, India

<sup>2</sup> Department of Physics, Government College of Engineering and Ceramic Technology, Kolkata, West Bengal 700010, India

<sup>3</sup> Department of Mathematics, Jadavpur University, Kolkata, West Bengal 700032, India

SpringerLink

Home > The European Physical Journal C > Article

Regular Article - Theoretical Physics | [Open Access](#) | Published: 27 July 2018

# Anisotropic strange stars in Tolman–Kuchowicz spacetime

M. K. Jasim, Debabrata Deb, Sajibul Ray, Y. K. Gupta & Sourav Roy Chowdhury

*The European Physical Journal C* **78**: Article number: 603 (2018) | [Cite this article](#)

1631 Accesses | 54 Citations | 1 Abstract | [Metrics](#)

**Abstract**

We attempt to study a singularity-free model for the spherically symmetric anisotropic strange stars under Einstein's general theory of relativity by exploiting the Tolman–Kuchowicz (Tolman in *Phys Rev* **55**:364, 1959; Kuchowicz in *Acta Phys Pol* **33**:541, 1968) metric. Further, we have assumed that the cosmological constant  $\Lambda$  is a scalar variable

[Download PDF](#)

Working on a manuscript? [Avoid the common mistakes](#)

**Sections** | [Figures](#) | [References](#)

- [Abstract](#)
- [Introduction](#)
- [Basic stellar equations](#)
- [Equation of state](#)
- [Solution of the Einstein field equations](#)

10.1007/s00754-018-01...pdf

10.1007/s00754-018-01...pdf

10.1007/s00754-018-01...pdf

Show all

13:28 29-05-2023

ScienceDirect

Access through your institution Purchase PDF

Article preview

Abstract

Introduction

Section snippets

References (39)

Cited by (15)

Recommended articles (6)

 **Annals of Physics**  
Volume 391, August 2018, Pages 152–169



## A generalized family of anisotropic compact object in general relativity

S.K. Maurya<sup>a,\*</sup>, Saibal Ray<sup>a,†</sup>, Shounak Ghosh<sup>a,‡</sup>,  
Sarbjit Maurya<sup>a,§</sup>, Smitha T.T.<sup>a,¶</sup>

Show more

+ Add to Mendeley Share Cite

<https://doi.org/10.1016/j.aop.2018.05.012> Get rights and content

FEEDBACK

10.1007/s40714-018-01...pdf

10.1007/s40714-...pdf

10.1088/1475-7524-...pdf

Show all

13:43  
29-05-2023

36xw (2,000) ... x (1) PWS (9287) ... x TeachingPhys... x Sci-Hub (10.11) ... x Download Re... x

academic.oup.com/mnras/article/485/4/5652/5374538?open=force

OXFORD  
ACADEMIC Journals Books

# Monthly Notices

of the Royal Astronomical Society

Issues ▾ Advance articles ▾ Submit ▾ Purchase Alerts About ▾



Volume 485, Issue 4  
June 2019

## Article Contents

Abstract

JOURNAL ARTICLE

### Exploring physical features of anisotropic strange stars beyond standard maximum mass limit in $f(R, T)$ gravity

Debabrata Deb, Sergei V Ketov, S.K. Maurya, Maxim Khlopov, P.H.R.S. Moraes, Saibal Ray

Monthly Notices of the Royal Astronomical Society, Volume 485, Issue 4, June 2019, Pages 5652–5665, <https://doi.org/10.1093/mnras/stz708>

Published: 11 March 2019 Article history ▾

PDF Split View Cite Permissions Share ▾

10.1007/s40714-019-01...pdf 10.1007/s40714-019-01...pdf 10.1007/s40714-019-01...pdf Show all X

13:15 29-05-2021

ScienceDirect

Access through your institution Purchase PDF

Article preview  
Abstract  
Introduction  
Section snippets  
References (63)  
Cited by (32)  
Recommended articles (6)

**Annals of Physics**  
Volume 394, July 2018, Pages 230-248

**Gravastars with higher dimensional spacetimes**

Shourak Ghosh,<sup>a</sup> S. Saibal Ray,<sup>b</sup> S. Farook Bahar,<sup>c</sup> S. B. Gaha,<sup>a</sup>

Show more

+ Add to Mendeley Share Cite

<https://doi.org/10.1016/j.aop.2018.05.002> Get rights and content

Abstract

FEEDBACK

10.1007/s00754-018-01...pdf  
10.1007/s00754-...pdf  
10.1088/1475-7524/...pdf

13:58  
29-05-2023

The screenshot shows a web browser window displaying an article on SpringerLink. The browser's address bar shows the URL [link.springer.com/article/10.1140/epjc/s10052-018-6442-4](https://link.springer.com/article/10.1140/epjc/s10052-018-6442-4). The page title is "Solar system tests in constraining parameters of dyon black holes" by Farook Rahaman, Sabinauddin Molla, Annu Ali, and Saibal Ray. The article is published in *The European Physical Journal C*, volume 78, article number 948 (2018). The abstract discusses the possibility of constraining dyon black holes based on observational data from the Solar system, specifically the perihelion precession of Mercury and the deflection of light by the Sun. The page includes a "Download PDF" button, a "Working on a manuscript?" section, and a table of contents with sections: Abstract, Introduction, Background formalism for dyonic black holes, Solar system tests for dyonic black holes, and Discussion and conclusion. The Windows taskbar at the bottom shows the date as 29-05-2023 and the time as 13:41.

Home > The European Physical Journal C > Article

Regular Article - Theoretical Physics | [Open Access](#) | Published: 19 November 2018

# Solar system tests in constraining parameters of dyon black holes

Farook Rahaman, Sabinauddin Molla, Annu Ali & Saibal Ray

*The European Physical Journal C* **78**: Article number: 948 (2018) | [Cite this article](#)

785 Accesses | 4 Citations | | [Metrics](#)

## Abstract

In the present paper we examine the possibility of constraining dyon black holes based on the available observational data at the scale of the Solar system. For this we consider the classical tests of general relativity, viz., the perihelion precession of the planet Mercury and the deflection of light by the Sun. In connection to mathematical analysis we are

[Download PDF](#)

Working on a manuscript? [Avoid the common mistakes](#)

**Sections** | [References](#)

- [Abstract](#)
- [Introduction](#)
- [Background formalism for dyonic black holes](#)
- [Solar system tests for dyonic black holes](#)
- [Discussion and conclusion](#)

201007140714-OL.pdf | 10.1140/epjc/s10052-018-6442-4.pdf | 10.1007/978-1-4939-7524-1.pdf | [Show all](#)

13:41 29-05-2023

ScienceDirect

Access through your institution Purchase PDF

Article preview  
Abstract  
Introduction  
Section snippets  
References (63)  
Cited by (32)  
Recommended articles (6)

**Annals of Physics**  
Volume 394, July 2018, Pages 230-248

**Gravastars with higher dimensional spacetimes**

Shourak Ghosh,<sup>a</sup> S. Saibal Ray,<sup>b</sup> A. S. Farook Bahar,<sup>c</sup> S. B. Gaha,<sup>a</sup>

Show more

+ Add to Mendeley Share Cite

<https://doi.org/10.1016/j.aop.2018.05.002> Get rights and content

Abstract

FEEDBACK

201007140714-0L.pdf 10.1007/978-1-4939-9714-1.pdf 10.1088/1475-7524/1504.pdf Show all

13:47 29-05-2021





## A Study and Analysis of Lock and STM Overheads

Ryan Saptarshi Ray<sup>1\*</sup>, Parama Bhaumik<sup>2</sup>, Utpal Kumar Ray<sup>3</sup>

<sup>1,2,3</sup>Dept. of Information Technology, Jalapour University, Kolkata, India

\*Corresponding Author: ryan\_ray@rediffmail.com, Tel: 9833320613

DOI: <https://doi.org/10.26433/chemrxiv-2019-5-40306> | Available online at: [www.ijcse.org](http://www.ijcse.org)

Accepted: 18/May/2019, Published: 31/May/2019

**Abstract**— In this paper we make a comparative study of the overheads of locks and STM by taking different practical synchronization problems as examples to understand why the performance of STM is worse than that of locks. Overhead is the combination of extra or indirect computation time, memory, bandwidth, or other resources that are required to perform a specific task. While executing parallel programs whenever any lock or STM function is called it takes some time and also occupies some space. The total time taken by all the lock or STM calls of the program is the total lock or STM time overhead of that program. The total space occupied by all the lock or STM calls of the program is the total lock or STM space overhead of that program. The flexible approach is an approach of programming with STM by which STM has been made more user-friendly and by which execution time of STM has been reduced. We make a study of the overheads of the flexible approach also. We found that the time and space overheads of STM are higher than that of locks. The time and space overheads of the Flexible Approach were less than those of STM but higher than those of locks.

**Keywords**— Multiprocessing, Parallel Processing, Locks, Software Transactional Memory, Overheads

### I. INTRODUCTION

Overhead is the combination of excess or indirect computation time, memory, bandwidth, or other resources that are required to perform a specific task [1].

Software Transactional Memory (STM) is a new approach for solving synchronization problems in parallel programs that does not suffer from the drawbacks of locks. However performance of STM is either equal to or worse than that of locks. In this paper we make a comparative study of the overheads of locks and STM to understand why this happens.

While executing parallel programs whenever any lock or STM function is called it takes some time and also occupies some space. The total time taken by all the lock or STM calls of the program is the total lock or STM time overhead of that program. The total space occupied by all the lock or STM calls of the program is the total lock or STM space overhead of that program.

The flexible approach is an approach of programming with STM by which STM has been made more user-friendly and by which execution time of STM has been reduced. We make a study of the overheads of the flexible approach also.

We found that the time and space overheads of STM are higher than that of locks. The time and space overheads of the Flexible Approach were less than those of STM but higher than those of locks.

Section II discusses about different approaches which have been proposed to improve the performance of STM. Section III shows the time overhead for locks and STM for different practical synchronization problems. Section IV shows the space overhead for locks and STM for different practical synchronization problems. Section V shows the time overhead for the Flexible Approach for different practical synchronization problems. Section VI shows the space overhead for the Flexible Approach for different practical synchronization problems. Section VII makes a comparison of the overheads for locks, STM and the Flexible Approach. Section VIII shows the specifications of the system in which the programs were compiled and executed. Section IX concludes the paper.

### II. RELATED WORK

Different approaches have been proposed to improve the performance of STM. These are discussed below:

In 2007 Yang Ni, Vijay Menon, Richard L. Hudson, Ali-Reza Adl-Tahatabai, J. Eliot, B. Moss, Brian Sala, Anthony L. Hosking, Tatiana Shpeisman published a paper entitled "Open Nesting in Software Transactional Memory" [2]. This paper described new language constructs to support open nesting in Java and also discussed new abstract locking mechanisms that a programmer could use to prevent logical

## Flexible Programming Approach using STM

Ryan Saptarshi Ray<sup>1\*</sup>, Parama Bhaumik<sup>2</sup>, Utpal Kumar Ray<sup>3</sup>

<sup>1,2,3</sup>Dept. of Information Technology, Jalapour University, Kolkata, India

\*Corresponding Author: ryan\_ray@rediffmail.com, Tel: 9833320673

Available online at: www.ijcses.in

Accepted: 19 July 2018, Published: 31 July 2018

**Abstract**— Software Transactional Memory (STM) is a promising new approach to programming shared-memory parallel processors which does not suffer from the drawbacks of locks. However STM also has some limitations. One of the limitations of STM is that while programming with STM users have to identify the critical sections explicitly and enclose them in transactions using appropriate STM calls to ensure synchronization. This approach is similar to using locks in parallel programs. This paper introduces a new flexible approach for programming using STM in which users do not need to identify critical sections explicitly. In this approach whenever users need to perform read or write operations they can do so using appropriate STM calls and STM will ensure synchronization by its internal constructs. Thus users can concentrate only on the algorithm of the parallel problem without thinking about synchronization. Thus this approach is very user-friendly. Time taken will also be less than lock programming as users do not have to identify critical sections explicitly.

**Keywords**— Multiprocessing, Parallel Processing, Locks, Software Transactional Memory, Flexible Programming Approach

### I. INTRODUCTION

Ensuring synchronization is a very important aspect of parallel programming. Currently locks are used to ensure synchronization. But locks suffer from some drawbacks. Software Transactional Memory (STM) is a promising new approach to programming shared-memory parallel processors which does not suffer from the drawbacks of locks. But STM also has some limitations. One of the limitations of STM is that while programming with STM users have to identify the critical sections explicitly and enclose them in transactions using appropriate STM calls to ensure synchronization. This approach is similar to using locks in parallel programs where also users have to identify critical sections explicitly and enclose them using appropriate lock calls to ensure synchronization. This paper introduces a new flexible approach for programming using STM in which users do not need to identify critical sections explicitly. In this approach whenever users need to perform read or write operations they can do so using appropriate STM calls and STM will ensure synchronization by its internal constructs. Thus users can concentrate only on the algorithm of the parallel problem without thinking about synchronization. Thus this approach is very user-friendly. Time taken will also be less than lock programming as users do not have to identify critical sections explicitly.

Section III describes the Flexible Programming Approach. Section IV solves the Readers-Writers Problem using the

Flexible Programming Approach. Section V shows the experimental results for solving the Readers-Writers Problem using Flexible Programming Approach.

### II. RELATED WORK

Different approaches have been proposed to improve the performance of STM. These are discussed below.

In 2007 Yang Ni, Vijay Menon, Richard L. Hudson, Ali-Reza Adl-Tabatabai, J. Eliot, B. Moss, Britis Saha, Antony L. Hosking, Tamara Shpeisman published a paper entitled "Open Nesting in Software Transactional Memory". [1] This paper presented an implementation of open nested transactions in a Java-based software transactional memory (STM) system. It described new language constructs to support open nesting in Java and also discussed new abstract locking mechanisms that a programmer could use to prevent logical conflicts. It demonstrated how these constructs could be mapped efficiently to existing STM data structures. Finally, it evaluated the system on a set of Java applications and data structures, demonstrating how open nesting could enhance application scalability. In 2009 Zhengyu He and Bo Hong published a paper entitled "Impact of Early Abort Mechanisms on Lock-Based Software Transactional Memory". [2] This paper presented a theoretical analysis characterizing the properties of early abort and its impact on the performance of lock-based STMs. Quering theory was adopted to model the behaviors of transactional execution. Analytical results were obtained for STMs with and without early abort. The analysis was validated through extensive

## 3D unsupervised modified spatial fuzzy *c*-means method for segmentation of 3D brain MR image

Kamarujjaman & Mausumi Maitra 

*Pattern Analysis and Applications* **22**, 1561–1571 (2019) | [Cite this article](#)

248 Accesses | 8 Citations | [Metrics](#)

### Abstract

This paper proposed a novel 3D unsupervised spatial fuzzy-based brain MRI volume segmentation technique in the presence of intensity inhomogeneity and noise. Instead of static masking, dynamic 3D masking has been proposed to measure the correlation among neighbors. The local membership function is defined based on the weighted correlation among neighbors. The local and global membership functions are combined to suppress the inhomogeneity and noise at the time of clustering. A weighted function is defined based on the 3D dynamic neighborhood to optimize the objective function in 3D space. In 2D slice-based MRI image segmentation techniques, the selection of the slice of interest is very important and it depends on the experience and skills of the expertise. As the proposed unsupervised method segments the 3D brain MRI volume as a whole, there is no need of such expertise. The detailed

**Gmail**

- Compose
- Inbox
- Starred
- Unread
- Important
- Spam
- Drafts
- Categories
- More
- Labels
- Personal
- Work
- Travel
- More



# Chaotic firefly algorithm-based fuzzy C-means algorithm for segmentation of brain tissues in magnetic resonance images ☆

Partha Ghosh<sup>1, A</sup>, Silpari Mall<sup>2</sup>, Shantu Kumar Das<sup>3</sup>

Show more

+ Add to Mendeley | Share | Cite

<https://doi.org/10.1016/j.jvcir.2024.04.007>

Get rights and content

## Abstract

Image segmentation with clustering approach is widely used in biomedical application. Accurate brain Magnetic Resonance (MR) image segmentation is a challenging task due to the complex anatomical structure of brain images in addition to the existence of intensity inhomogeneity, partial volume effects and noise. In this study, a spatial modified bias corrected PCM algorithm is applied to brain MRI for the purpose of segmentation into White Matter (WM), Gray Matter (GM) and Cerebrospinal fluid (CSF)



## A Simple Approach to Identify Power System Transmission Line Faults using PNN

A. Acharya<sup>1</sup>, A. Mukherjee<sup>2</sup>, S. Jana<sup>3</sup>

**Abstract** - Large interconnected overhead transmission lines are very often subjected to various types of faults leading to mal-operation or even discontinuity of good quality power flow. Hence, accurate and prompt identification and classification of different power system faults have become one of the major areas of research these days to ensure reliability, protection and system stability. This paper presents a Probabilistic Neural Network (PNN) based simple and novel approach to distinguish and classify different types of power system faults. Electromagnetic Transient Program (EMTP) simulation software has been used to simulate a frequency dependent model and extract the receiving end voltage data only for various faults carried out at different distances. Only two sets of simulated data corresponding to two different locations are fed directly to the PNN algorithm so designed for training, instead of preprocessing the data by filtering tools like Wavelet Transform, component analysis etc. which is done most commonly, thus requiring lesser computation burden, thus saving time. Experimental verification has been carried out to validate the proposed algorithm.

**Index Terms**—Probabilistic Neural Network (PNN), Electromagnetic Transient Program (EMTP).

phases. Therefore, quick identification and classification of faults is of most importance to ensure power system stability and reliability. The proposed research work is intended to serve the same purpose, i.e. to detect power system fault, if any, and categorize the fault in different fault types for a 400 kV, three phase, single circuit, 150 km long overhead transmission line.

The primary objective of power system fault analysis is to extract some key features from the fault waveforms using the different identifier techniques and provide these data to the detection mechanism to find the true cause of the fault and restore the normal operation in least possible time. Techniques normally used to develop such power system protection algorithm are Wavelet Transformation based Artificial Neural Network (ANN) analysis, Fuzzy Inference system, Principal Component Analysis (PCA), support vector analysis etc. and different hybrid models of these individual techniques. The tripping circuit of the circuit breakers and other protective relaying mechanisms are given proper signals at the correct instants during any mal-operation, to interrupt the power flow immediately. Hence, fast and accurate detection of fault along with precise fault location have been practiced by researchers to ensure safe and secure system operation. However, less time for the recovery

ACTA TECHNICA CONVINENSIS - Bulletin of Engineering  
Tome XI (2018) | Fascicule 3 (July - September)

<sup>1</sup>Alok MUKHERJEE, <sup>2</sup>Susanta RAY, <sup>3</sup>Arabinda DAS

## MICROCONTROLLER BASED SPEED CONTROL AND SPEED REGULATION SCHEME FOR BLDC MOTOR UNDER VARIABLE LOADING CONDITIONS

<sup>1,2</sup> Department of Electrical Engineering, Jadavpur University, Kolkata, INDIA

**Abstract:** Brushless dc (BLDC) motors are gaining immense popularity in recent era due to its major advantages over the more conventional motors, only put behind due to the cost involved in designing its most imperative controller. Hence, the design of a low cost, yet efficient and effective controller is an imperative part of the motor drive system. This paper presents a design and implementation of a microcontroller based low cost drive for a 3-phase, trapezoidal back-emf, permanent magnet BLDC motor. A Pulse Width Modulation (PWM) based modified adaptive two and half step digital on-off control algorithm has been designed to provide a constant operating speed overcoming the effect of variation in load with high load torque, as well as provide faster response during transients to restore speed. Proteus VSM (Virtual System Modeling) software is used as a real-time simulation tool to model the BLDC motor drive. Experimental verification has also been carried out to validate the simulated circuit.

**Keywords:** BLDC motor, PIC18F4331 microcontroller, Proteus VSM software, Pulse Width Modulation (PWM)

### INTRODUCTION

As the recent trend goes Brushless Direct Current (BLDC) motor have achieved huge popularity in recent era due to some remarkable advantages like high efficiency, high torque capability, lesser maintenance etc. over several conventional motors readily available in market. For its ease in control due to real time change of input data is another advantage of the software making it closer to practical design [10]. In this work, an attempt has been made for designing a low cost variable load constant speed microcontroller based drive for a three phase trapezoidal back-emf permanent magnet BLDC motor. An 8 bit PIC18F4331 microcontroller has been

1st page of my publication for... Shared with me - Google Drive CT 2022-23, Internal Marks, Ph...  
https://doi.org/10.1111/ijac.13303

11:02, 6:36 PM Adsorption effect of Zn<sup>2+</sup> and Co<sup>2+</sup> on the antibacterial properties of SiC-added porcelain ceramics - Mukherjee - 2020 - Internat...

International Journal of Applied Ceramic Technology / Volume 17, Issue 11, p. 327-332  
ORIGINAL ARTICLE

### Adsorption effect of Zn<sup>2+</sup> and Co<sup>2+</sup> on the antibacterial properties of SiC-porcelain ceramics

Arjak Bhattacharjee, Anshul Gupta, Managan Prem Anand, Pradyut Sengupta, Aditi Pandey, Tapas Kumar Bhattacharya

First published: 13 June 2019  
<https://doi.org/10.1111/ijac.13303>  
Citations: 1

#### Abstract

This investigation reports the adsorption effect of Cobalt and Zinc ions on the antibacterial properties of Silicon Carbide (SiC) added fired Porcelain based ceramics against *Escherichia coli* and *Staphylococcus aureus*. Incorporation of SiC in porcelain composition shows decrease in bulk density and increase in apparent porosity gradually upto 15 weight percent addition. The bulk density and apparent porosity of 15 wt% SiC added porcelain are 2.01 g/cm<sup>3</sup> and 24.03%, respectively. Phase and microstructural

1st page of my publication for... Shared with me - Google Drive CT 2022-23, Internal Marks, Ph...  
https://doi.org/10.1111/ijac.13303

SPRINGER LINK Log in

Menu Search

Home > [SV Applied Sciences](#) > Article

[Download PDF](#)

Research Article | Published 09 November 2019

### Mg<sub>0.5</sub>Zn<sub>0.5</sub>Fe<sub>2</sub>O<sub>4</sub>-polyurethane thin nanocomposite coating as broadband microwave absorber

Rajwati Bhattacharjee, Somnath Das, Chin Prakash, Akshendra Prasad Singh, Tapas Kumar Bhattacharya, Divyanshu Math, Somak Bhattacharjee & Santanu Das

[SV Applied Sciences](#) 1, Article number: 38 (2019)

1712 Accesses | 6 Citations | [Metrics](#)

First page of my publication for... Shared with me - Google Drive... CF 2020 02 Internal Status...  
mail.google.com/mail/u/0/params/MLt5grGw5p0CkD5rD1...  
Quantum Physics... Reported from... Resonance - Journals... +Filing Home Page... gupst07 - YouTube... wifu.org +Post... Physics - Sym...

**SCIENTIFIC REPORTS**  
nature research

**OPEN** Graphene oxide-ferrite hybrid framework as enhanced broadband absorption in gigahertz frequencies

Received: 31 October 2019  
Accepted: 24 November 2019  
Published online: 20 August 2020

Rajarshi Bhattacharyya<sup>1,4</sup>, Om Prakash<sup>2</sup>, Somnath Roy<sup>3</sup>, Akhilesh Pratap Singh<sup>1</sup>, Tapas Kumar Bhattacharya<sup>1</sup>, Pralay Maiti<sup>5</sup>, Somak Bhattacharyya<sup>6</sup> & Santanu Das<sup>7</sup>

The present investigation is focused on the *in-situ* synthesis of Graphene oxide (GO)-ferrite nanoparticle hybrid framework by gel combustion method followed by fabrication of homogeneous, structurally stable thin (~300–320 nm) hybrid polyurethane coating on a metallic aluminum substrate and its application on the properties of broadband absorption over the microwave frequency region. Microstructure studies of hybrid materials illustrated that small sized ferrite nanoparticles (~17 nm) are grafted on and through the graphene layers, which forms a homogeneous coating thereby. The hybrid nanocomposite coating demonstrated superior broadband absorption properties with absorptivity higher than 90% throughout a bandwidth of ~8 GHz, and moreover, it was found that with increased loading of GO to the nanocomposite, the bandwidth range of absorption frequency increases with enhanced absorptivity. The real part and imaginary part of the surface impedance values of the coating was obtained as 377 Ω and 0.0, respectively, which imply that the free space impedance of the hybrid nanocomposite coating is matching correctly. The nanocomposite coating showed ultra-high absorptivity over the frequency band of 8–12 GHz, which has numerous practical applications as radar absorbing materials (RAM), stealth technology, electromagnetic shielding, and related electromagnetic interference (EMI) management in onboard spacecraft and many more.

The rapid advances in computer technology, communication devices, and wireless electronics and their widespread applications with increased levels of electromagnetic pollution have led to the quest for developing novel electromagnetic interference (EMI) shielding materials. Traditionally metals and metal based compo...

Type here to search

Open: issue\_20543547.pdf - Adobe Acrobat Reader (64-bit)  
File Edit View Sign Window Help  
Home Tools jrar\_issue\_2054354...  
1 / 1 100%  
This file complies with the PDF/A standard and has been opened read-only to prevent modification. [Enable Editing](#)

[VOLUME 6 | ISSUE 2 | APRIL - JUNE 2019] e-ISSN 2348-1269, Print ISSN 2349-5138  
<http://ijrar.com/> Cosmos Impact Factor 4.236

**Biological Applications of Schiff base Metal Complexes-A Review**

**Debdulal Maity**  
Assistant Professor of Chemistry, Govt. College of Engineering and Ceramic Technology, 73,  
A. C. Banerjee Lane, Bellaghata, Kolkata-700010, West Bengal, India

Received: January 27, 2019 Accepted: March 10, 2019

**ABSTRACT:** Schiff bases synthesized from the condensation of an amino compound with carbonyl compounds and their complexes exhibit a wide range of biological activities including antifungal, antibacterial, antiviral, antitumor and anticancer properties. Over the recent few years, these complexes have gained much attention because of their unique biological properties. Many reports are published on their applications to biological activities of these compounds. Development of a new chemotherapeutic Schiff bases and their metal complexes is now attracting the attention of medicinal chemists. This review is nothing but a small attempt to show different examples of the most promising applied Schiff bases complexes in biological areas.

**Key Words:** Schiff base, Antifungal and antibacterial properties, Antiviral Activities, Anti-cancer agents

Type here to search



IEEE Publications (unauthenticated) | IEEE Xplore | IEEE

Control of Chaos in BLDC Motor Drive

Publisher: IEEE [Cite This](#) [PDF](#)

Authors: Abhijit Patra | Kishorendu Chakrabarty | Tribhuvan Nag | All Authors

1	92
Paper	Full
Citation	Text Views

**Abstract**

**Abstract:** This paper deals with the chaotic behavior of Brushless DC Motor (BLDCM) which is highly reliable, stable and efficient, but is a typical multivariable nonlinear system. The chaotic behavior of the BLDC motor can change the reliability and stability of the BLDC motor. In this paper the BLDCM system and its mathematical model has been dealt with. Finally the delayed feedback control is applied to control the chaos in BLDCM using PYRAGAS' METHOD OF CONTROL.

**Document Sections**

1. Introduction
2. MATHEMATICAL MODEL OF BLDCM

**More Like This**

Comparative study of stabilizing controllers for brushless DC motor drive systems  
IEEE International Conference on Electric Machines and Drives, 2006  
Published 2006

[Feedback](#)

14.7 ResearchGate

Search

Typ here to search

100% 2:02 PM 10/22/2025

**2017-18**

The screenshot shows a web browser window with the URL <https://iopscience.iop.org/article/10.1088/1475-7516/2018/03/044>. The page is from IOPscience, the Journal of Cosmology and Astroparticle Physics. The article title is "Strange stars in  $f(R, T)$  gravity" by Debabrata Deb<sup>1</sup>, Farook Rahaman<sup>2</sup>, Sebel Ray<sup>3</sup> and B.K. Guha<sup>1</sup>. It was published on 27 March 2018. The page includes a blue "Article PDF" button, a sidebar with download statistics (136 total downloads), a "Turn on MathJax" option, and social sharing icons. The abstract section is partially visible, starting with "In this article we try to present spherically symmetric isotropic strange star model under the framework of  $f(R, T)$  theory of gravity. To this end, we consider that the Lagrangian density is a". The browser's taskbar at the bottom shows several open PDF files and the system clock indicating 12:40 on 24-05-2023.

The image shows a screenshot of a web browser displaying a SpringerLink article. The browser's address bar shows the URL [link.springer.com/article/10.1145/egj/10052-018-0330-e](https://link.springer.com/article/10.1145/egj/10052-018-0330-e). The SpringerLink logo is in the top left, and search and login options are in the top right. The article title is "Anisotropic strange stars in the Einstein–Maxwell spacetime", published on 08 June 2018. The authors are Debabrata Deb, Maxim Khlopov, Farook Rahaman, Saibal Ray, and B. K. Guha. The article is from *The European Physical Journal C*, volume 78, article number 465 (2018). It has 1047 accesses and 47 citations. The abstract begins with "We present here a detailed analysis on the effects of charge on the anisotropic strange star candidates by considering a spherically symmetric interior spacetime metric. To obtain exact solution of the Einstein–Maxwell field equations we have considered the anisotropic". On the right side, there is a "Download PDF" button, a "Working on a manuscript?" section with a magnifying glass icon, and a "Sections" menu with options for "Abstract", "Introduction", "The MIT bag equation of state and the...", and "Basic stellar structure equations". The Windows taskbar at the bottom shows several open PDF files and the system clock at 13:17 on 29-05-2021.

World Scientific  
Connecting Great Minds

Subject Journals Books Major Reference Works Resources For Partners Open Access About Us Help

International Journal of Modern Physics D | Vol. 27, No. 06, 1850009 (2018)  
Research Papers

# Anisotropic strange star with Tolman $V$ potential

Debyendu Shee, Debatraja Deb, Shaunak Ghosh, Saibal Ray, and B. K. Guha

<https://doi.org/10.1142/S0218271818500094> | Cited by: 4

< Previous Next >

PDF/EPUB Tools Share Recommend To Library

## Abstract

In this paper, we present a strange stellar model using Tolman  $V$ -type metric potential

International Journal of  
Modern Physics D  
Vol. 27, No. 06

181007140714-0L.pdf 1810070410714-...pdf 1810081475-7524...pdf Show all X

13:17 29-05-2021

The image is a screenshot of a web browser displaying the article page for "Anisotropic strange stars under simplest minimal matter-geometry coupling in the  $f(R, \mathcal{F})$  gravity" on the Physical Review D website. The browser's address bar shows the URL [journals.aps.org/prd/abstract/10.1103/PhysRevD.97.084026](https://journals.aps.org/prd/abstract/10.1103/PhysRevD.97.084026). The page header includes the APS logo, navigation links for Journals, Physics Magazine, and Help/Feedback, and a search bar. The article title is prominently displayed, followed by the authors: Debajyoti Deb, B. K. Guha, Farook Rahaman, and Sabal Ray. The publication information is "Phys. Rev. D **97**, 084026 – Published 16 April 2018". Below the title, there are social media sharing icons for Twitter, Facebook, and a "More" button. A navigation bar offers options for "Article", "PDF", "HTML", and "Export Citation". The main content area features an "ABSTRACT" section with a right-pointing arrow, followed by the beginning of the abstract text: "We study strange stars in the framework of  $f(R, \mathcal{F})$  theory of gravity. To provide exact solutions of the field equations it is considered that the gravitational Lagrangian can be expressed as the linear function of the Ricci scalar  $R$  and the trace of the stress-energy tensor  $\mathcal{F}$ , i.e.  $f(R, \mathcal{F}) = R + 2\chi\mathcal{F}$ , where  $\chi$  is a constant. We also consider that the". To the right of the abstract is an "Issue" box indicating "Vol. 97, No. 8 — 10 April 2018". The browser's taskbar at the bottom shows several open PDF files and the system clock displaying 13:40 on 29-05-2023.

ScienceDirect

Access through your institution Purchase PDF

Article preview  
 Abstract  
 Introduction  
 Section snippets  
 References (63)  
 Cited by (121)  
 Recommended articles (8)

**Annals of Physics**  
 Volume 307, December 2017, Pages 219–252

**Relativistic model for anisotropic strange stars**

Debarati Deb,<sup>a</sup> Sourav Roy Chowdhury,<sup>a</sup> Saibal Ray,<sup>a, R. Biswas, Farook Bahaman,<sup>a</sup> B.K. Guha,<sup>a</sup></sup>

Show more

+ Add to Mendeley Share Cite

<https://doi.org/10.1016/j.aop.2017.10.018> Get rights and content >

Abstract

FEEDBACK

20100740754-0L.pdf 10.1016/j.aop.2017.10.018.pdf 10.1088/1475-7524.pdf Show all

IEEE Xplore

Effect of smoothing reactor on the performance of a PWM chopper fed Dc motor drive

Publisher: IEEE [Cite This](#) [PDF](#)

Susmita Kundu; Debasish Chatterjee; Krishendu Chakrabarty All Authors

3 Paper Citations 77 Full Text Views

**Abstract**

This paper presents the qualitative change in the speed response of a pwm dc/dc converter fed series motor drive system due to different choices of values for smoothing reactor. In particular, a detailed investigation on bifurcation behavior of motor speed has been performed for identifying the permissible range of the smoothing reactor for desired stable period-operation of the drive system over a wide zone of load torque. With only speed loop

Supplement your engineering curriculum with new eBooks from IEEE

LEARN MORE >

More Like This

A New Discovery and Analysis on Chien and BRUcation in DC Motor Drive System with Full-Bridge Converter

29th IEEE Conference on Intelligent Electronics and Applications

Published 2009

Feedback

# Digital Signature Protocol for Visual Authentication

Anirban Goswami<sup>1</sup>, Ritesh Mukherjee<sup>2</sup>, Soumit Chowdhury<sup>3</sup>, and Nabin Ghoshal<sup>4</sup>

<sup>1</sup>Department of Information Technology, Techno India, India

<sup>2</sup>Department of Advanced Signal Processing, Centre for Development of Advanced Computing, India

<sup>3</sup>Department of Computer Science and Engineering, Government College of Engineering and Ceramic Technology, India

<sup>4</sup>Department of Engineering and Technological Studies, University of Kalyani, India

**Abstract:** Information security in digital domain is all about assurance of Confidentiality, Integrity, Availability (CIA) extending authenticity and non-repudiation issues. Major concerns towards implementation of information security are computational overhead, implementation complexity and robustness of the protocol. In this paper, we proposed a solution to achieve the target in line with state of the art information security protocol. The computational overhead is significantly reduced without compromising the uncertainty in key pair generation like existing digital signature schemes. The first section deals with collection of digitized signature from an authentic user, generation of shares from the signature, conversion of a cover image to quantized frequency form and casting of a share in appropriate coefficients. In the second section, share detection is done effectively and the data security is confirmed by overlapping the detected share with the other share. Specific constraints are fitted appropriately to recreate a clean digitized signature, reform the cover image using Discrete Cosine Transform (DCT) and quantization method, select frequency coefficients for share casting and manipulate the casting intensity. Impressive effort is made to ensure resistance to some of the common image processing attacks. The undesired white noise is reduced considerably by choosing a suitable threshold value. The selection of pseudorandom hiding position also helps to increase the robustness and the experimental results supports the efficacy of the algorithm.

**Keywords:** Share, DCT and IDCT, image compression, data hiding, SSIM, collusion attack.

Received July 6, 2016; accepted August 21, 2017

## 1. Introduction

The technological escalation and elaborate use of the network domain has extended the use of the Internet. But this advancement has proportionally increased the importance to shield confidential or copyright information through efficient techniques. The most common method of information confidentiality is to encrypt and then imperceptibly hide the sensitive data to restrain intruders.

Some of the existing data hiding techniques explained fabrication of authentication signals into a digital file for assuring the integrity or fidelity of the file [15, 19, 24]. The application of copyright protection also depicts content ownership claim where a digital file is used to embed a visible or invisible digital watermark [2]. In case of covert communication [11, 14] secret information is hidden into a cover file and the intended receiver only can extract the hidden information to complete the communication.

The generation of shares from an information and subsequent sharing of the shares was first explained by Shamir [20]. The challenge is in recovering the information appropriately when the related shares are combined. Conventionally, the two concepts viz. data hiding and information sharing can both be an integral part of information security.

Nowadays researchers are concentrating more on

encryption and masking based image authentication techniques [7, 12] along with exploiting the redundant information of an image to fabricate the secret information. In context to the authentication method, the existing algorithms can be broadly classified as spatial and transform domain techniques. In the spatial domain techniques, high volume of payload can be fabricated with minimum computational complexity but less resistance to low pass filtering and common image processing attacks. Hence widely accepted algorithms are mostly in transform domains i.e., Discrete Cosine Transform (DCT), Discrete Fourier Transform (DFT) and Discrete Wavelet Transform (DWT) etc., [16, 21, 22]. Prior to these transform techniques, the concept of Spread Spectrum based watermarking techniques also exploited Human Visual Systems (HVS) [5, 9, 18].

Cox *et al.* [5] suggested DCT domain to be an extensively used transform in Joint Photographic Experts Group (JPEG) compression. In DCT domain the possibility of coefficients getting affected by compression are known at prior and as a protective measure use of middle-band frequency coefficients to embed the secret data was first proposed by Koch and Zhao [9].

As per the study of the existing research, some spatial and transform domain techniques are chronologically mentioned. Bender *et al.* [3] suggested

## Hybrid Parallel Programming Using Locks and STM

Ryan Saptarshi Ray<sup>1\*</sup>, Parama Bhaumik<sup>2</sup>, Utpal Kumar Ray<sup>3</sup>

<sup>1</sup>Dept. of Information Technology, Jadavpur University, Kolkata, India

<sup>2</sup>Dept. of Information Technology, Jadavpur University, Kolkata, India

<sup>3</sup>Dept. of Information Technology, Jadavpur University, Kolkata, India

*\*Corresponding Author: ryan\_ray@rediffmail.com, Tel: 9841320613*

Available online at: [www.ijcsesonline.org](http://www.ijcsesonline.org)

Received: 17-Sep-2017, Revised: 30-Sep-2017, Accepted: 13-Oct-2017, Published: 30-Oct-2017

**Abstract**— Software Transactional Memory (STM) is a new alternative approach to locks which solves the problem of synchronization in parallel programs. In STM users have to identify the critical sections in the program and enclose them within transactions by using appropriate STM function calls. Then STM automatically by its internal constructs ensures synchronization in the program. This paper shows how to solve the problem of synchronization in parallel programs by using a hybrid programming approach using both locks and STM. Locks use pessimistic approach to solve the problem of synchronization in parallel programs. STM uses optimistic approach to solve the problem of synchronization in parallel programs. Both the optimistic and pessimistic approaches have some advantages and disadvantages. The disadvantage of optimistic approach is that transactions are aborted when validation cannot be done. This approach works well when there are no conflicts (hence the term optimistic) but wastes work when there are conflicts. Aborting of transactions is a severe problem when the transactions are long and interactive. The disadvantage of pessimistic approach is that large number of locks in the program will lead to very slow execution speed which may cancel out the gains made by solving the problem in parallel. The hybrid approach combines the advantages of the optimistic and pessimistic approaches removing their disadvantages without any degradation of performance.

**Keywords**— Multiprocessing, Parallel Processing, Locks, Software Transactional Memory, Hybrid Parallel Programming

### I. INTRODUCTION

Ensuring synchronization is a very important problem in parallel programs. Currently locks are used to solve this problem. Locks use pessimistic approach. Software transactional memory (STM) is a promising alternative approach for parallel computation which does not have most of the limitations of the locks-based approach. STM uses optimistic approach. Both the optimistic and pessimistic approaches have some disadvantages.

In the pessimistic approach it is always assumed that results will surely be erroneous if multiple threads execute the critical section simultaneously which may not always be the case. The more the number of critical sections in a program the more will be the number of locks. Large number of locks in the program will lead to very slow execution speed which may cancel out the gains made by solving the problem in parallel [1].

The main disadvantage of the optimistic approach is that in those types of problems where simultaneous execution of critical sections by multiple threads leads to inconsistency the same critical sections have to be executed again and again until the values are consistent. This may lead to drastic degeneration of performance and may overset all the gains achieved by parallel execution [2].

In this paper we present a hybrid approach using both locks and STM to solve the problem of synchronization in parallel

programs. The programming example considered is finding out the minimum element in an array. It is a small prototype of a real-life example in which different areas of a database are accessed in real time in parallel.

In the example which we have used the simultaneous execution of multiple critical sections by multiple threads will lead to inconsistency. Thus in this case the use of pessimistic approach is more advantageous. When the optimistic approach (STM) was used the transactions were aborted a large number of times as simultaneous execution of multiple critical sections by multiple threads was frequently leading to inconsistency. Thus the same critical sections were executed again and again. This resulted in large execution time (24 sec). The disadvantage of optimistic approach is that transactions are aborted when validation cannot be done. This approach works well when there are no conflicts (hence the term optimistic) but wastes work when there are conflicts. Aborting of transactions is a severe problem when the transactions are long and interactive [3]. When the pessimistic approach (locks) was used the execution time was 5 seconds. In the hybrid approach the pessimistic approach was used in one half of the array and optimistic approach in the other half. The execution time was 5 seconds. Thus we can say that the hybrid approach combines the advantages of the optimistic and pessimistic approaches removing their disadvantages without any degradation of performance.

In the ideal case hybrid approach may also lead to



## FAULT-TOLERANT STM (SOFTWARE TRANSACTIONAL MEMORY) USING REPLICATION

Ryan Saptarshi Ray, Parama Bhaumik and Utpal Kumar Ray  
Dept. of I.T, Jadavpur University, Kolkata, West Bengal

### ABSTRACT

*Software Transactional Memory (STM) ensures synchronization in parallel programs without suffering from the drawbacks of locks. Fault tolerance is an important issue in STM. In this paper we ensure fault tolerance in STM by using replication. Whenever any transaction suddenly aborts another transaction starts which performs the same operations as the transaction which has aborted. Thus even if any transaction fails or is aborted due to some reason then the result is not affected. We have also seen that there is no performance degradation if this approach is used. We have replicated only the important transactions so that redundancy is kept to the bare minimum. Thus we can say that we have developed an approach using replication which has made STM fault-tolerant without any performance degradation keeping redundancy to the bare minimum.*

**Keywords:** Multiprocessing, Parallel Processing, Locks, Software Transactional Memory, Fault Tolerance.

**Cite this Article:** Ryan Saptarshi Ray, Parama Bhaumik and Utpal Kumar Ray, Fault-Tolerant STM (Software Transactional Memory) Using Replication. *International Journal of Computer Engineering & Technology*, 9(3), 2018, pp. 175–181.  
<http://www.iaeme.com/IJCET/issues.asp?JType=IJCET&VType=9&IType=3>

### 1. INTRODUCTION

Ensuring synchronization is a very important problem in parallel programs. Currently locks are used to solve this problem. Software transactional memory (STM) is a promising alternative approach for parallel computation which does not have most of the limitations of the locks-based approach. [1] However fault-tolerance is a very important issue in STM.

Fault-tolerance is the capability of a computer system, electronic system or network to deliver uninterrupted service, despite one or more of its components failing. Fault tolerance also resolves potential service interruptions related to software or logic errors. The purpose is to prevent catastrophic failure that could result from a single point of failure. In STM if any transaction fails or is aborted for some reason then the result is incorrect. Thus we can say

Applied Computing and Informatics  
Volume 11, Issue 2, July 2017, Pages 181-189

### Network centrality based team formation: A case study on T-20 cricket

Parvitha Devi,\* M. Maheswari, G. Gopals,\* M. Sarathi, S. S. A. S.

<https://doi.org/10.1016/j.aci.2016.11.001>

Order a Creative Commons license

**Abstract**  
This paper proposes and evaluates the novel utilization of *small world network* properties for the formation of team of players with both best performances and

**Recommended articles**  
A Survey on HTTPS Implementation by Android Apps: Issues and...  
Applied Computing and Informatics, Volume 11, I...  
Ramesh Wani, Michael Wolf  
View PDF

Improving the Cosine Consistency Index for the analytic hierarchy process lin...  
Applied Computing and Informatics, Volume 11, I...  
Gaurav Mahesh, Apoorv Kumar Kati  
View PDF

Transmission performances of solitons in optical wired link  
Applied Computing and Informatics, Volume 11, I...  
D. Anil Kumar, H. Akmal  
View PDF

Show 3 more articles

Feedback

Outline  
Abstract  
Keywords  
1. Introduction  
2. Related work  
3. Proposed approach for team formation  
4. Selection of players  
5. Discussion  
6. Conclusion  
Acknowledgement  
Appendix A  
References  
Show full outline

Cited by (12)

View PDF Download full issue

Windows taskbar: 30°C, 31/05/2023